


outline drawing:

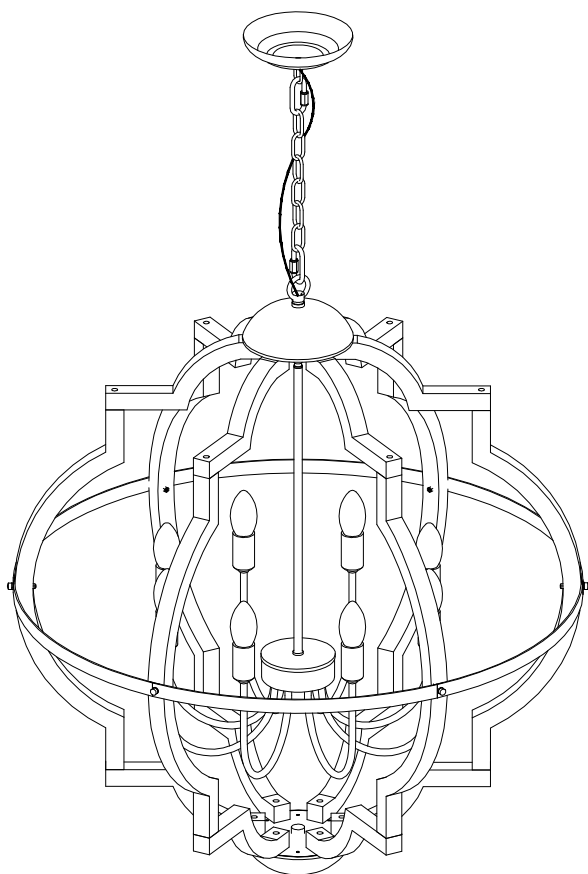


model:

Technical data: Power supply
voltage 110-120V, bulb type
E12Max40Wx8PCS (not included)

CAUTION



- Before installing the lighting fixtures, please check the insulation of the wires for any cuts, wear, or possible damage during transportation. If the wires are defective, do not attempt installation .
- In some countries, electrical installation work can only be carried out by authorized electrical contractors. Please contact the local power department for advice.



IMPORTANT Before starting the installation work, please make sure to cut off the power supply to the circuit.

IMPORTANT Keep children away from the installation process .

Required tools (not included):



Ladder



Phillips
screwdriver



pincers

Required tools (including):




expansion
screws



glove

The hardware kit provides:



Lights+Ancient



carabiner




mounting screw




ring



CONNECTORS



sling chain



tray




Installation board



Flat hat




Midpiece of a circle




Semicircular cap



Middle tube



Short decorative wood

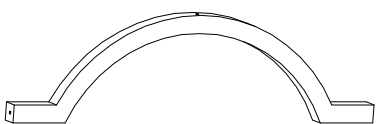

Long decorative wood



Decorative iron sheet



cable tie




Gecko rubber stopper



Self tapping screws


•The components displayed on each lamp may vary slightly

Step 1

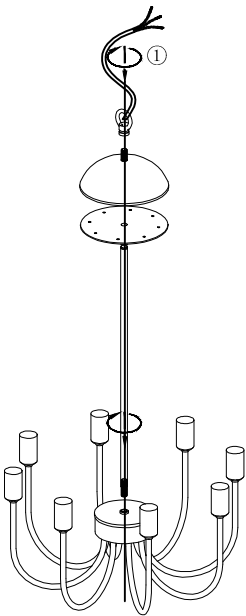


① Hanging ring+middle pipe+lamp and ancient connection fastening.

Step 2

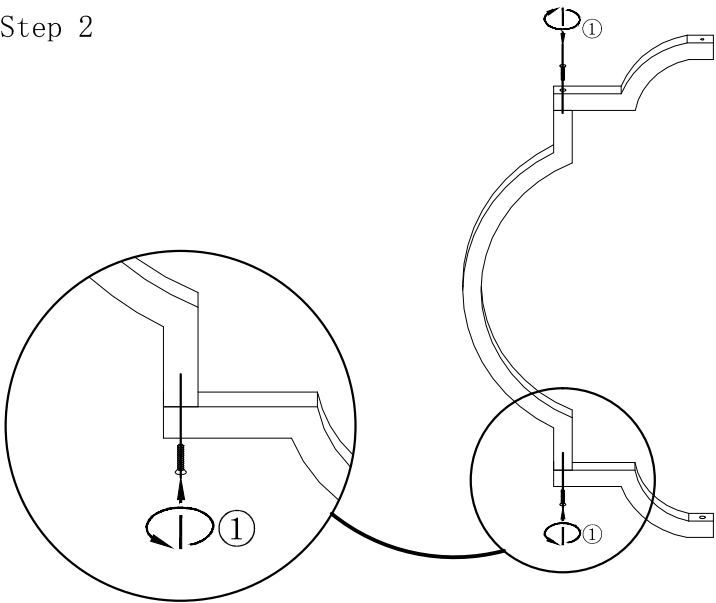


① Thread the screw through the hole in the short decorative wood and connect it tightly with the tooth hole in the long decorative wood. For the remaining installation, refer to the following steps.

Step 3

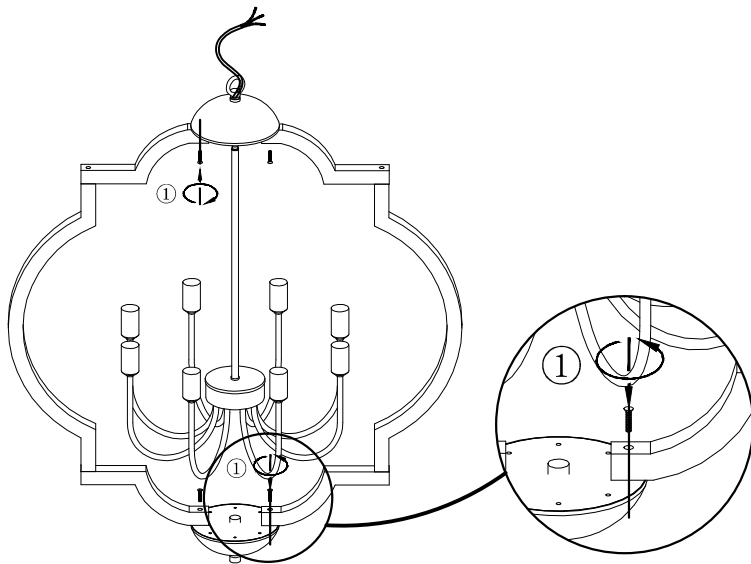


① Thread the screw through the hole in the short decorative wood and connect it tightly to the circular center piece. Refer to this step for the remaining rows.

Step 4

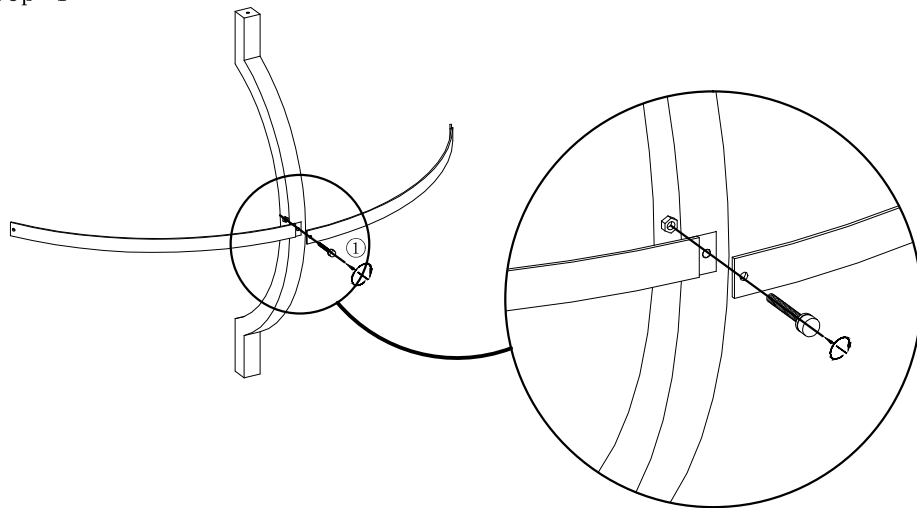


① Thread the full threaded rod with a cap through the holes in the decorative piece and long decorative wood, along with the nut knob.

Step 5

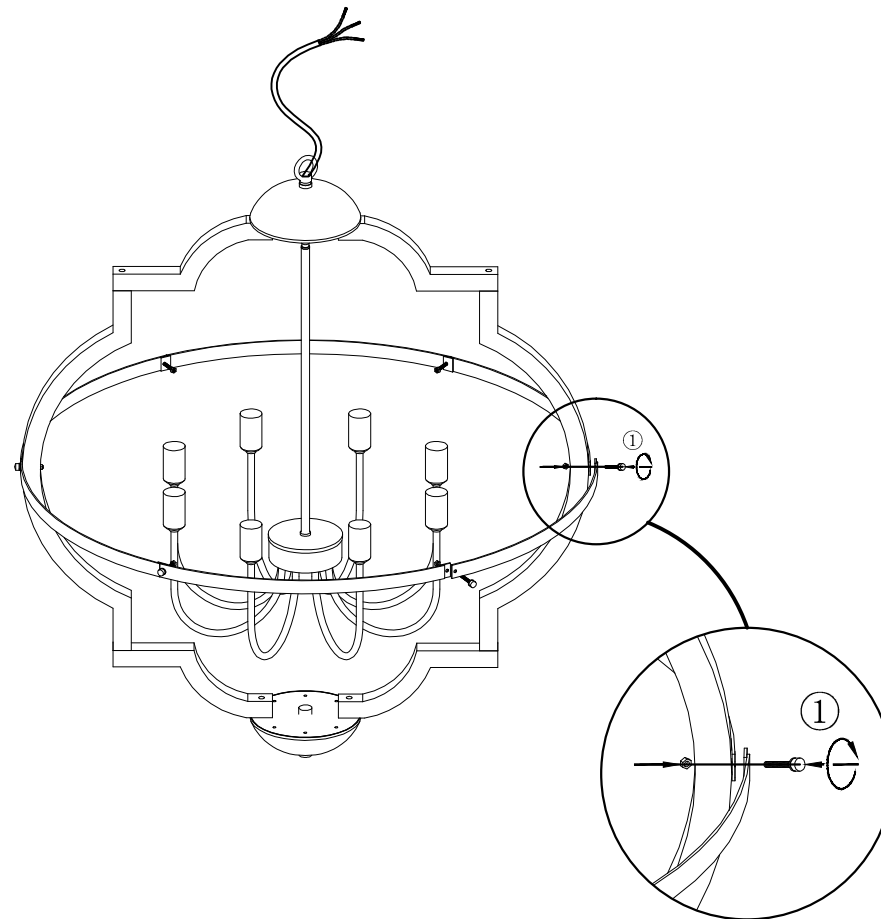

① Refer to step 4 for the installation of the remaining decorative pieces .

Step 6

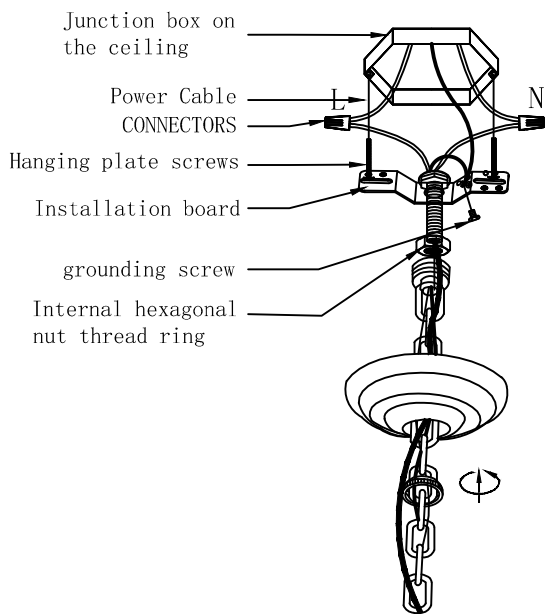

- ① Thread all the wires through the canopy and installation kit.
- ② Connect the power cable with two cable connectors.
- ③ Connect the grounding wire and tighten it with the grounding screw.
- ④ Install the fixing screws into the mounting plate, install the installation unit under the junction box, and tighten with two mounting screws.
- ⑤ Fix the canopy in place using a suspension ring. Tighten the screw ring and hex nut with a wrench to tighten the hex nut.
- ⑥ Tighten the fixing screws on the rain shelter holes.
- ⑦ Swivel the lid onto the canopy.

White or smooth fixed line

White power supply line

Black or smooth fixed line

Black power supply line

Connect the black or red wire (with an L sticker on the wire) to:	Connect the white wire (with N stickers on the wire) to:
black	white
Parallel lines - pt&l (circular and smooth)	Parallel lines - spri&l (square and ridge shaped)
Transparent, brown, gold or black (without tracer)	Transparent, brown, gold or black (with tracer)
Copper core insulated wire (excluding GREEN)	Silver conductor insulated wire (excluding GREEN)


dimple

foundation bolt

Grounding wire of junction box

Fixture grounding wire

Step 7

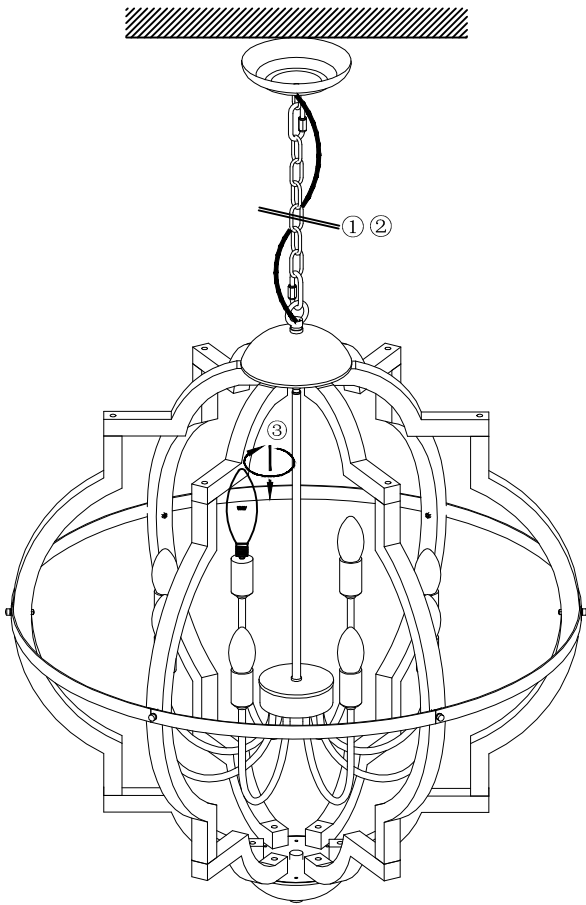

- ①② This depends on the height of your ceiling and the desired suspension length. You can measure the chain and adjust the locking buckle to achieve the desired chain length.
- ③ Tighten the light bulb (E12 maximum 40W, not included).