

Assembly Instruction Sheet

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: Integrated LED 22W

Compatible Dimmer Switches: Lutron DVELV-300P or Lutron SELV-300P.

Estimated Assembly Time: 20-30 minutes


Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Package Contents




A Crossbar
x 1




B Mounting Screw
x 2



C Allen Wrench
x 1

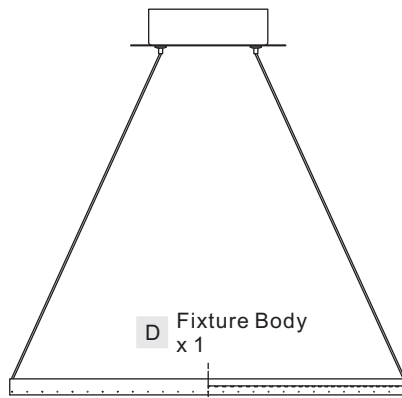


D Fixture Body
x 1

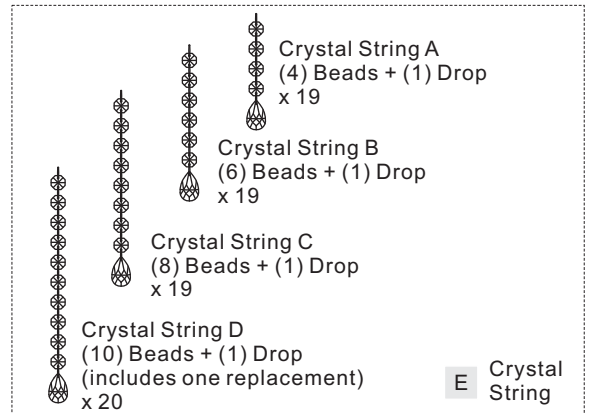


STEP 1 - Adjust the Fixture Body Height

- By using the Allen Wrench (C), unscrew the set screw on the cable clasp. Push the pin on the bottom of the ceiling canopy and adjust the cable to your desired hanging height. Release your hand on the pin and move the cable clasp to the hex nut inside of the ceiling canopy. Tight the set screw on the cable clasp until snug to engage the cable.
- Move the wire clasp to the hex nut inside of the ceiling canopy. Carefully tuck all slack wires inside of the ceiling canopy.

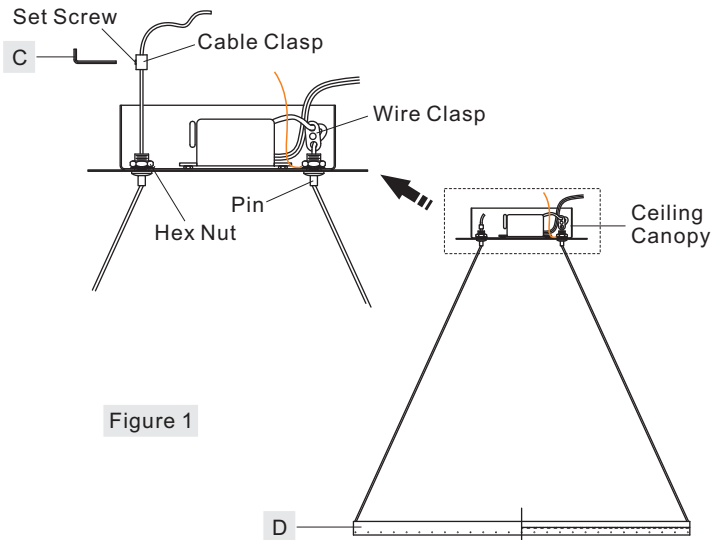


STEP 2 - Attach Crossbar to Outlet Box

- Attach the Crossbar (A) to Outlet Box and secure by threading Outlet Box Screws (not supplied) into the Mounting Holes on the Outlet Box. Tighten until snug.



STEP 3 - Wire Connections

- Wrap bare or green ground wire around green ground screw on the crossbar, no less than 2 inches from the end of the wire. Tighten the green ground screw.
- Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

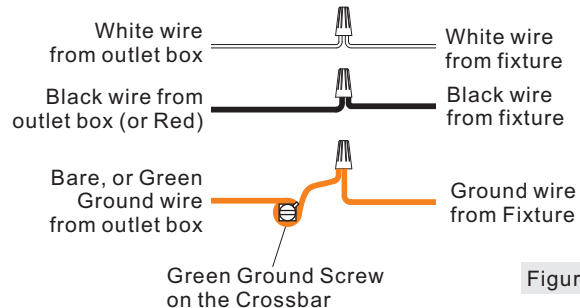

STEP 4 – Attach Fixture Body to Crossbar

A. Fit excess cord and electrical wires in the ceiling canopy properly. Line up the holes on the side of the ceiling canopy to the mounting holes on the Crossbar Assembly (A). Secure them with Mounting Screws (B). Tighten until snug.





Figure 4

STEP 5 – Attach Crystal Strings

A. (Refer to CRYSTAL STRINGS DISTRIBUTION) Attach Crystal Strings (E) to the Fixture Body (D).

Your fixture is now assembled and ready to use. Enjoy!

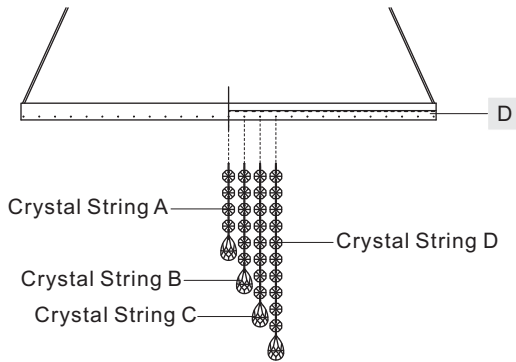




Crystal String A
Crystal String B
Crystal String C
Crystal String D



CRYSTAL STRING DISTRIBUTION

Figure 5

FINISH: POLISHED CHROME

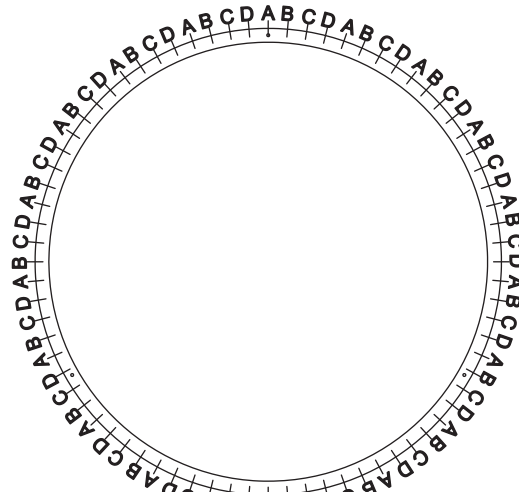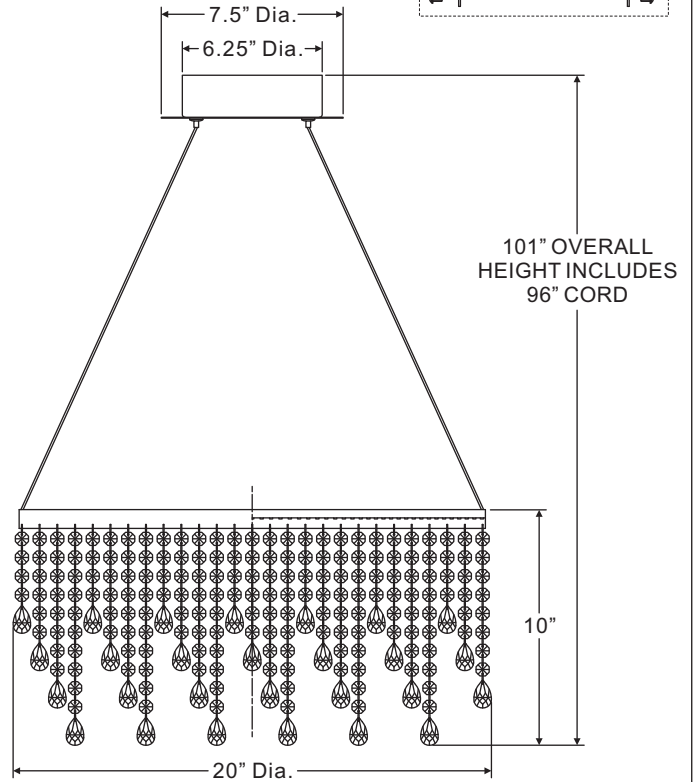

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"