


Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

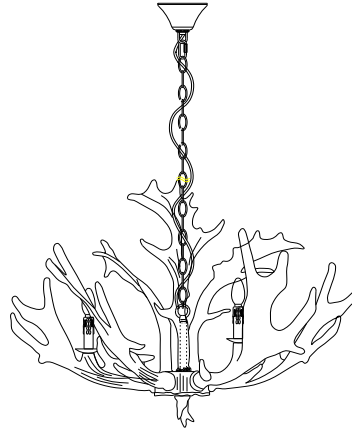

Care and Cleaning















To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Nut		3X	H	Closable link/cap		2X
B	Mounting Plate		1X	I	Fixture Loop		1X
C	Ground Screw		1X	J	Chain		1X
D	Mounting Screw		2X	K	Socket sleeve		6X
E	Canopy		1X	L	Bulb		6X
F	Hanging Loop		1X	M	Lamp Body		1X
G	Canopy Nut		1X	N	Finial		1X

Installation

Step 1

Unpack all parts from cartons carefully.

Screw the Chain(J) to the Hanging Loop(F) and the Fixture Loop (I) with Closable link/cap (H) as diagram.

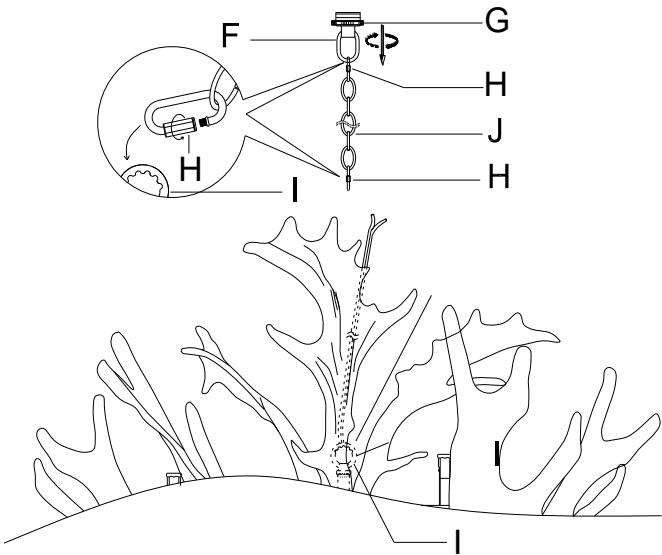


Step 2

Weave the 2 wire power cord and bare ground wire through every other loop to the top of chain(J),center holes of Hanging Loop(F)&Canopy(E)&Mounting Plate(B) as diagram.


Insert the threaded tube of the Mounting Plate(B) into the center hole of the Hanging Loop(F),rotate the Mounting Plate(B) clockwise till tight.

Slide the Canopy Nut(G) then the Canopy(E) to the end of the Chain(J).

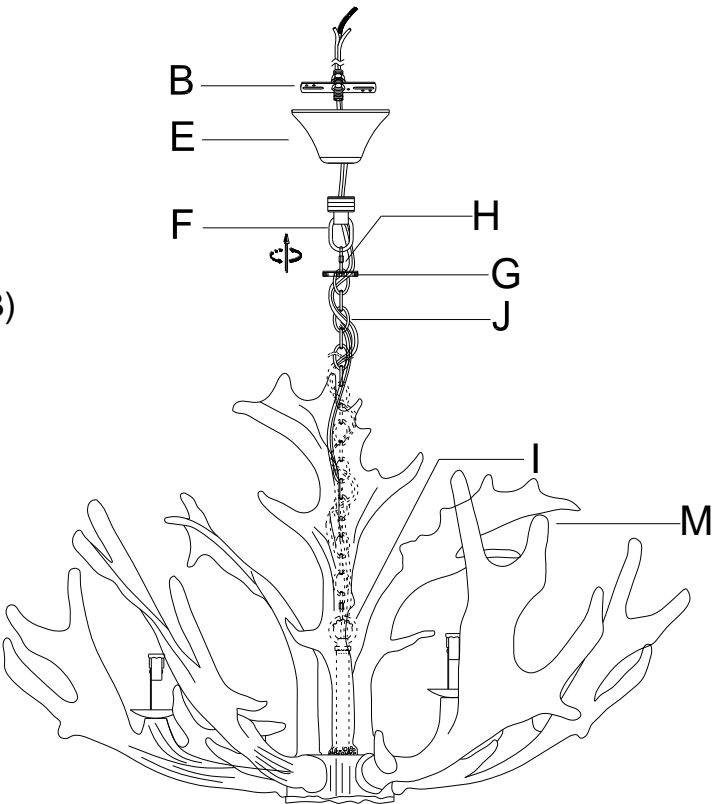


Step 3 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 4

Attach the Mounting Plate (B) onto the junction box by inserting two Mounting Screws (D) and turning clockwise till tight.


Slide the Canopy (E) upward along the chain(J) till the ceiling surface. Fix the Canopy(E) by rotating the Canopy Nut(G)clockwise to engage it with the threaded portion of the Hanging Loop (F) until secure. Do not over tighten this nut.

Attach the Finial(N) onto the threaded portion of the bottom of the lamp body and rotate it clockwise till tight.

Place each Socket Sleeve(K) onto each socket until secure.

Insert the bulbs(L) into the sockets until secure.
DO NOT EXCEED THE SPECIFIED WATTAGE.

**PLEASE USE TYPE"B" BULB MAX 40-WATT
OR CFL BULB MAX 9-WATT
THERE ARE 6PCS 25-WATT TYPE"B" BULBS
IN THE BOX.**

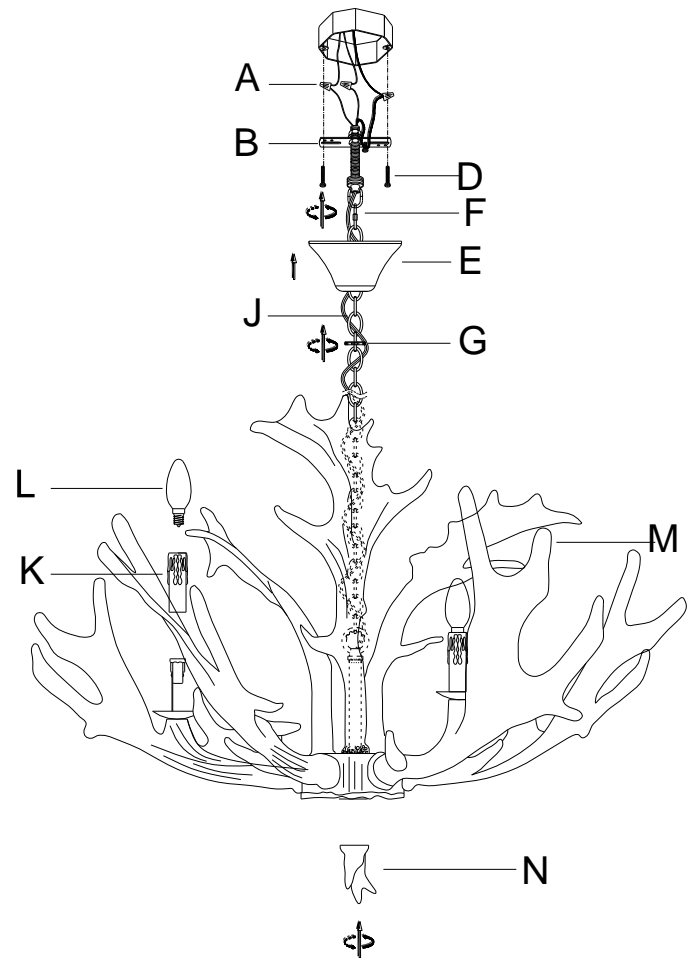

Step 5

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP

