

Positano

FLAME TOWER



QUICK START GUIDE · THE CAPRI · POSITANO COLLECTION

Your first evening.

Una sera a Positano — six steps, one sunset.

17:00	17:30	18:00	18:30	19:00	23:00
<i>Arrivo</i>	<i>Il Gas</i>	<i>La Prova</i>	<i>Accensione</i>	<i>Il Calore</i>	<i>Buonanotte</i>
UNPACK	CONNECT	LEAK TEST	LIGHT	WARMTH	SHUT DOWN



Outdoor use only. Read your Owner's Manual before assembly and first use.
LHI-CAPRI

17:00*Arrivo*

STEP 1

Unpack and place your tower

- Unbox with two people. If your Capri arrived flat-pack, assemble it first using the Assembly Instructions in your Owner's Manual.
- Remove all foam, ties and protective film. Inspect the glass column. Never operate with cracked or chipped glass.
- Stand it on firm, level, non-combustible ground in open air, clear of awnings, branches and walls by the distances in your Owner's Manual.

17:30*Il Gas*

STEP 2

Connect the fuel

- **Propane.** Start with the control OFF and the cylinder valve closed. Set a standard 20 lb LP cylinder upright in the base.
- Thread the regulator onto the cylinder valve clockwise, hand-tight only. Keep the hose free of kinks and clear of hot surfaces.
- **Natural gas.** A licensed gas professional makes the connection to your gas line. Fuel conversions are done only by a qualified technician with the Lava Heat kit.

18:00*La Prova*

STEP 3

Test every connection

- Mix equal parts dish soap and water. With the control OFF, slowly open the cylinder valve.
- Brush the mix on every connection: cylinder valve, regulator and both hose ends. Growing bubbles mean a leak. Close the valve, re-tighten and test again.
- Still bubbling? Do not use the heater. Call us. Never check for leaks with a flame. Repeat at every cylinder change.

18:30


Accensione

STEP 4

Light the flame

Batteries first. The igniter runs on one AA (1.5V) battery, hidden behind the igniter button.

1. Unscrew the igniter button from the control panel.
2. Slide in the AA battery, + end facing out.
3. Screw the button back on firmly.

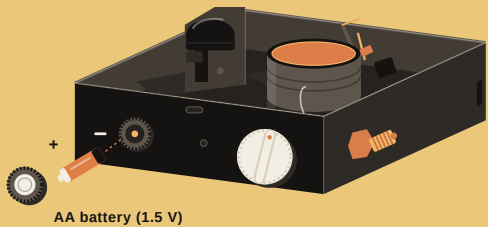

No battery, no spark.

THE CAPRI · KNOB IGNITION

1. Open the cylinder valve fully.
2. Push in the knob, turn to PILOT and hold. Press the igniter until the pilot lights.
3. Hold 30 seconds, release, then turn to your setting.

No flame after a few tries? Turn to OFF and wait five minutes for gas to clear before trying again. Your control panel decal is the final word on markings.

19:00

Il Calore

STEP 5

Find your comfort zone

TruBTU™ measures what you actually feel: air temperature at set distances from the flame on a 50°F evening.

MODEL	INTIMATE	CONVERSATION	EDGE
The Capri	3 ft · 70°F	5 ft · 64°F	8 ft · 60°F

The glass column and hood run very hot. Keep children, pets and fabrics clear, and turn off in strong wind.

23:00

Buonanotte



STEP 6

Shut down for the night

- Turn the control to OFF, then close the cylinder valve fully.
- Let the tower cool completely before fitting its cover.
- Store propane cylinders outdoors and upright, never in a home or garage.

How far the warmth reaches

What the Capri feels like on a 50°F evening, seen from the side and from above.

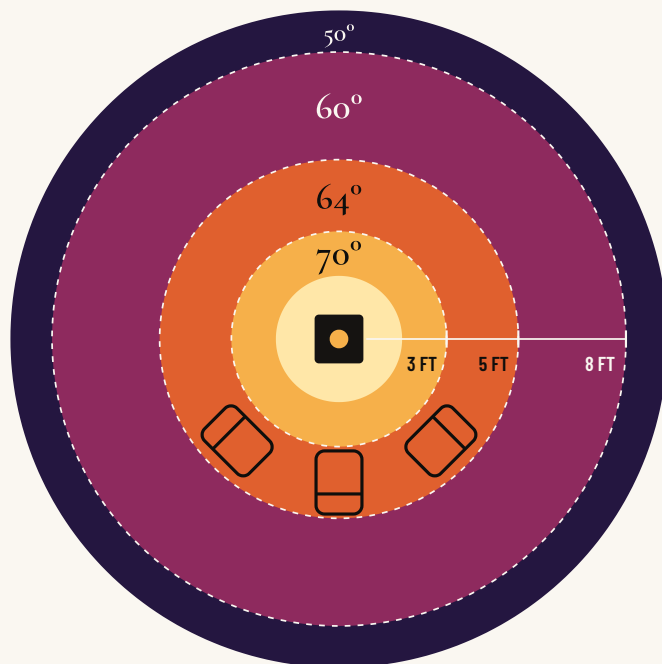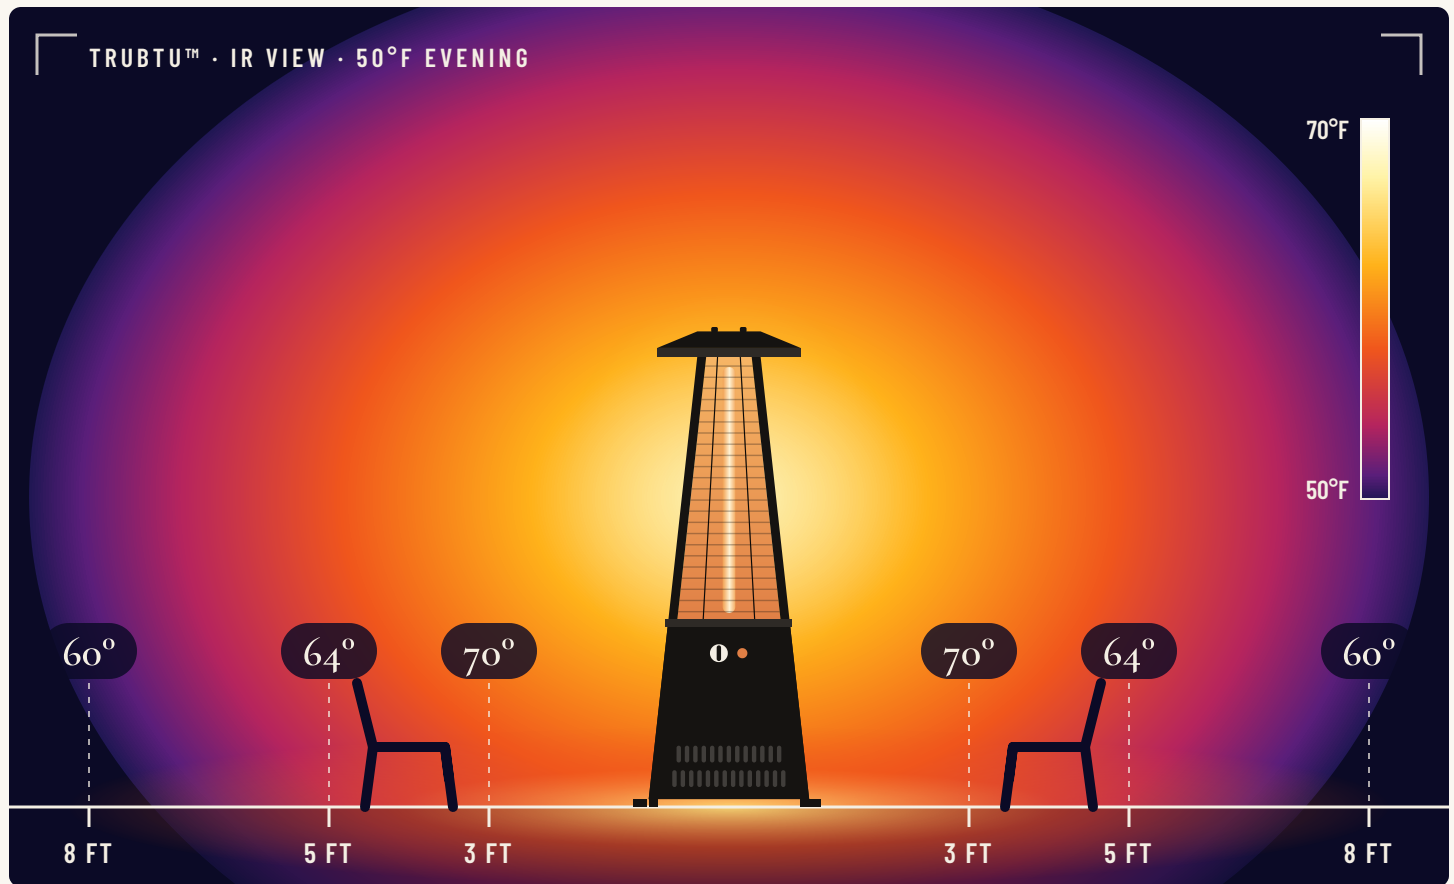

- TOASTY · ABOUT 70°F**
Within 3 ft. Warm hands and close conversation.
- COMFORTABLE · ABOUT 64°F**
3 to 5 ft. The sweet spot for your chairs.
- NOTICEABLE · ABOUT 60°F**
5 to 8 ft. The outer edge of the warmth.
- EVENING AIR · 50°F**
Beyond 8 ft. For a bigger group, add a second tower.

Drawn to scale: the Capri stands 72 in tall. TruBTU™ measured on a 50°F evening in still air; wind, humidity and nearby walls change what you feel.

SAFETY FIRST, ALWAYS

If you smell gas

1. Shut off gas to the appliance.
2. Extinguish any open flame.
3. If the odor continues, move away and immediately call your gas supplier or fire department.

OUTDOOR USE ONLY

Never use inside a home, garage, tent, vehicle or any enclosed space. Carbon monoxide can kill.

La Cura *care through the seasons*

THE FINISH

Mild soap, warm water and a soft cloth. No abrasives or solvents. By the coast, rinse off salt air regularly.

BURNER & HOSE

Each season, check the hose for cracks and clear insects or webs from the burner and air openings.

THE GLASS

Clean only when fully cool, with glass cleaner and a soft cloth. Replace cracked glass before the next use.

COVER & STORE

Cover the tower once cool. Disconnect and store the propane cylinder outdoors when not in use.

LIFETIME FRAME • 5 YEARS PARTS • 5 YEARS FINISH • 1 YEAR BURNER & GLASS

Parts only; labor and freight not included. Full terms at lavaheat.com/warranty-and-product-care



WE'RE HERE TO HELP

customerservice@lavaheat.com · 310-559-1700

lavaheat.com/troubleshooting

Lava Heat Italia · 940 W. Washington Blvd., Los Angeles, CA
90015 · Est. 2001

*Buona
serata.*