

NOTICE

- *Please make sure that you have all parts indicated and they are in good condition before you begin assembly of this item. Refer to part list and hardware list below for guidance.
- *This item should be assembled on a soft surface to prevent scratching the finish during assembly.
- *This item may require periodic tightening.
- *If you are having difficulty, our friendly Customer Care team is always here to help.










PREPARATION

- *Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.
- *If any part is missing or damaged, do not attempt to assemble the product.
- *Estimated Assembly Time: 15 minutes.
- *Tools Required for Assembly (included): Allen Key


CARE AND MAINTENANCE

- Spot clean using a mild water-free solvent. Only a professional cleaner should undertake a complete overall cleaning.
- The use of steam or water-based cleaners may cause excessive shrinking or staining.

Parts List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Front Leg		1X
B	Front Leg		1X
C	Back Leg		1X
D	Back Leg		1X
E	Seat		1X
HW1	Bolt M8 x 60MM		8X
HW2	Spring Washer 8.5 mm		8X
HW3	Flat Washer 9 mm		8X
HW4	Allen Key		1X

Product Dimensions: 22.80" W x 27.20" D x 29.90" H

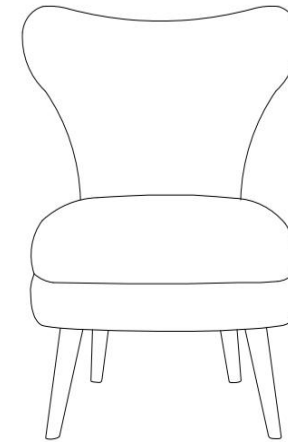

Weight Capacity: 275 lbs

WARNING: DO NOT STAND ON CHAIR

WARNING: DO NOT OVER TORQUE BOLTS

PREPARATION

*Before beginning assembly of product, make sure all parts are present. Compare parts with part contents list and hardware contents list.


*If any part is missing or damaged, do not attempt to assemble the product.

*Estimated Assembly Time: 15 minutes.

*Tools Required for Assembly (included): Allen Key

*If you are having difficulty, our friendly Customer Care team is always here to help.


1



Legs inside here.


STEP 1: OPEN THE ZIPPER ON THE BOTTOM OF THE SEAT AND TAKE OUT LEGS AND HARDWARE.

2

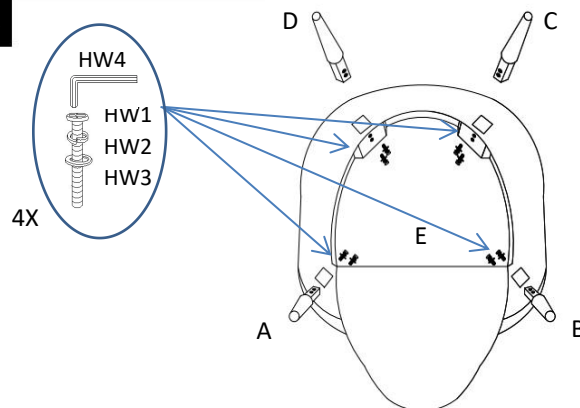


STEP 2: PUT THE WASHERS ON THE SCREW IN THE ORDER SHOWN IN THE PICTURE, INSERT THE LEGS AND SCREW IN THE SCREWS BUT DON'T TIGHTEN COMPLETELY. REPEAT THE SAME STEPS FOR THE OTHER THREE LEGS.

3

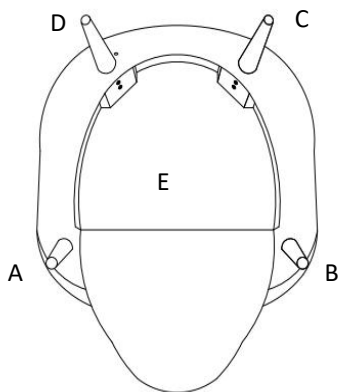

STEP 3: CLOSE THE ZIPPER ON THE BOTTOM OF THE SEAT.

4

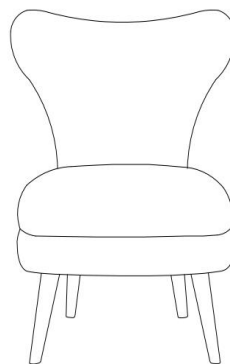

STEP 4: PUT THE CHAIR UPRIGHT AND MAKE SURE ALL LEGS ARE LEVEL, THEN FIRMLY TIGHTEN BOLTS WITH ALLEN KEY WHILE THE CHAIR IS UPRIGHT AS PICTURED ABOVE.