


OUTDOOR WALL LANTERN USE AND CARE GUIDE



ASSEMBLY INSTRUCTIONS

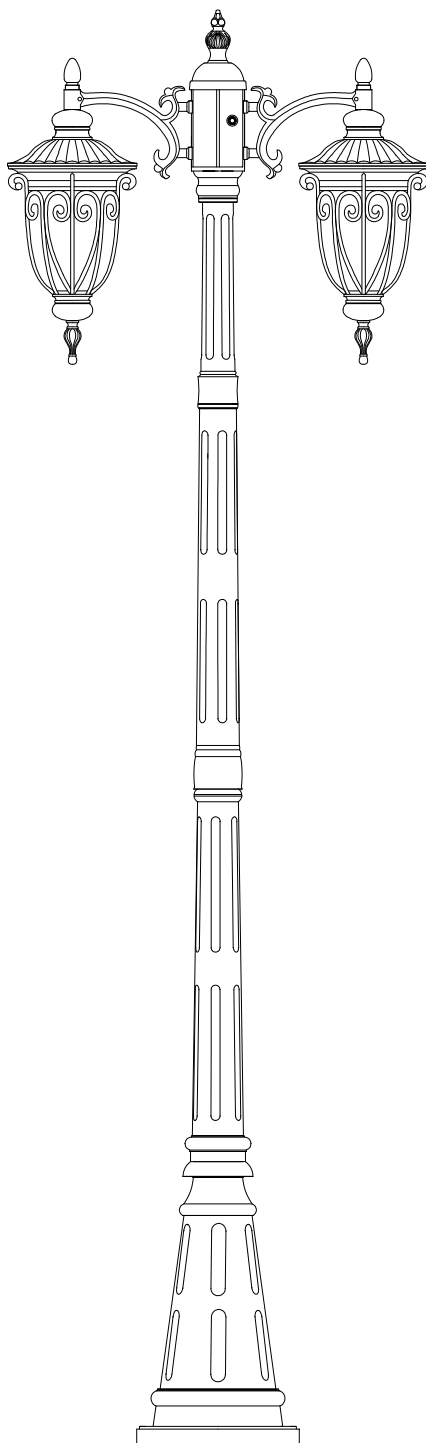

IMPORTANT SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS

INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS READ ALL INSTRUCTIONS

Before starting the installation, disconnect the Power by Turning Off the Circuit Breaker. Use the light switch and Turn Off the Power to prevent electric shock. Power to prevent electric shock. All electrical connections and installation must be following local codes, ordinances, and/or National Electric Code and Must Be Done by an Electrician Only.

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver




Wire Cutters



Safety Gloves



Ladder



Mastic Silicone
Rubber



Safety Glasses

SAFETY PRECAUTIONS:

1. Turn off electrical power before starting the installation of the post light.
2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
3. Firmly attach the post light ground wire (bare copper) to the mounting bracket with the ground screw (by wrapping around the ground screw) and then connect it to the house supply ground wire with a wire nut.
4. To clean the post light, turn off the power, wait for it to cool, and wipe the post light with a clean, soft cloth.

Note: the product may not look exactly as shown in the figures.

Product Details :

Product Name:	Dusk To Dawn Post Light
Product Dimensions:	W(24.3in) / H(82.9in)
Material:	Aluminum
Waterproof:	Weather Resistant
Glass Material:	Seed Glass
Voltage:	120VAC 60Hz
Power Source:	Hard-wired
Wattage:	Max: 100W×2
Bulb Base:	E26
Special Features:	Dusk To Dawn Sensor

Note: all specifications are for reference only and are subject to change without prior notice.


3 YEAR LIMITED WARRANTY*

This warranted against defects in material and quality for 3 year from the purchase date. This warranty does not cover acts of nature such as lighting damage or corrosion and discoloration of components. Nor does it cover damages caused through abuse, improper installation, surges in electric current, or acts of third parties.


This warranty does not cover the costs of removing and resealing the lighting fixture.

If this product falls for any reason covered by this warranty, feel free to contact us.


VIANIS THREE-HEAD POST LIGHT INSTALLATION MANUAL

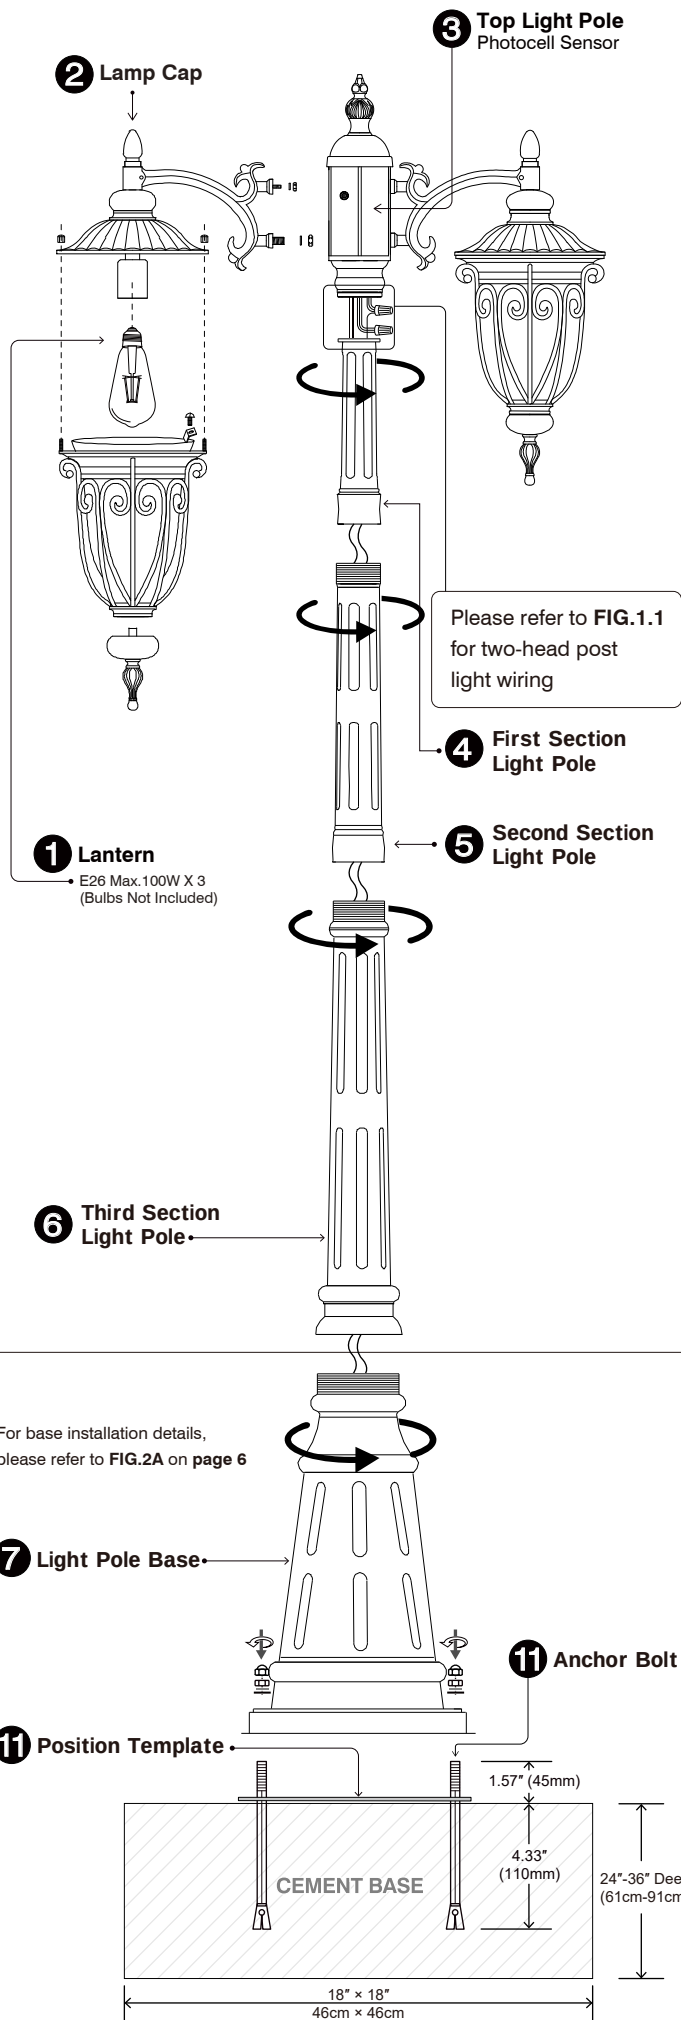


ASSEMBLY INSTRUCTIONS




Lantern × 2




Lamp Cap × 2




Top Light Pole × 1
(With Photocell Sensor)




First Section Light Pole × 1




Second Section Light Pole × 1




Third Section Light Pole × 1




Light Pole Base × 1




Long White Wire × 1




Long Black Wire × 1



Wire Nuts × 6



Anchor Bolt × 3



Position Template × 1



Installation Manual × 1


Product List

- (**1** Lantern + **2** Lamp Cap) × 3
- 3** Top Light Pole × 1 (With Photocell Sensor)
- 4** First Section Light Pole × 1
- 5** Second Section Light Pole × 1
- 6** Third Section Light Pole × 1
- 7** Light Pole Base × 1


- 8** Long White Wire × 1
- 9** Long White Wire × 1
- 10** Wire Nuts × 4
- 11** Anchor Bolt × 3
- 12** Position Template × 1
- 13** Installation Manual × 1

CONNECT TRIPLE-HEADED POST LIGHTS

Checklist Needed To Install:



Lantern
× 2



Lamp Cap
× 2




Top Light Pole
(With Photocell Sensor)
× 1



Long White Wire
× 1




Long Black Wire
× 1



Wire Nuts × 3

2 Lamp Cap

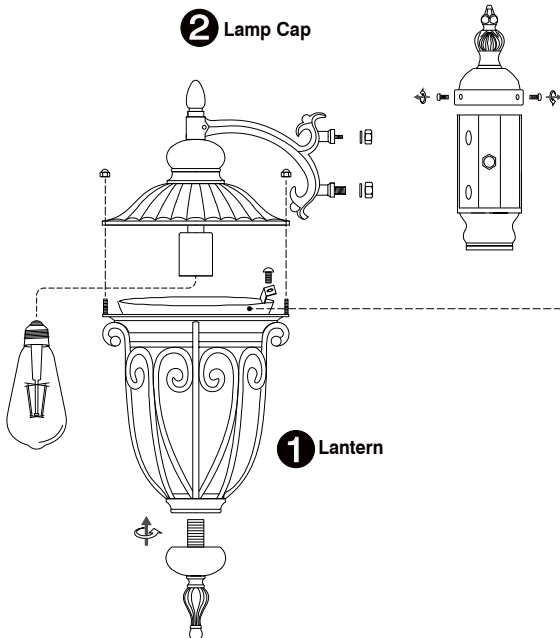

1 Lantern




Installation Safety Reminder

For your safety, please wear protective gloves during installation to prevent cuts. This product contains glass parts, so prioritizing safety is essential. Thank you for understanding and cooperating.

Disassemble The Top Light Pole

1. Connect the bottom trim to the Frame by turning.
2. Fix the glass with 3 Machine Screws.
3. Assemble the bulb: put the bulb into the lamp in order (bulb not included).
4. Fix the Top Cover to Frame with 2 Decorative Nuts.
5. Disassemble the top light pole and pull out all the built-in wires at the bottom of the top light pole.

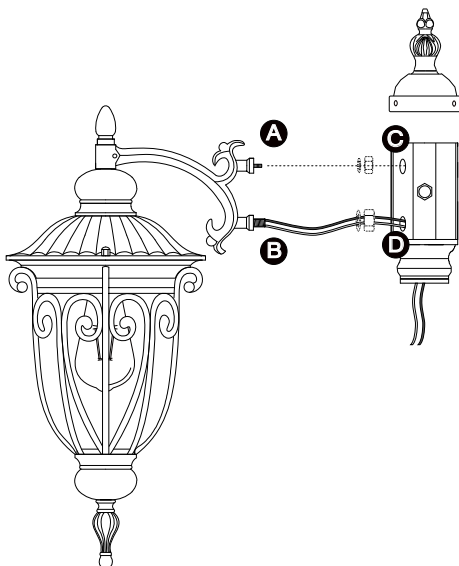


Assemble 3 Lanterns

1. Unscrew the 2 screws and 2 flat washer (A and B) at the top of the lantern arm and put the (white and black wire of the lantern arm) into the top light pole.
2. Match A to C, B to D, then tighten the screws that secure the lantern to the inside of the top light pole.

CONNECT THE TOP LIGHT POLE WIRES


FIG.1.1

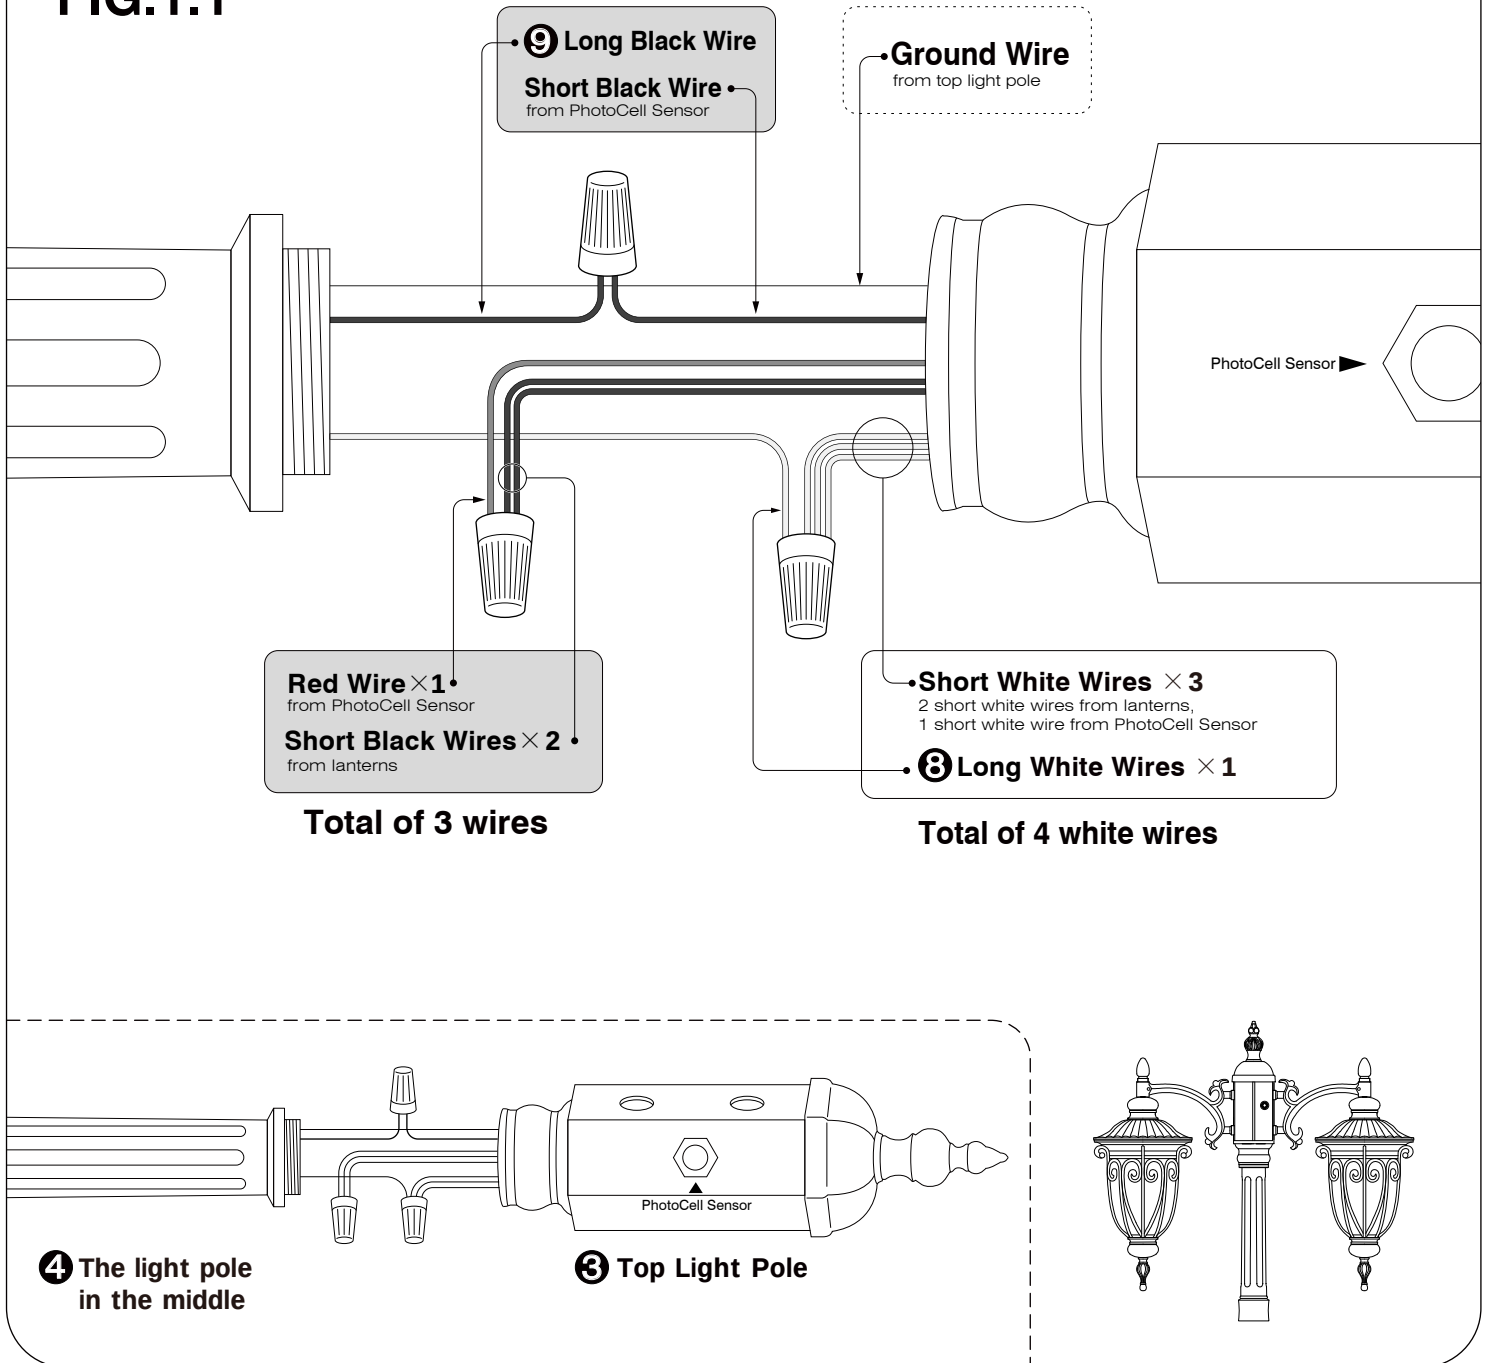

1. Mount the lamp holders onto the top rod. Next, carefully route all the wires, ensuring they are brought out from the bottom section.
2. Connect the "Long Black Wire" and the "Short Black Wire" together with a wire nut.
from PhotoCell Sensor
3. Connect the "Red Wire × 1" and "Short Black Wires × 2" together using a wire nut.
from PhotoCell Sensor from lanterns
4. Connect the "Short White Wires × 3" and the one "Long White Wire × 1" provided by using a wire nut.
2 short white wires from lanterns, 1 short white wire from PhotoCell
5. Assemble all the light poles in sequential order and route all the long wires (black wire, white wire, ground copper wire) from the base (Next Page FIG.1.2)


CONNECT LIGHT POLE

Checklist Needed To Install:



Top Light Pole × 1
(With Photocell Sensor)

4




First Section Light Pole × 1

5




Second Section Light Pole × 1

6




Third Section Light Pole × 1

7




Light Pole Base × 1

10



Wire Nuts × 3

Connect The Light Poles In Turn

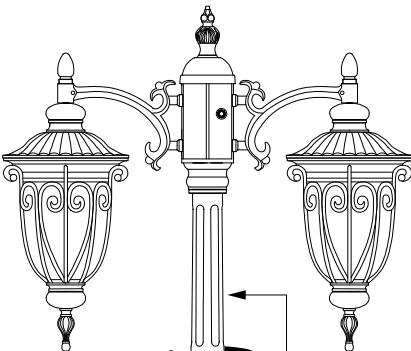

4 First Section Light Pole


5 Second Section Light Pole

6 Third Section Light Pole

7 Light Pole Base

FIG.1.2

Connecting The Power Supply

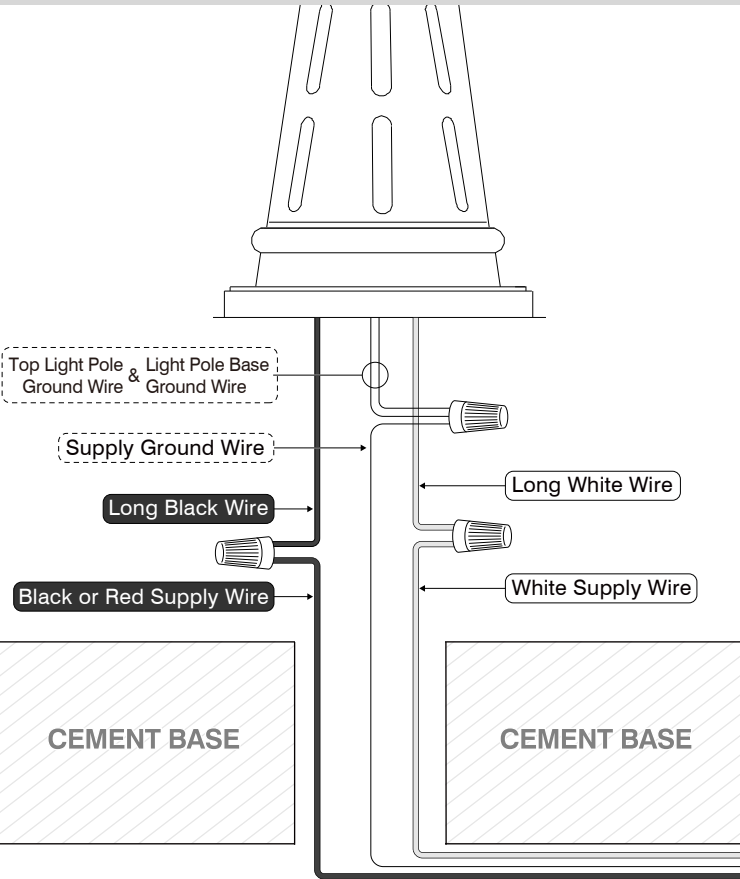

Connect wires according to the below chart

Connect Black or Red Supply Wire to:	Connect White Supply Wire:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear,Brown,Gold or Black without tracer	Clear,Brown,Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires are used. The neutral wire is square shapac or ridged and the other wire will be round in shape or smooth.

STEPS TO INSTALL THE LIGHT POLE BASE

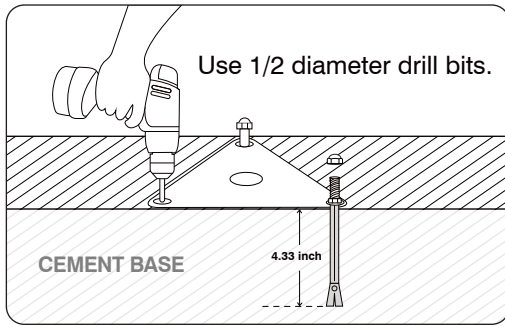


FIG.1

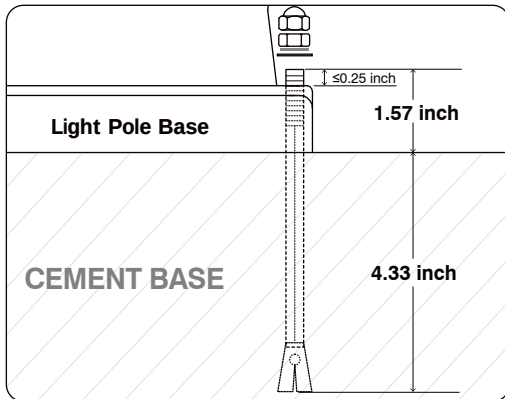


FIG.2


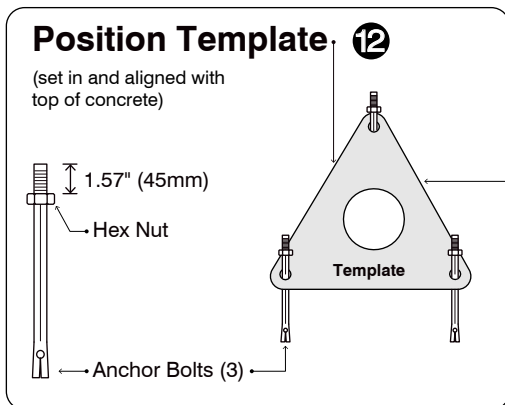


FIG.3

FIG.2A

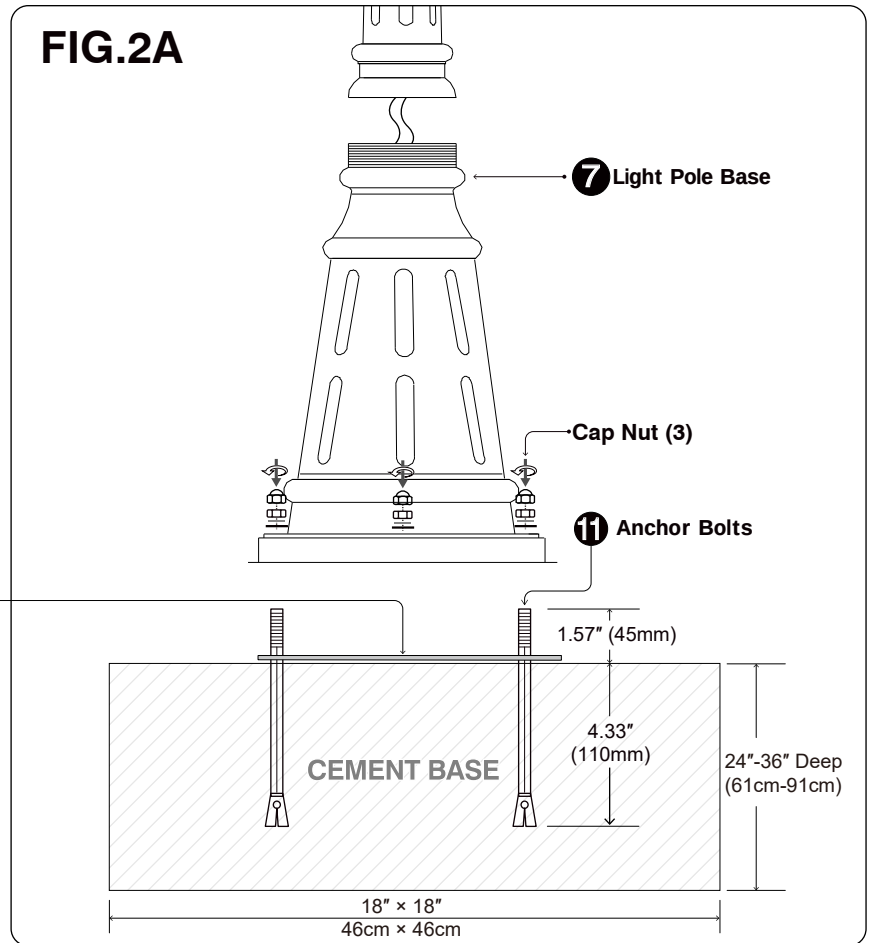

1. Drilling holes in the concrete floor using an electric drill (**the specific position can be fixed with the 12 Position Template**), the drill depth is about 4.33" (110mm). (FIG.1)
2. Install the expansion screws into the corresponding holes, leaving about 1.57" (45mm). (FIG.2)
3. Install the base in the corresponding hole of the expansion screw. (FIG.3)
4. Finished after the screw is tightened.

Installation Steps:

1. Attach all three (3) **Anchor Bolts** to the **Position Pemplate**. Place the **Hex Nuts** over the **Position Template** to secure it in place. The threaded portion of the **Anchor Bolts** should extend 1.57" (45mm) from the position template, as illustrated in FIG.3. After the **Anchor Bolts** and **Position Template** are embedded and fixed in the **CEMENT BASE**, remove the **Hex Nut**.
2. The **CEMENT BASE** should have a minimum width of 18" (46cm) and a depth of 24 inch-36 inch (61-91cm), depending on the frost line in your area. Ensure that the **Anchor Bolts** protrude 1.57" (45mm) from the cement surface. as illustrated in FIG.2A.
3. Once the cement has fully dried, position the **Light Pole Base** onto the **Anchor Bolts** and thread the electrical wire through the designated hole.
4. Secure the light pole base to the concrete by tightening three (3) **Cap Nuts** onto the **Anchor Bolts**, as illustrated in FIG.2A.
5. Please note that after the **Light Pole Base** is placed in the **CEMENT BASE**, the height from the **Anchor Bolts** to the **Light Pole Base** should not exceed 0.25" (6.5mm) , as illustrated in FIG.2.