
SINGLE DOOR WALL CABINET



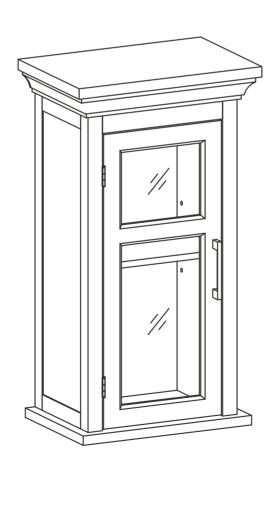

FOR REPLACEMENT PARTS OR HELP WITH ASSEMBLY PLEASE CONTACT US PLEASE ENSURE TO HAVE THE MODEL # FROM THE PACKAGING OR INSTRUCTION BOOKLET

TO RETURN THE PRODUCT: PLEASE CONTACT THE RETAILER WHERE THE ITEM WAS PURCHASED FROM

IMPORTANT : Please read this manual carefully before beginning assembly of this product. Keep this manual for future reference.

SAFETY INFORMATION

Identify all the parts and hardware. Do not discard of the packaging until you have checked that you have all of the parts and hardware required. Hardware package may have spare parts.

WARNING: This item contains small parts which can be swallowed by children and pets. Keep children and pets away during assembly. To avoid danger of suffocation, always keep plastic bags away from children and pets. We recommend that you assemble this unit on a carpeted floor to avoid scratches. If using power tools, set the tool to low torque to avoid damage.

May require 2 people for ease of assembly.


CARE and MAINTENANCE

To clean, use a soft or slightly damp cloth, then wipe with a clean, dry cloth. Dust with soft dry cloth.


Do not use ammonia-based cleaning products, as they will damage the finish. Do not leave liquids or damp cloths on this furniture.

To avoid dulling of the finish, do not place furniture in direct sunlight.


Please inspect and tighten all screws or bolts on a regular basis to ensure proper performance and safety of your item.

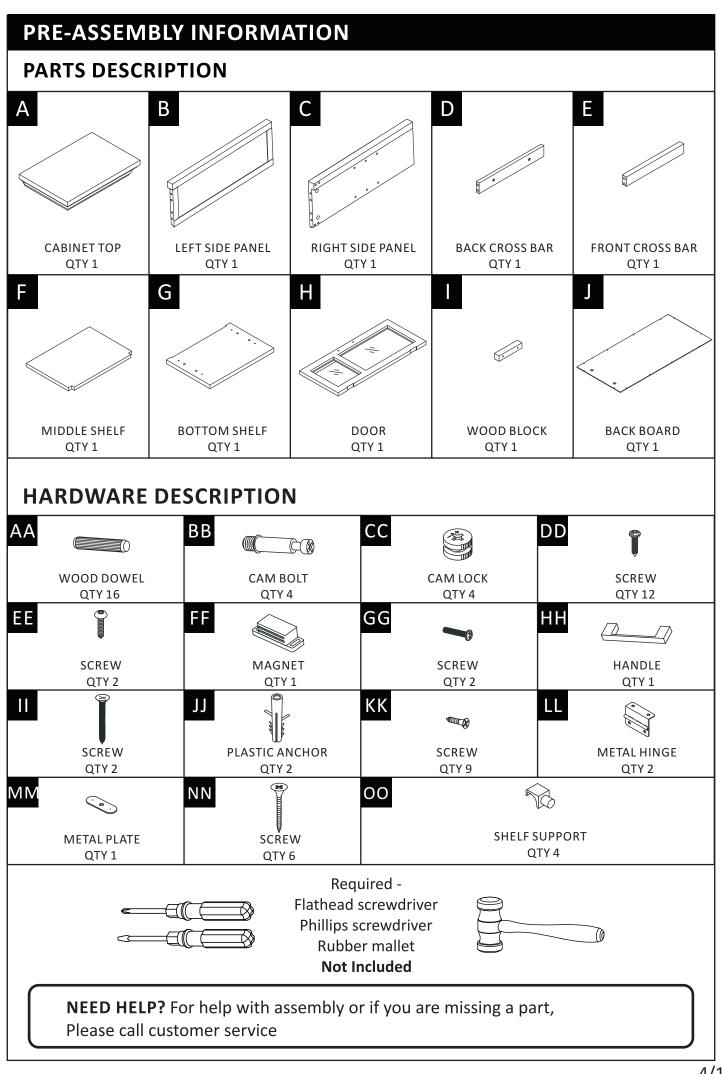

4/11

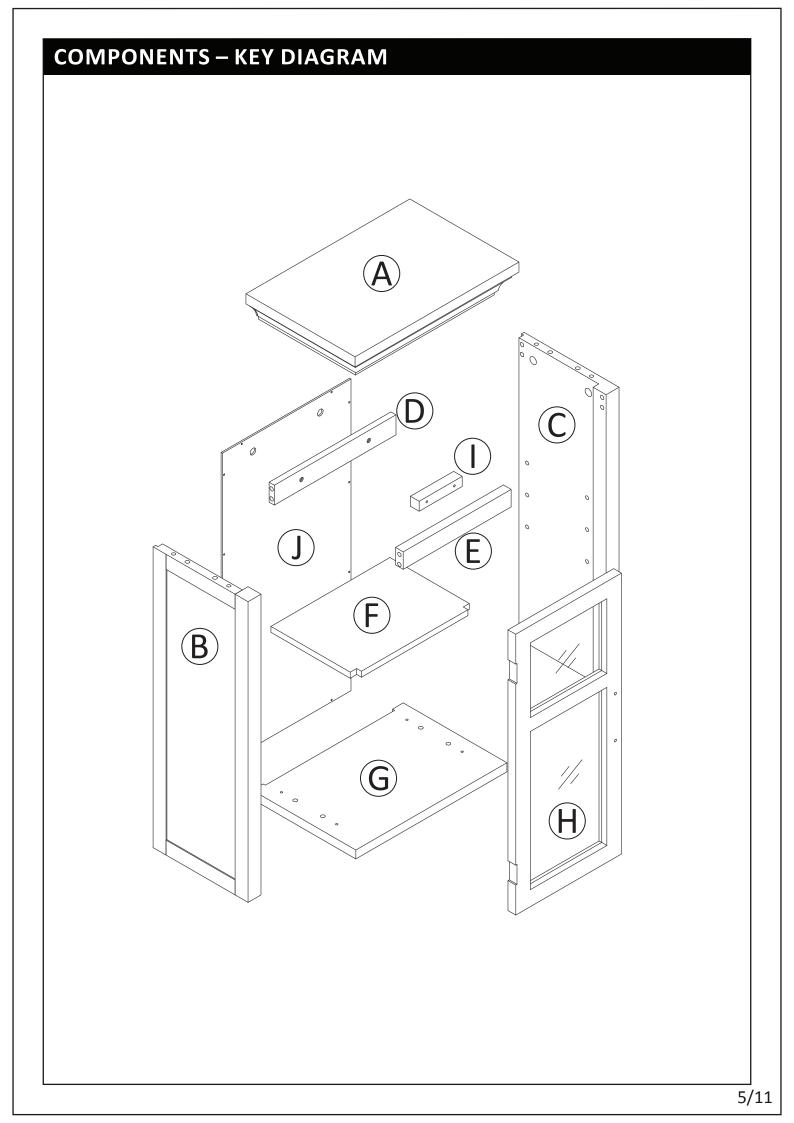


STEP 1

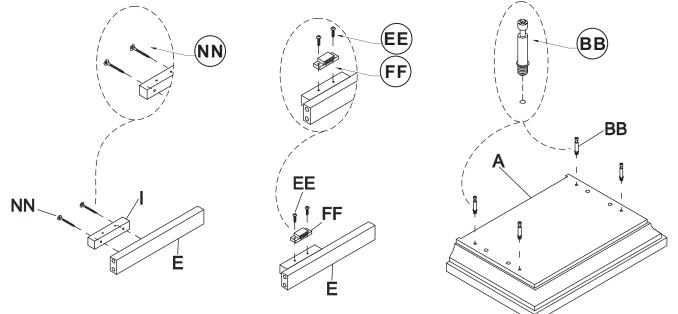

Assembling the Cabinet Top

- 1. Lay down the cabinet top (A) and screw four cam bolts (BB) into the pre-drilled holes using a Phillips screwdriver.
- 2. Attach the wood block (I) to the front cross bar (E) by inserting two screws (NN) through holes on the wood block (I) and tighten to front cross bar (E) using a Phillips screwdriver.
- 3. Insert two screws (EE) through the holes on magnet (FF) and tighten to the top of the wood block (I) using a Phillips screwdriver.


STEP 2

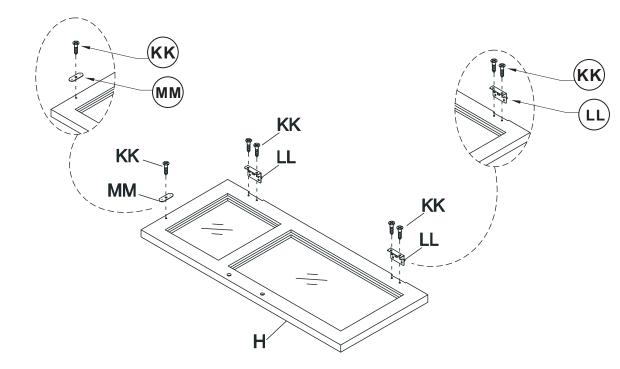

Assembling the Door


- 1. Lay down the door (H) and attach two metal hinges (LL) to the door (H) by inserting four screws (KK) through the holes on the metal hinges (LL). Tighten to the door (H) using a Phillips screwdriver.
- 2. Attach the magnet plate (MM) to the door (H) by inserting one screw (KK) through the hole on the magnet plate (MM) and secure to door (H) using a Phillips screwdriver.

STEP 3

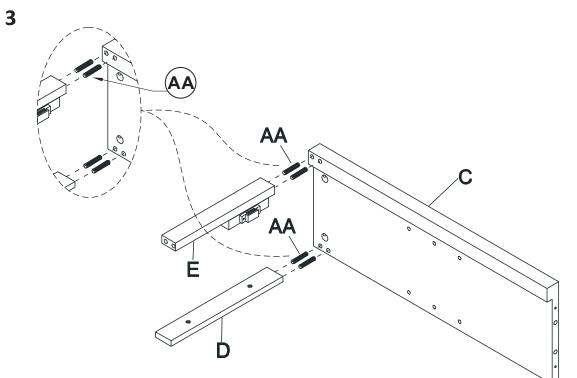


Assembling the Back Cross Bar and Front Cross Bar

1. Attach the back cross bar (D) and front cross bar (E) to the right side panel (C) by inserting the wood dowels (AA) into the dowel holes on the right side panel (C).

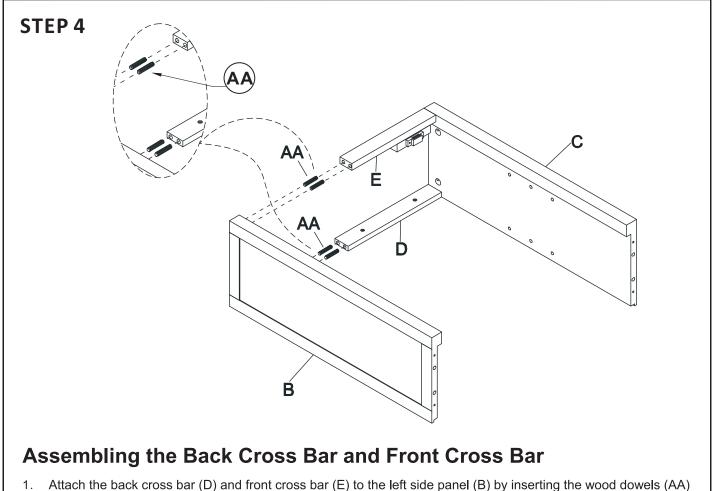


into the dowel holes on the left side panel (B).

STEP 5

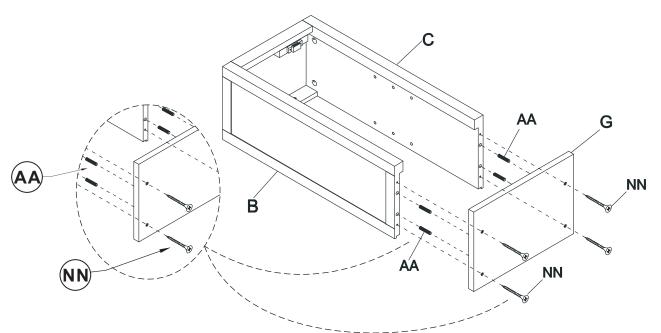


Assembling the Bottom Shelf

- 1. Attach the bottom shelf (G) to both pre-assembled side panels (B) and (C) by inserting four wood dowels (AA) into the dowel holes on both side panels (B) and (C).
- 2. Insert four screws (NN) through the holes on the bottom shelf (G) and tighten to both side panels (B and (C) using a Phillips screwdriver.

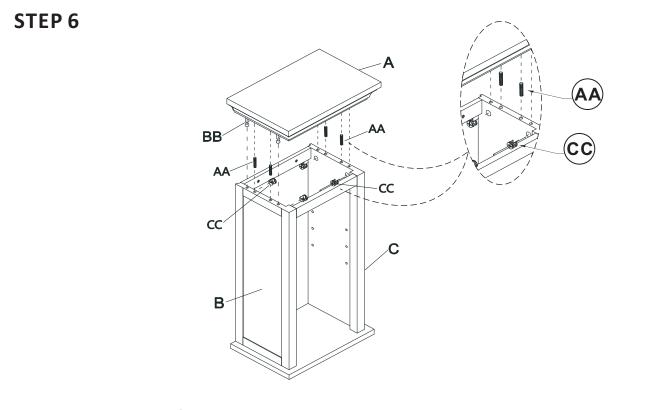


Assembling the Cabinet Top

- 1. Attach the cabinet top (A) to both pre-assembled side panels (B) and (C) by inserting four wood dowels (AA) into the dowel holes on both side panels (B) and (C).
- 2. Insert four cam locks (CC) into the cam lock holes on both side panels (B) and (C). Rotate clockwise to secure the cam bolts (BB) in place using a Phillips screwdriver.

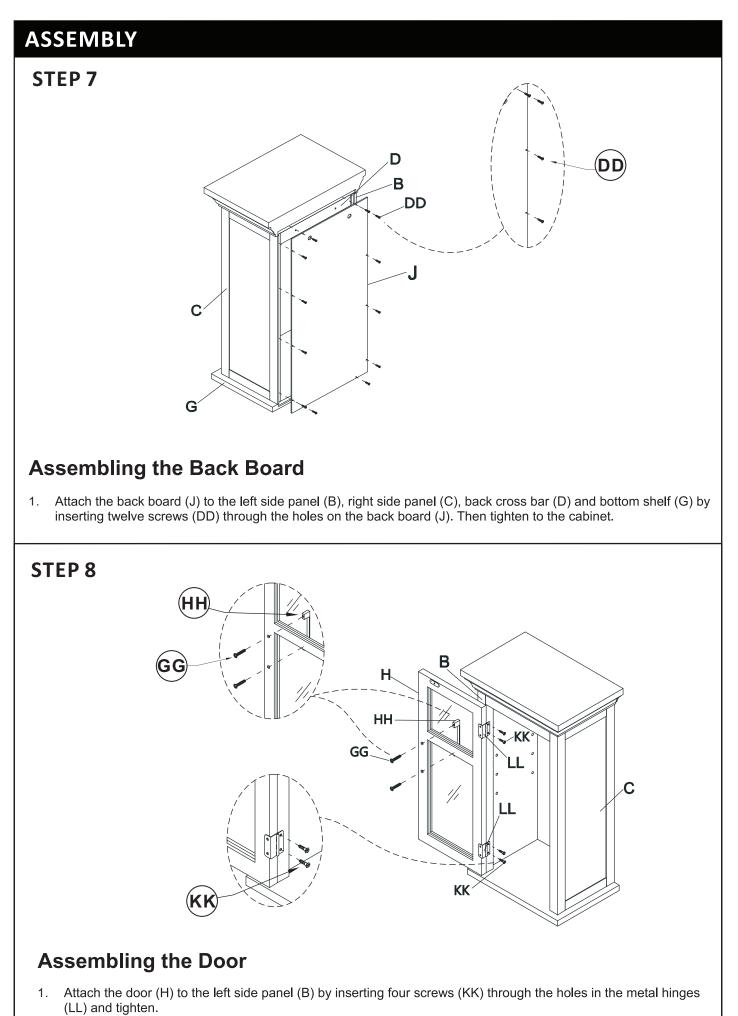


2. Attach the handle (HH) to the door (H) by inserting two screws (GG) through the holes on the door (H), then tighten to handle (HH) using a Phillips screwdriver.

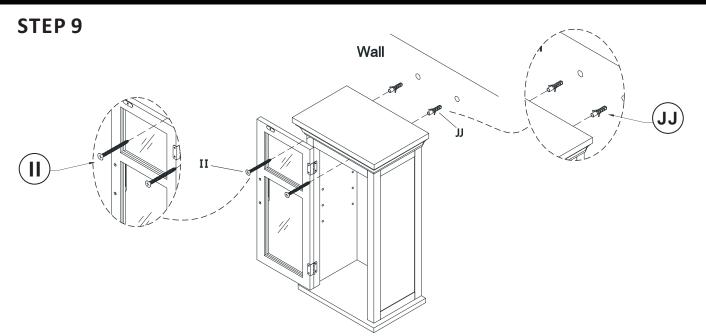

Assembling to the Wall (requires 2 people)

- 1. Place cabinet in a desired location against a wall.
- 2. Using a level, mark two holes on the wall through the holes of the inside of the cabinet.
- 3. Drill two holes in the wall where marked.
- 4. Insert two plastic anchors (JJ) into the holes.
- 5. Align the holes in the cabinet with the holes in the wall, then insert two screws (II) through the holes on the back of cabinet into the plastic anchors (JJ) and tighten the cabinet to the wall.

STEP 10

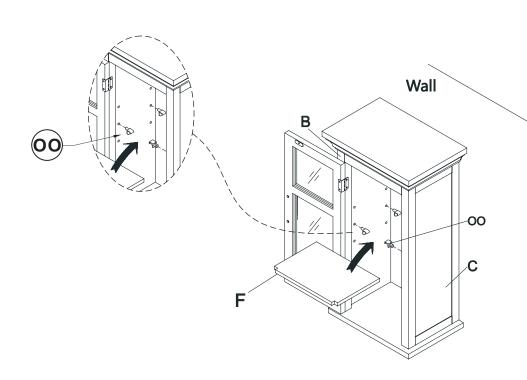

Assembling the Shelf

1. Insert four shelf supports (OO) into the holes in the cabinet on both side panels (B) and (C) at the same level.

2. Insert the middle shelf (F) into the cabinet on top of the shelf supports (OO).

WARRANTY

Thank you for purchasing a product. These products have been made to demanding, high-quality standards and are guaranteed for domestic use against manufacturing faults for a period of 12 months from the date of purchase. This warranty does not affect your statutory rights.

In case of any malfunction of your product (failure, missing parts, etc.) please contact us at our toll free service line or by email

We reserve the right to repair or replace the defective product, at its discretion.

This product is guaranteed for 12 months if used for normal purposes. Any warranty is invalid if the product has been overloaded or subject to neglect, improper use or an attempted repair by other than an authorized agent. Heavy-duty or daily professional/commercial usage are not guaranteed.

Due to continuous product improvement, we reserve the right to change the product specifications without prior notice.