



ITEM #: RVY-CP3862-4

IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.
Note: Some types of fuses must be unscrewed to shut the power off.
- If you are unclear as to how to proceed, please consult a licensed electrician.

UNPACK THE FIXTURE: Check the contents of the box. Box should contain all items on the parts diagram.



For any replacement parts or installation issues, please Contact Us!

Email: help@kira-home.com

Facebook/Instagram: @KiraHomeDecor

Phone: 888.208.2085

Need help with installation?

Check out our install Video!

Visit: <https://bit.ly/39VEvlz>




ASSEMBLY INSTRUCTIONS


1. Spread Arms (M) on Fixture Body (J) to create the chandelier design.

2. Weave Large Ring (N) through from the bottom of Socket Assembly (P) and Column (Q), and rest it on the notches within the top of Fixture Body (J).

3. Weave Small Ring (O) through from the bottom of Socket Assembly (P) and Column (Q), and rest it on the notches within the bottom of Fixture Body (J).

Note: Socket Assembly (P) and Column (Q) should be sitting within Fixture Body (J).

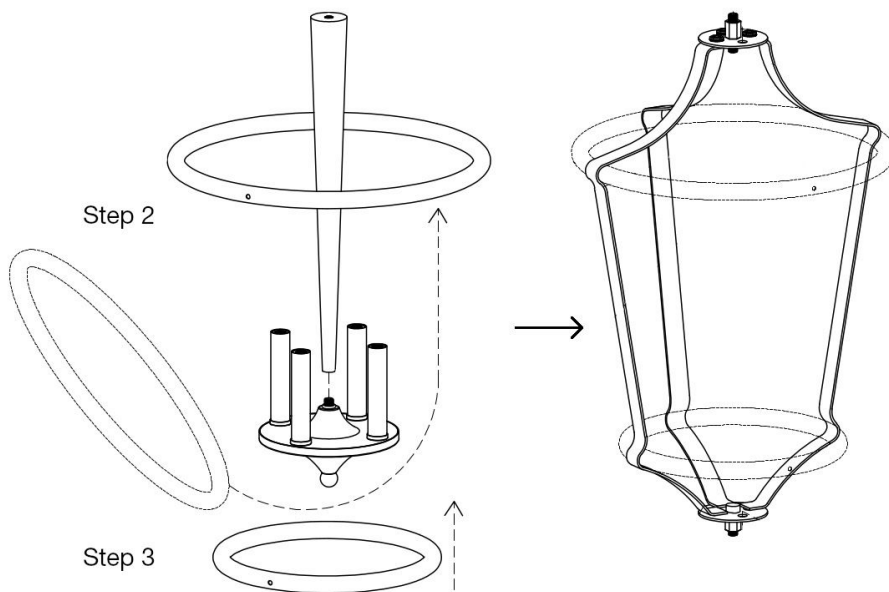

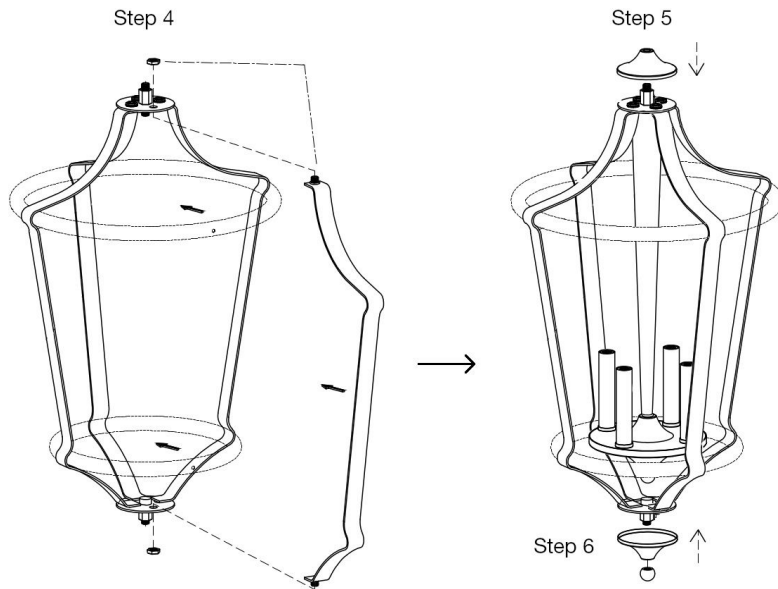


4. Secure detached Arm (M) to the top and bottom connectors on Fixture Body (J) with Hex Nuts (T).

5. Secure Column (Q) to Socket Assembly (P) and the top of Fixture Body (J) to Column (Q). Pull through any necessary Wire (H).

6. Place Top Cap (K) over the top connector on Fixture Body (J) and secure in place with Pendant Loop (I). Place Bottom Cap (R) over the bottom connector on Fixture Body (J) and secure in place with Finial (S).

INSTALLATION INSTRUCTIONS

1. Secure Mounting Plate (A) to the junction box (not included) using Mounting Screws (B) provided. Ensure the attached Screw Collar Loop (E) is pointing down towards the floor.
2. Remove Threaded Ring (F) from Screw Collar Loop (E) by unscrewing it in a counter-clockwise direction. Set Threaded Ring (F) aside.
3. Place Canopy (D) against the ceiling with Screw Collar Loop (E) protruding through the hole in Canopy (D). Adjust Screw Collar Loop (E) and the hex nut above it until 3/8" of the threaded portion of Screw Collar Loop (E) is visible. Remove Canopy (D) and set it aside.
4. Assemble one end of Chain (G) to Pendant Loop (I) by opening Quick Link (L) closing it around Pendant Loop (I).
5. With chain pliers, remove excess Chain (G) to achieve hanging length. Once Chain (G) is to desired length, use wire cutters to cut Wire (H) 10" beyond the length of Chain (G) to allow for easier wire connection.
6. Weave Wire (H) upwards through every 4-5 links in Chain (G).
7. Slide Threaded Ring (F) down Chain (G) and Wire (H) with the raised end (flange) facing up towards the ceiling. Slide Canopy (D) down Chain (G) and Wire (H).
Note: Threaded Ring (F) and Canopy (D) will be used to secure the fixture to the ceiling later.
8. Carefully lift the fixture. Secure top of Chain (G) to Screw Collar Loop (E) with Quick Link (L).
9. Insert the end of Wire (H) through the hole in Screw Collar Loop (E) into the junction box.
10. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

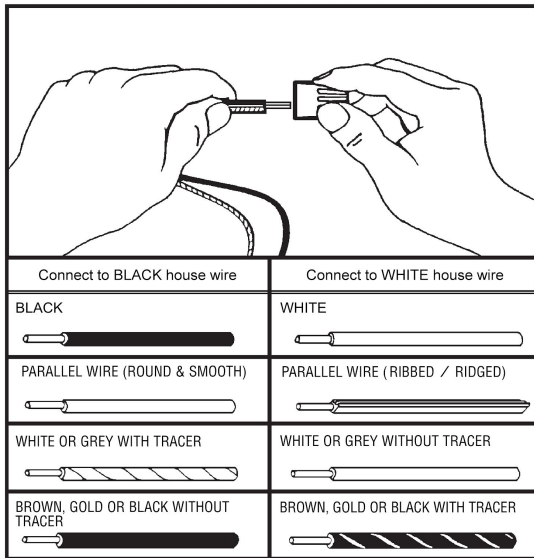

- A.** Connect the ground wire (bare copper or green) from your fixture to the:
- 1) ground wire in the junction box, or
 - 2) ground screw in the junction box
- B.** Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
- C.** Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

- 11.** Place all Wires (H) and Wire Connectors (C) back into the junction box.
- 12.** Slide Canopy (D) and Threaded Ring (F) up Chain (G) and Wire (H). Place Canopy (D) flush against the ceiling and secure in place by screwing Threaded Ring (F) onto Screw Collar Loop (E) in a clockwise direction.
- 13.** Install bulbs (not included) into the sockets.

Enjoy your new fixture!

ITEM #: RVY-CP3862-4 - PARTS DIAGRAM

HELPFUL TOOLS: Safety Goggles, Screwdriver, Wire Cutter/Stripper, Ladder, Measuring Tape, Chain Pliers

