



Sifton™ Water-Guard® | K-4460-C

Wall-mount 3.5 gpf flushometer valve elongated blow-out toilet bowl with rear inlet, requires seat

Features

- Elongated bowl offers added room and comfort
- Blow-out
- 1-1/2" (38 mm) rear spud
- 3.5 gpf (13.2 lpf)
- 14-1/2" (368 mm) x 11-3/8" (289 mm) water area



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 21:20 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Accessibility standards may require controls to be located on the open side of the toilet.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

ADA CSA B651 OBC

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
ADA
ICC/ANSI A117.1
CSA B651
OBC

Recommended Products/Accessories

K-4670-C Elongated toilet seat with check hinge

K-4670-CA Commercial elongated toilet seat with antimicrobial agent and check hinge

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

Technical Information

Installation Type:	Wall-hung
Rough-in:	11"
Flush Rate:	3.5 gpf (13.2 lpf)
Bowl Shape:	Elongated
Seat-Mounting Holes:	5-1/2" (140 mm)
Waste Outlet:	Wall
Trapway Size:	2-5/8" (67 mm)
Trapway Type:	Concealed
Water Surface Size:	14-3/8" x 11-1/4" (365 mm x 286 mm)
Rim to Water Surface:	5-3/8" (137 mm)


Pressure/Fixture Supply Requirements

Minimum Flowing Pressure:	35 psi (241.3 kPa)
Minimum Flow Rate:	35 gpm (132.5 l/min)

Material

- Vitreous china



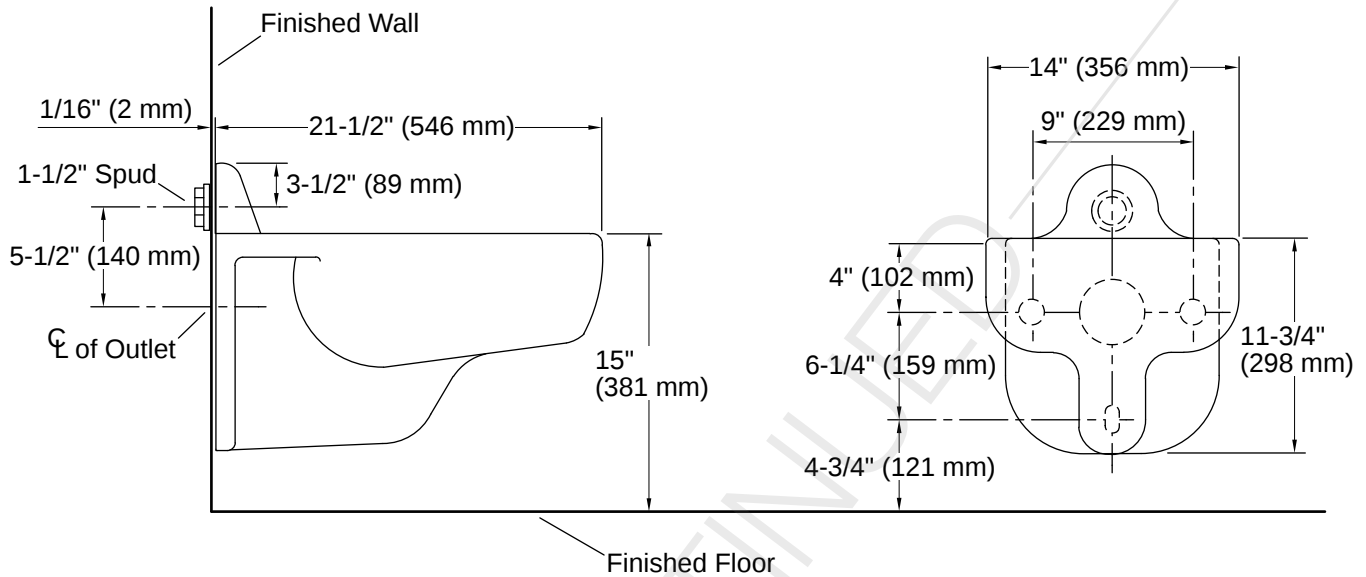

Installation

- Wall-mount
- This product is not designed or intended for bariatric use

Installation Notes

Install this product according to the installation instructions.

Refer to manufacturer and local codes for flush valve requirements.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-29-2026 21:20 - US-CA