

# Installing the Sloped Ceiling Kit (SCK52\*\*) Instructions Sheet

**Be sure the electricity to the fan is turned off!**

## INSTALLATION NOTE

*When installing your ceiling fan on a sloped ceiling, the hanger bracket must be mounted with the opening parallel to the slope (Figure 2a).*

1. Remove the Hanger Ball by loosening the setscrew in the Hanger Ball until the ball falls freely down the Downrod. (Figure 1a) Remove the Pin from the Downrod, then remove the Hanger Ball. Retain the Pin for reinstallation in Step 3.
2. Route wires through opening in Canopy. Position Canopy on fan shown with open side facing up. (Figure 1b)
3. Reinstall the Hanger Ball (Figure 1b) on the Downrod as follows. Route the three 80" wires through the Hanger Ball. Position the Pin through the two holes in the Downrod and align the Hanger Ball so the Pin is captured in the groove in the top of the Hanger Ball. Pull the Hanger Ball up tight against the pin. **Securely tighten the setscrew in the Hanger Ball. A loose setscrew could create fan wobble.**
4. Carefully lift the assembled fan and seat the downrod/hanger ball assembly on the Hanger Bracket that was attached to the ceiling joist. Be sure the groove in the ball is lined up with tab on the hanger bracket (Figure 2a).

## ⚠ WARNING



Failure to seat tab in groove could cause damage to electrical wires and possible shock or fire hazard.

**NOTE:** The threaded rods in the hanger bracket serves as guides for easier (Canopy Housing) installation.

5. Securely attach the Canopy Housing to the Hanger Bracket using the two threaded rods, external lockwashers and knurled knobs supplied with your kit (Figures 2b).

## ⚠ WARNING

To avoid possible fire or shock, make sure that the electrical wires are completely inside the canopy housing and not pinched between the bracket, the housing and/or the ceiling.

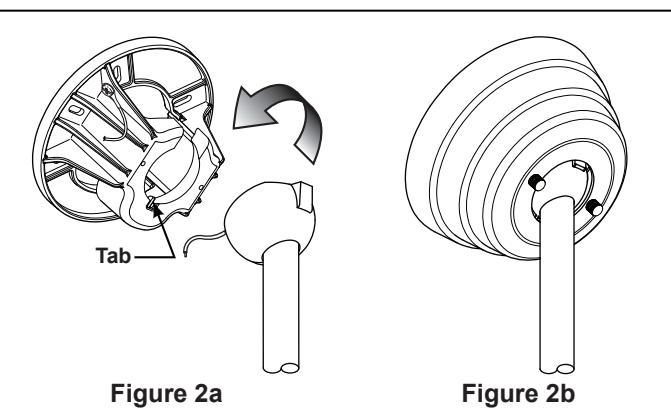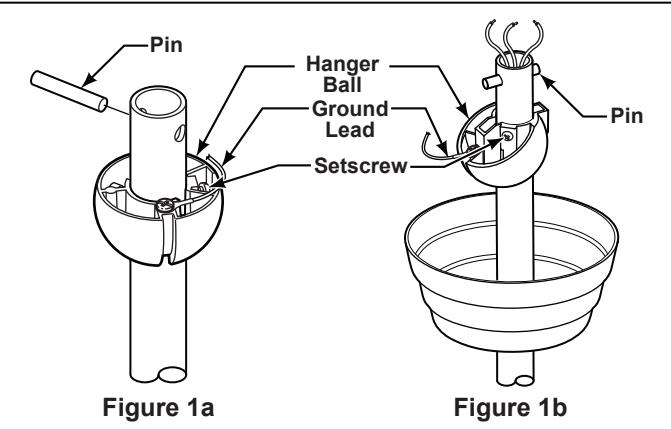

## SCK52\*\* – Sloped Ceiling Kit Parts List

Description	Part #
Hanger Bracket	APG510BL
Ceiling Canopy	PG160**
Hanger Ball	PG145
5/32" x 1" Threaded Rods (2)	
5/32" External Lockwashers (2)	
Knurled Knobs (2)	

*\*\*Insert FINISH CODES (Refer to fan model number located on downrod support)*



10983 Bennett Parkway  
Zionsville, IN 46077  
(888) 567-2055  
FAX (866) 482-5215

Visit Our Website @ [www.fanimation.com](http://www.fanimation.com)