


Items Required For Assembly

Submersible Pump	(provided)
Vinyl Tubing	(provided)
Rubber Stopper	(provided)
Silicone Sealer	(provided)

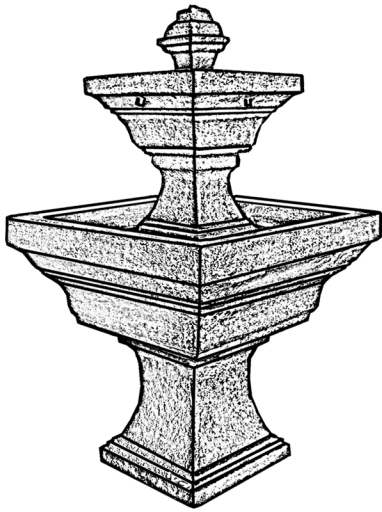

- 1) Place base (A) on a firm, level surface. Lift up one side of the base approximately 3" by placing some wood under the base where the groove is located.
- 2) Place bowl (B) onto the base (A).
- 3) Place pump in the bottom of bowl (B). Pass the electrical cord through the PVC coupling at the bottom of the bowl, through the base, and out the bottom of the base where the groove is located.
- 4) Remove the wood holding up the base (A) and gently lower the base to the ground.
- 5) Pull the electrical cord out the bottom of the base so that approximately 6" remains inside the bowl (B).
- 6) Take the rubber stopper and apply silicone sealer in the center hole. Open the stopper and place around the electrical cord. Apply silicone sealer around the outside and along the inner cut of the stopper and insert fully into the PVC coupling at the bottom of the bowl.

- 7) Pour a small amount of water into the bowl (B) so that the rubber stopper is submerged. Check to make sure that the water is not leaking through the rubber plug. If you find water is leaking, remove the rubber plug, and return to step 6.
- 8) Place the pumphouse (C) over the pump.
- 9) Slip one end the vinyl tubing onto the hose barb protruding from the bottom of the small bowl (E).
- 10) Place the top bowl (E) onto the pumphouse (C) so that the vinyl tubing protruding from the bottom of the top bowl extends through the pumphouse to the pump.
- 11) Through the access cutout, attach the vinyl tubing to the outlet of the pump. Make sure that the tubing is not kinked so as to restrict water flow. You may cut the vinyl tubing if necessary.
- 12) Place the finial (F) into the top bowl so that the hole at the bottom of the finial is aligned with the water outlet at the bottom of the top bowl (E).
- 13) Fill the bowl (B) with water so that the pump is completely submerged.
- 14) Plug the pump into a GFCI protected outlet.
- 15) Adjust the water flow of the pump if necessary using the flow control dial on the pump.
- 16) Place the access door (D) into the access cutout of the pumphouse (C) and enjoy your new fountain.

