

VANITY LIGHT FIXTURE **INSTALLATION INSTRUCTIONS**

Please read carefully and save these instructions, as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

- 1, Drill the Anchor into the wall, thread the Tapping Screw to the Cross bar, then screw the Hex nut on the Screw-1.
- 2, Attach the Cross Bar to the Outlet Box by 2 pcs Mounting Screws-2
- 3, Make wire connections:
 - Twist together the white wire from the fixture with the white wire from outlet box. Cover with wire connector
 - Twist together the black wire from the fixture with the black wire from outlet box. Cover with wire connector
 - Attach the ground wire to the cross bar with a green ground screw. Carefully tuck wire back into the OUTLET BOX
- 4, Place the Back plate against the Outlet box, secure with the Ball nut
- 5, Put the Shade onto the Socket and screw with the Ring.
6. Install bulbs: (Bulbs not including in the package)
(Please don't exceed the maximum capacity that recommended on the Sockets)

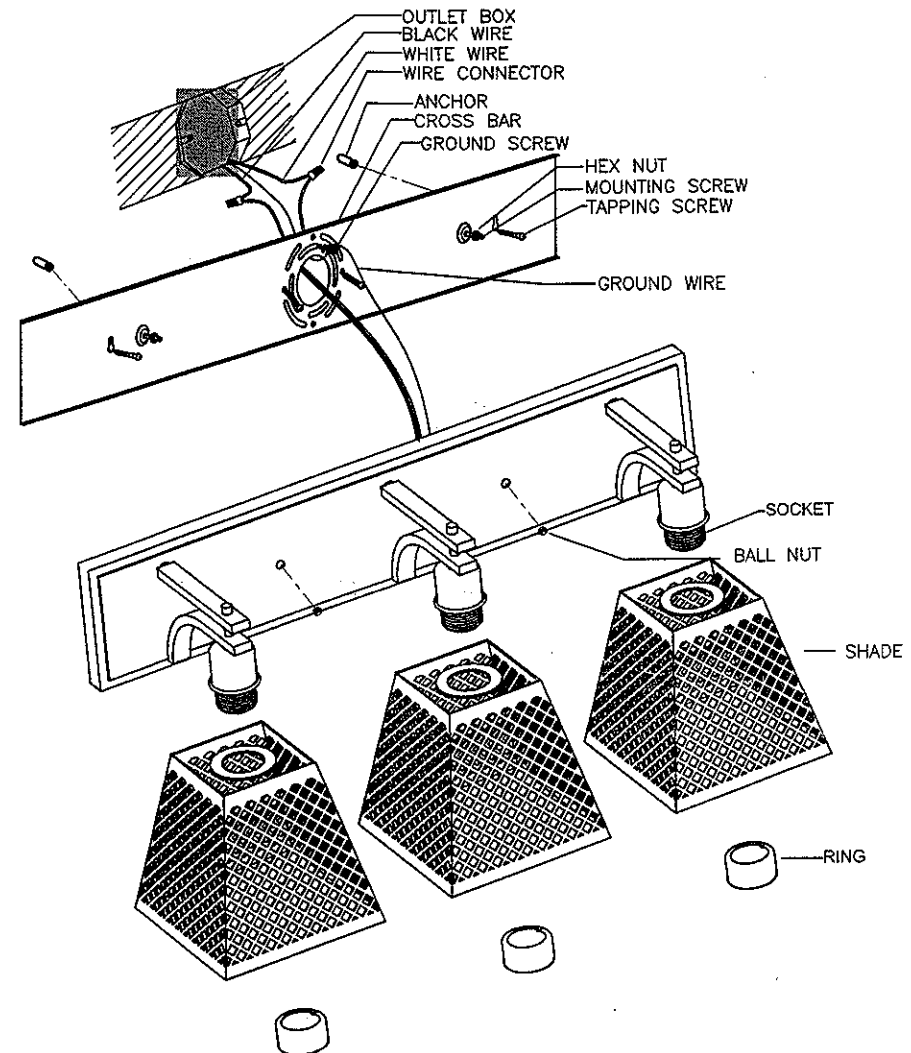

INSTALLATION IS NOW COMPLETED.