

Features


- Vikrell®
- Optional K-1278 removable apron
- With slip resistance
- 60" (152.4 cm) x 42" (106.7 cm) x 20" (50.8 cm)

5' (1.5 m) BATH
K-1227

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- CSA B45
- ASTM E162
- ASTM E662
- State of Massachusetts

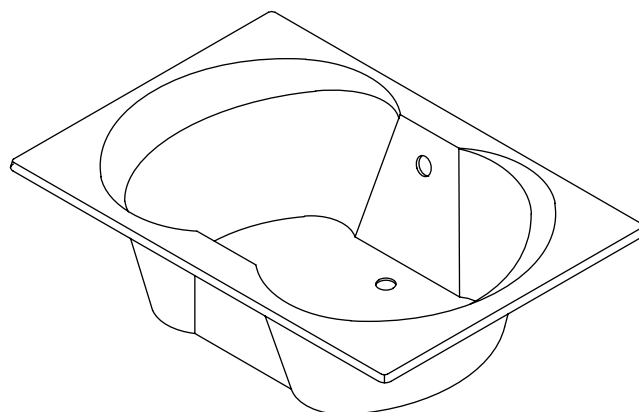

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1227	5' (1.5 m) bath	☐ 0	☐ Other_____	
Required Accessories				
K-7161-AF	Clearflo pop-up bath drain	☐ CP	☐ PB	☐ Other_____
Optional Accessories				
K-1278	Removable apron	☐ 0	☐ Other_____	

Product Specification

The Vikrell bath shall be 60" (152.4 cm) in length, 42" (106.7 cm) in width, and 20" (50.8 cm) in height. Product shall feature an optional K-1278 removable apron. Bath shall be slip resistant. Bath shall be Kohler Model K-1227-_____.

OVERTURE®

Technical Information

Fixture*:	
Bathing well	
Basin area, top	54" (137.2 cm) x 37" (94 cm)
Basin area, bottom	37" (94 cm) x 26" (66 cm)
Weight	57 lbs (25.9 kg)
To overflow	
Water depth	14-1/4" (36.2 cm)
Capacity	69 gal (261.2 L)
* Approximate measurements for comparison only.	
Drop-in cut-out	58-1/2 (148.6 cm) x 40-1/2" (102.9 cm)

Installation Notes


Install this product according to the installation guide.

Floor support under the bath must provide for a minimum of 37 lbs/square foot (179 kg/square meter) loading.

NOTICE: This bath is designed for drop-in installation only. It is not suited for use in three-wall alcove with an overhead shower.



If installing a rim-mount faucet, make sure there is no interference with the drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

The optional apron must be installed before the finished floor and wall materials are installed.

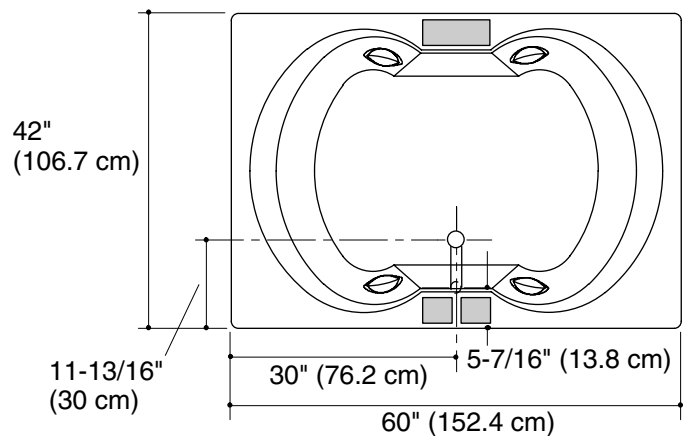

No change in measurements if connected with drain illustrated. (K-7161-AF)

Recommended faucet area

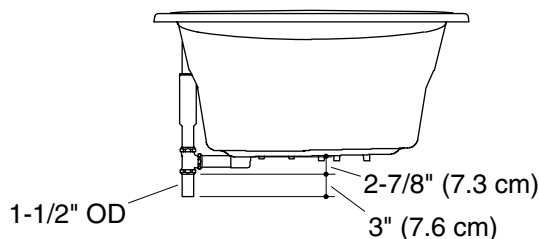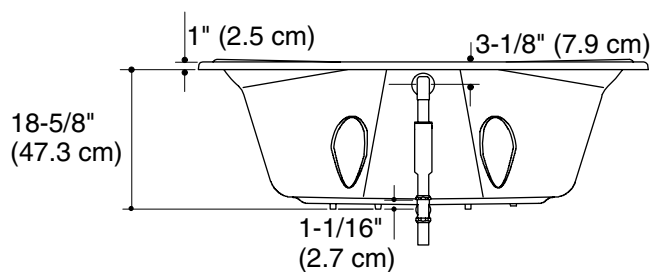

Product Diagram