


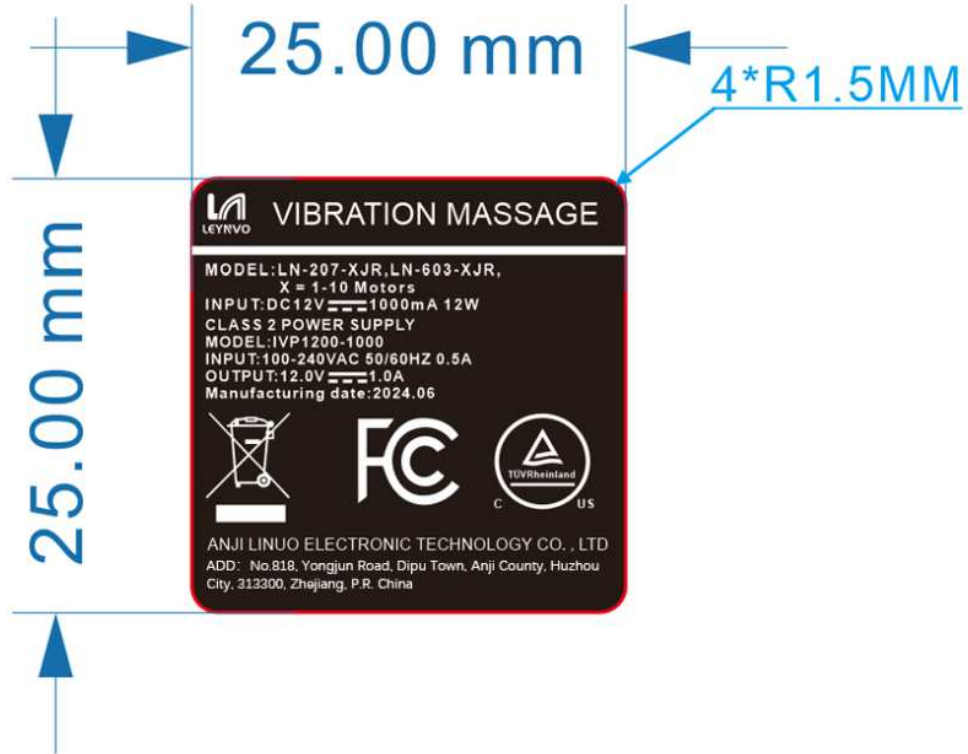


Produkte
Products

Prüfbericht - Nr.: <i>Test Report No.:</i>	CN24KRS7 001	Seite 1 von 109 <i>Page 1 of 109</i>
Auftraggeber: <i>Client:</i>	Anji Linuo Electronic Technology Co.,LTD No.818, Yongjun Road, Dipu Town, Anji County, Huzhou City, 313300, Zhejiang, P.R. China	
Gegenstand der Prüfung: <i>Test item:</i>	Vibration Massager	
Bezeichnung: <i>Identification:</i>	LN-207-XJR, LN-603-XJR	Serien-Nr.: <i>Serial No.:</i> Engineering samples
Wareneingangs-Nr.: <i>Receipt No.:</i>	170375827	Eingangsdatum: <i>Date of receipt:</i> 2024-05-09
Zustand des Prüfgegenstandes bei Anlieferung: Condition of test item at delivery:	Good for testing and checking	
Prüfört: <i>Testing location:</i>	TÜV Rheinland (GuangDong) Co., Ltd. No.199 Kezhu Road, GZ Science City, Guangzhou 510663, P.R. China	
Prüfgrundlage: <i>Test specification:</i>	UL 1647: 2015 R7.20; CSA C22.2 NO. 68-18+GI1 (R2023)	
Prüfergebnis: <i>Test Result:</i>	Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). <i>The test item passed the test specification(s).</i>	
Prüflaboratorium: <i>Testing Laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd. 1F East & 2-4F, Cybio Technology Building No.1, No.16 Kejibei 2nd Road, High-Tech Industrial Park North Nanshan District, 518057, Shenzhen, China	
geprüft/ tested by:	kontrolliert/ reviewed by:	
		
2024-07-03 Venice Liu / Vincent Tu / PE	2024-07-03 Sailing Li / TC	
Datum <i>Date</i>	Name <i>Name</i>	Unterschrift <i>Signature</i>
Datum <i>Date</i>	Name <i>Name</i>	Unterschrift <i>Signature</i>
Sonstiges/ Other Aspects:		
1. This report is issued for cTUVus mark approval;		
2. Attachment 1: 4 pages of CDF; Attachment 2: photo document (7 pages with cover page)		
Abkürzungen:	<i>P(ass) = entspricht Prüfgrundlage</i>	Abbreviations: <i>P(ass) = passed</i>
	<i>F(ail) = entspricht nicht Prüfgrundlage</i>	<i>F(ail) = failed</i>
	<i>N/A = nicht anwendbar</i>	<i>N/A = not applicable</i>
	<i>N/T = nicht getestet</i>	<i>N/T = not tested</i>
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.		
<i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>		

TEST REPORT UL 1647 & CSA C22.2 NO. 68 Motor-Operated Massage and Exercise Machines	
Report Reference No	See cover page
Tested by (printed name and signature)	See cover page
Approved by (printed name and signature)	See cover page
Date of issue	See cover page
Testing Laboratory Name	See cover page
Address	See cover page
Testing location	See cover page
Address	See cover page
Applicant's Name	See cover page
Address	See cover page
Test specification	
Standard	See cover page
Test procedure	cTUVus
Non-standard test method	N/A
Test Report Form No	N/A
TRF originator	TÜV Rheinland (Shenzhen) Co., Ltd.
Test item description	Vibration Massager
Trademark	
Manufacturer	Anji Linuo Electronic Technology Co.,LTD No.818, Yongjun Road, Dipu Town, Anji County, Huzhou City, 313300, Zhejiang, P.R. China
Factory	Anji Linuo Electronic Technology Co.,LTD No.818, Yongjun Road, Dipu Town, Anji County, Huzhou City, 313300, Zhejiang, P.R. China
Model and/or type reference	LN-207-XJR, LN-603-XJR (X="1-10"; this number represents the quantity of motor, "1" represents 1 pc motor, "10" represents 10 pcs motor.)
Serial number	N/A
Rating(s)	For switching power supply: Input: 100-240VAC, 50/60Hz, 0.5A; Class 2 Output :12.0VDC, 1.0A, 12.0W; Massager: 12VDC, 1A.

Copy of marking plate:



Copy of warning marking:



Copy of intructions:**HOW TO USE**

- 1、 Insert adapter jack into the socket found on back of the massage chair, then plug the adapter into a wall outlet(see Figure A)



- 2、 Turn the unit **ON** by pressing the **POWER** button once, The LED will illuminate when power is on.
- 3、 Turn on the massage in each zone by pressing the **BACK**, **LUMBAR**, **THINGS** or **LEGS** buttons. LEDs will illuminate when each zone is activated. To turn off a zone, press the button again.
- 4、 To choose a desired massage mode, press the **MODE** button. To change modes, press **MODE** button until LED for desired mode illuminates
 - PULSE**---for deep tapping massage
 - PRESS**---provides rapid tapping massage
 - WAVE**----for a gradual, side-to-side vibrating massage
 - AUTO**---provides a random pulsing massage to all zones
 - NORMAL**---for a firm, vibrating massage
- 5、 To change the massage intensity press the **INTENSITY** button. The LED for **HIGH** or **LOW** intensities will illuminate when chosen.
NOTE: Discontinue use immediately if you feel any discomfort or pain.
- 6、 NOTE: for your benefit, the massage chair is equipped with an auto shut-off feature that .
- 7、 DO NOT use for more than 60 minutes of continuous use.

Copy of instructions:**IMPORTANT SAFETY INSTRUCTIONS**

When using an electrical appliance, basic precautions should always be followed, including the following:

- 1、 This product is for use on a 12V circuit. Make sure that the product is connected to an outlet having the same configuration as the plug.
- 2、 Always unplug the massager from the power source after use, and before cleaning.
- 3、 Do not reach for massager if it has fallen into water. Unplug immediately.
- 4、 An appliance should never be left unattended when plugged in. Unplug from outlet when not in use, before putting on or taking off parts or attachments.
- 5、 Do not use outdoors.
- 6、 Do not carry this appliance by supplied cord as a handle.
- 7、 Keep the cord away from heated surfaces.
- 8、 Close supervision is necessary when this appliance is used by or near children, invalids or disabled persons.
- 9、 This unit is not a toy. Children should not use it or play with it.
- 10、 Do not operate where aerosol (spray) products are being used or where oxygen is being administered.
- 11、 Do not use near eyes or other highly sensitive areas.
- 12、 To disconnect, push "POWER" key to "OFF" place, make sure all functions stopped, then remove plug from outlet.
- 13、 Keep cord away from heated surfaces.
- 14、 Use this appliance only for its intended use as described in this manual. Do not use attachments not provided with the unit.

Copy of instructions:**HEALTH CAUTION**

- If you have any concerns regarding your health, consult your doctor before using this product.
- Individuals with pacemakers should not use this product.
- If you experience pain in a muscle or joint for a prolonged period of time. Discontinue use and consult your doctor. Persistent pain could be a symptom of a more serious condition.

MAINTENANCE INSTRUCTIONS**TO STORE:**

Place unit in its box or safe, dry, cool place. Avoid contact with sharp edges or pointed objects which might cut or puncture the fabric. Do not wrap power cord around the unit. Do not hang the unit by power cord.

TO CLEAN:

- Insure the unit is unplugged from the power source, and allow to cool before cleaning.
- Do not place in any liquid to clean. Clean fabric cover by wiping with a damp sponge, using a mild detergent or suds. Pat dry with clean, dry cloth.

- Do not use abrasive cleaners, brushes, gasoline, kerosene, glass /furniture polish, paint thinner or water hotter than 120°C to clean the unit.
- To clean the unit, make sure the massager is unplugged. Allow the unit to cool and the wipe down with a damp clean cloth. Do not use any strong chemical cleaners.

Summary of testing:

The models were tested and fulfilled the test specifications.

The tested models were complied with the test standards UL 1647 and CSA C22.2 No. 68.

The following tests were performed:

Test Description	UL 1647: 2015 R7.20 / Clause	CSA C22.2 NO. 68- 18+GI1 (R2023) / Clause
Input Test	48	6.4
Temperature Test	49, 50, 51	6.5
Dielectric Voltage-Withstand Test	52	6.6
Overload Protection, Temperature Rise Measurements T1 And T2	64	6.7.5
Fault Condition Tests (Abnormal Test For Electronic Circuit)	64	6.7.5
Fault Condition Tests	64	6.7

Note:

Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated above with results in conformance to the relevant test criteria.

Particulars: test item vs. test requirements:

Equipment mobility : Portable
 Operating condition : Continuous
 Mass of equipment (kg) : N/A

Test case verdicts

Test case does not apply to the test object : N/A
 Test item does meet the requirement : P(ass)
 Test item does not meet the requirement .. : F(ail)

Testing

Date of receipt of test item : 2024-05-09
 Date(s) of performance of test : 2024-05-09 to 2024-05-15

General remarks

The test result presented in this report relate only to the object(s) tested.
 This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.
 "(see Enclosure #)" refers to additional information appended to the report.
 "(see appended table)" refers to a table appended to the report.
 Throughout this report a point is used as the decimal separator.

General product information:

1. The products covered by this report are vibration massager, which are intended for use as components of complete equipment submitted for investigation rather than for direct separate installation in the field.
2. The final acceptance of the component is dependent upon its installation and use in complete equipment
3. All equipment are intended for installation and use in accordance with National Electrical Code, NFPA 70.

Conditions of acceptability:

1. This vibration massager is for massage and heating function purpose, which is intended to be used conjunction with massage chair or similar equipment.
2. Consideration is to be given to the conditions of acceptability specified in the individual reports when these components are employed in the end-use equipment.
3. This vibration massager shall be installed at location where water or rain not be involved.

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	CONSTRUCTION		P
5	Components		P
5.1	General		P
5.1.1	A component of a product covered by this standard shall:		P
	a) Comply with the requirements for that component as indicated in 5.2 - 5.26;		P
	b) Be used in accordance with its rating(s) established for the intended conditions of use;	Refer to CDF.	P
	c) Be used within its established use limitations or conditions of acceptability;		P
	d) Additionally comply with the applicable requirements of this end product standard; and		P
	e) Not contain mercury.		P
	Exception No. 1: A component of a product covered by this standard is not required to comply with a specific component requirement that:		P
	a) Involves a feature or characteristic not required in the application of the component in the product;		P
	b) Is superseded by a requirement in this standard; or		P
	c) Is separately investigated when forming part of another component, provided the component is used within its established ratings and limitations.		P
	Exception No. 2: A component that complies with a UL component standard other than those specified in 5.2 - 5.26 is acceptable if:		P
	a) The component also complies with the applicable component standard specified in 5.2 - 5.26; or		P
	b) The component standard:		P
	1) Is compatible with the ampacity and overcurrent protection requirements in the National Electrical Code, ANSI/NFPA 70, where applicable;		P
	2) Considers long-term thermal properties of polymeric insulating materials in accordance with the Standard for Polymeric Materials - Long Term Property Evaluations, UL 746B; and		P
	3) Any use limitations of the other component standard is identified and appropriately accommodated in the end use application. For example, a component used in a household application, but intended for industrial use and complying with the relevant component standard may assume user expertise not common in household applications.		P
5.1.2	Specific components are incomplete in construction features or restricted in performance capabilities. Such components are intended for use only under limited conditions, such as certain temperatures not exceeding specified limits, and shall be used only under those specific conditions.		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
5.1.3	A component that is also intended to perform other functions, such as over current protection, ground-fault circuit-interruption, surge suppression, any other similar functions, or any combination thereof, shall comply additionally with the requirements of the applicable UL standard(s) that cover devices that provide those functions.	No such construction	N/A
	Exception: Where these other functions are not required for the application and not identified as part of markings, instructions, or packaging for the appliance, the additional component standard(s) need not be applied.		N/A
5.1.4	A component not anticipated by the requirements of this end product standard, not specifically covered by the component standards in 5.2 - 5.26, and that involves a risk of fire, electric shock, or injury to persons, shall be additionally investigated in accordance with the applicable UL standard, and shall comply with 5.1.1(b) - (e).		N/A
5.1.5	With regard to a component being additionally investigated, reference to construction and performance requirements in another UL end product standard is suitable where that standard anticipates normal and abnormal use conditions consistent with the application of this end product standard.		N/A
5.2	Attachment plugs, receptacles, connectors, and terminals		N/A
5.2.1	Attachment plugs, receptacles, appliance couplers, appliance inlets (motor attachment plugs), and appliance (flatiron) plugs, shall comply with the Standard for Attachment Plugs and Receptacles, UL 498. See 5.2.9.		N/A
	Exception No. 1 : Attachment plugs and appliance couplers integral to attached or detachable power supply cords that are investigated in accordance with the Standard for Cord Sets and Power Supply Cords, UL 817 are not required to comply with UL 498.		N/A
	Exception No. 2 : A fabricated pin terminal assembly need not comply with UL 498 if it complies with Mechanical Assembly, Section 9, Accessibility of Uninsulated Live Parts and Film-Coated Wire, Section 12, Current Carrying Parts, Section 14, Electrical Insulation, Section 15, and Spacings, Section 29, of this end product standard.		N/A
5.2.2	Quick-connect terminals, both connectors and tabs, for use with one or two 22 - 10 AWG copper conductors, having nominal widths of 2.8, 3.2, 4.8, 5.2, and 6.3 mm (0.110, 0.125, 0.187, 0.205, and 0.250 in), intended for internal wiring connections in appliances, or for the field termination of conductors to appliance, shall comply with the Standard for Electrical Quick-Connect Terminals, UL 310.		N/A
	Exception No. 1: Other sizes of quick-connect terminals shall be investigated with respect to crimp pull out, insertion-withdrawal, temperature rise, and all tests shall be conducted in accordance with UL 310.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	Exception No. 2: A connector that complies with UL 310 may be used with an appropriately sized tab that complies with the material, configuration, and dimensional requirements for production tabs as specified in UL 310. The connector is the part of a quick-connect terminal that is pushed onto the male tab, and the tab is the part that receives the female connector.		N/A
5.2.3	Single and multipole connectors for use in data, signal, control and power applications within and between electrical equipment, and that are intended for factory assembly to copper or copper alloy conductors, or for factory assembly to printed wiring boards, shall comply with the Standard for Component Connectors for Data, Signal, Control and Power Applications, UL 1977. See 5.2.9.		N/A
5.2.4	Wire connectors shall comply with the Standard for Wire Connectors, UL 486A-486B.		N/A
5.2.5	Splicing wire connectors shall comply with the Standard for Splicing Wire Connectors, UL 486C.		N/A
5.2.6	Multi-pole splicing wire connectors that are intended to facilitate the connection of hard-wired utilization equipment to the branch-circuit conductors of buildings shall comply with the Standard for Insulated Multi-Pole Splicing Wire Connectors, UL 2459. See 5.2.9.		N/A
5.2.7	Equipment wiring terminals for use with all alloys of copper, aluminum, or copper-clad aluminum conductors, shall comply with the Standard for Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors, UL 486E.		N/A
5.2.8	Terminal blocks shall comply with the Standard for Terminal Blocks, UL 1059, and, if applicable, be suitably rated for field wiring.		N/A
	Exception: A fabricated part performing the function of a terminal block need not comply with UL 1059 if the part complies with the requirements of Wiring Terminals and Leads, Section 13.2.3, Electrical Insulation, Section 15, and Spacings, Section 29, of this end product standard. This exception does not apply to protective conductor terminal blocks.		N/A
5.2.9	Female devices (such as receptacles, appliance couplers, and connectors) that are intended, or that may be used, to interrupt current in the end product, shall be suitably rated for current interruption of the specific type of load, when evaluated with its mating plug or connector. For example, an appliance coupler that can be used to interrupt the current of a motor load shall have a suitable horsepower rating when tested with its mating plug.		N/A
5.3	Batteries and battery chargers		N/A
5.3.1	A lithium ion (Li-On) single cell battery shall comply with the requirements for secondary lithium cells in the Standard for Lithium Batteries, UL 1642. A lithium ion multiple cell battery, and a lithium ion battery pack, shall comply with the applicable requirements for secondary lithium cells or battery packs in the Standard for Household and Commercial Batteries, UL 2054.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
5.3.2	Rechargeable nickel cadmium (Ni-Cad) cells and battery packs shall comply with the applicable construction and performance requirements of this end product standard.		N/A
5.3.3	Rechargeable nickel metal-hydride (Ni-MH) battery cells and packs shall comply with construction and performance requirements of this end product standard, or the applicable requirements for secondary cells or battery packs in the Standard for Household and Commercial Batteries, UL 2054.		N/A
5.3.4	Primary batteries (non-rechargeable) that comply with the applicable UL standards and the requirements in General, Section 5.1 are considered to comply with the requirements of this end product standard.		N/A
5.3.5	A Class 2 battery charger shall comply with one of the following:		N/A
	a) The Standard for Class 2 Power Units, UL 1310; or		N/A
	b) The Standard for Information Technology Equipment - Safety - Part 1: General Requirements, UL 60950-1, with an output marked "Class 2", or that complies with the limited power source (LPS) requirements and is marked "LPS".		N/A
5.3.6	A non-Class 2 battery charger shall comply with one of the following:		N/A
	a) The Standard for Power Units Other Than Class 2, UL 1012; or		N/A
	b) The Standard for Information Technology Equipment - Safety - Part 1: General Requirements, UL 60950-1.		N/A
5.4	Boxes and raceways		N/A
5.4.1	Electrical boxes and the associated bushings and fittings, and raceways, of the types specified in Chapter 3, Wiring Methods and Materials, of the National Electrical Code, ANSI/NFPA 70 and that comply with the relevant UL standard (such as the Standard for Metallic Outlet Boxes, UL 514A, the Standard for Nonmetallic Outlet Boxes, Flush-Device Boxes, and Covers, UL 514C, or the Standard for Cover Plates for Flush-Mounted Wiring Devices, UL 514D) and the requirements in General, Section 5.1 are considered to comply with the requirements in this end product standard.		N/A
5.5	Capacitors and filters		N/A
5.5.1	The component requirements for a capacitor are not specified. A capacitor that complies with the Standard For Safety For Capacitors, UL 810, is considered to comply with the requirements in Grounding-General, Section 19.1.		N/A
5.5.2	Electromagnetic interference filters with integral enclosures that comply with the Standard for Electromagnetic Interference Filters, UL 1283 are considered to comply with the requirements in Grounding-General, Section 19.1.		N/A
5.6	Controls		P
5.6.1	General		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
5.6.1.1	Auxiliary controls shall be evaluated in accordance with the applicable requirements of this end product standard and the parameters in Controls - End Product Test Parameters, Section 27 unless otherwise specified in this end product standard; see 5.6.1.7.		P
5.6.1.2	Operating (regulating) controls shall be evaluated in accordance with the applicable component standard requirements specified in 5.6.2 - 5.6.7, if applicable, and the parameters in Controls - End Product Test Parameters, Section 27, unless otherwise specified in this end product standard; see 5.6.1.7.		P
5.6.1.3	Operating controls that rely upon software for the normal operation of the end product where deviation or drift of the control may result in a risk of fire, electric shock, or injury to persons, such as a speed control unexpectedly changing its output, shall comply with one of the following:		N/A
	a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991, and the Standard for Software in Programmable Components, UL 1998; or		N/A
	b) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1.		N/A
5.6.1.4	Protective (limiting) controls shall be evaluated in accordance with the applicable component standard requirements specified in 5.6.2 - 5.6.7 and if applicable, the parameters in Controls - End Product Test Parameters, Section 27, unless otherwise specified in this end product standard.		N/A
5.6.1.5	Solid-state protective controls that do not rely upon software as a protective component shall comply with one of the following:		N/A
	a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991; or		N/A
	b) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1, except the Controls Using Software requirements, Clause H 11.12.		N/A
5.6.1.6	Solid-state protective controls that rely upon software as a protective component shall comply with one of the following:		N/A
	a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991, and the Standard for Software in Programmable Components, UL 1998; or		N/A
	b) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1.		N/A
5.6.1.7	An electronic, auxiliary or operating control (e.g. a non-protective control), the failure of which would not increase the risk of fire, electric shock, or injury to persons, need only be subjected to the applicable requirements of this end product standard.		P
5.6.2	Electromechanical and electronic controls		N/A
5.6.2.1	A control, other than as specified in 5.6.3 - 5.6.7, shall comply with one of the following:		N/A
	a) The Standard for Solid-State Controls for Appliances, UL 244A;		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	b) The Standard for Temperature-Indicating and -Regulating Equipment, UL 873; or		N/A
	c) The Standard for Automatic Electrical Controls - General Requirements, UL 60730-1.		N/A
5.6.3	Liquid level controls	No such part.	N/A
5.6.3.1	A liquid level control shall comply with one of the following:		N/A
	a) The Standard for Solid-State Controls for Appliances, UL 244A;		N/A
	b) The Standard for Temperature-Indicating and -Regulating Equipment, UL 873;		N/A
	c) The Standard for Industrial Control Equipment, UL 508; or		N/A
	d) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1, and;		N/A
	1) The Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Automatic Electrical Air Flow, Water Flow and Water Level Sensing Controls, UL 60730-2-15; or		N/A
	2) The Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Automatic Electrical Water and Air Flow Sensing Controls, Including Mechanical Requirements, UL 60730-2-18.		N/A
5.6.4	Motor and speed controls		P
5.6.4.1	A control used to start, stop, regulate or control the speed of a motor shall comply with one of the following:		N/A
	a) The Standard for Solid-State Controls for Appliances, UL 244A;		N/A
	b) The Standard for Temperature-Indicating and -Regulating Equipment, UL 873;		N/A
	c) The Standard for Industrial Control Equipment, UL 508;		N/A
	d) The Standard for Power Conversion Equipment, UL 508C; or		N/A
	e) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1.		N/A
	Exception: A control that controls the speed and acceleration of the treadmill belt shall comply with Switches and Controls, Section 40.1.		P
5.6.5	Pressure controls	No such control.	N/A
5.6.5.1	A pressure control shall comply with one of the following:		N/A
	a) The Standard for Temperature-Indicating and -Regulating, UL 873;		N/A
	b) The Standard for Industrial Control Equipment, UL 508; or		N/A
	c) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Automatic Electrical Pressure Sensing Controls Including Mechanical Requirements, UL 60730-2-6.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
5.6.6	Temperature controls		P
5.6.6.1	A temperature control shall comply with one of the following:		N/A
	a) The Standard for Solid-State Controls for Appliances, UL 244A;		N/A
	b) The Standard for Temperature-Indicating and -Regulating Equipment, UL 873;		N/A
	c) The Standard for Industrial Control Equipment, UL 508; or		N/A
	d) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls - Part 2-9: Particular Requirements for Temperature Sensing Controls, UL 60730-2-9.		P
	Exception: A thermostat used in a heating pad assembly that complies with the requirements in Thermostat Test, Section 59 of this end product standard is considered to comply with the intent of this requirement.		N/A
5.6.6.2	A temperature sensing positive temperature coefficient (PTC) or a negative temperature coefficient (NTC) thermistor, that performs the same function as an operating or protective control shall comply with the Standard for Thermistor-Type Devices, UL 1434.		P
5.6.6.3	A thermal cutoff shall comply with the Standard for Thermal-Links - Requirements and Application Guide, UL 60691.		N/A
5.6.7	Timer controls		N/A
5.6.7.1	A timer control shall comply with one of the following:		N/A
	a) The Standard for Solid-State Controls for Appliances, UL 244A; or		N/A
	b) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Timers and Time Switches, UL 60730-2-7.		N/A
5.7	Cords, cables, and internal wiring		P
5.7.1	An attached or detachable power supply cord shall comply with the Standard for Cord Sets and Power Supply Cords, UL 817.	Refer to CDF.	N/A
5.7.2	Flexible cords and cables shall comply with the Standard for Flexible Cords and Cables, UL 62. Flexible cord and cables are considered to comply with this requirement when pre-assembled in an attached or detachable power supply cord complying with the Standard for Cord Sets and Power Supply Cords, UL 817.		N/A
5.7.3	Internal wiring composed of insulated conductors shall comply with the Standard for Appliance Wiring Material, UL 758.		P
	Exception No. 1: Insulated conductors need not comply with UL 758 if they comply with one of the following:		N/A
	a) The Standard for Thermoset-Insulated Wires and Cables, UL 44;		N/A
	b) The Standard for Thermoplastic-Insulated Wires and Cables, UL 83;		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	c) The Standard for Fixture Wire, UL 66; or		N/A
	d) The applicable UL standard(s) for other insulated conductor types specified in Chapter 3, Wiring Methods and Materials, of the National Electrical Code, ANSI/NFPA 70.		N/A
	Exception No. 2: Insulated conductors for specialty applications (e.g. data processing or communications) and located in a low-voltage circuit not involving the risk of fire, electric shock or injury to persons need not comply with UL 758.		N/A
5.8	Cord reels		N/A
5.8.1	A cord reel shall comply with special use cord reel requirements in the Standard for Cord Reels, UL 355.		N/A
5.9	Film-coated wire (magnet wire)		N/A
5.9.1	The component requirements for film coated wire and Class 105 (A) insulation systems are not specified.		N/A
5.9.2	Film coated wire in intimate combination with one or more insulators, and incorporated in an insulation system rated Class 120 (E) or higher, shall comply with the magnet wire requirements in the Standard for Systems of Insulating Materials - General, UL 1446.		N/A
5.10	Gaskets and seals		N/A
5.10.1	Gaskets and seals that comply with the Standard for Gaskets and Seals, UL 157, are considered to comply with the requirements of 11.2 and 44.2.		N/A
5.11	Ground-fault, arc-fault, and leakage current detectors/interrupters		N/A
5.11.1	Ground-fault circuit-interrupters (GFCI) for protection against electrical shock shall comply with the Standard for Ground-Fault Circuit-Interrupters, UL 943. The following statement, or equivalent, shall be included as a marking near the GFCI, or as an instruction in the manual: "Press the TEST button (then RESET button) every month to assure proper operation."		N/A
5.11.2	Appliance-leakage-current interrupters (ALCI) for protection against electrical shock shall comply with the Standard for Appliance-Leakage-Current Interrupters, UL 943B.		N/A
5.11.3	With respect to 5.11.2, an ALCI is not considered an acceptable substitute for a GFCI when the National Electrical Code, ANSI/NFPA 70 requires a GFCI.		N/A
5.11.4	Equipment ground-fault protective devices shall comply with the Standard for Ground-Fault Sensing and Relaying Equipment, UL 1053, and the applicable requirements of the Standard for Ground-Fault Circuit-Interrupters, UL 943.		N/A
5.11.5	Arc-fault circuit-interrupters (AFCI) shall comply with the Standard for Arc-Fault Circuit-Interrupters, UL 1699. See Arc-Fault and Leakage Current Detectors/Interrupters, Section 24.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
5.11.6	Leakage-current detector-interrupters (LCDI) and any shielded cord between the LCDI and appliance shall comply with the Standard for Arc-Fault Circuit-Interrupters, UL 1699. See Arc-Fault and Leakage Current Detectors/Interrupters, Section 24.		N/A
5.12	Heaters, heating elements and pads		P
5.12.1	Electric resistance heating elements shall comply with the construction requirements in the:		P
	a) The Standard for Electric Heating Appliances, UL 499; or		P
	b) The Standard for Sheathed Heating Elements, UL 1030.		N/A
	Exception: Heating wire (e.g. rope heater) that complies with the Standard for Appliance Wiring Material, UL 758, and the requirements of this end product standard are considered to comply with this requirement.		N/A
5.12.2	Thermistor-type heaters (e.g. PTC and NTC heaters) shall comply with the Standard for Thermistor-Type Devices, UL 1434.		N/A
5.12.3	A heating pad assembly shall comply with the applicable requirements in the Standard for Electric Heating Pads, UL 130.		N/A
	Exception: A heating pad assembly that is not accessible as determined by the requirements in Accessibility of Uninsulated Live Parts and Film-Coated Wire, Section 12 of this end product standard, and that complies with the requirements of this end product standard, need not comply with UL 130. See the Resistance to Moisture Test, Section 53, Thermostat Test, Section 59, and Flexing and Twisting Test, Section 62.		N/A
5.13	Insulation systems		N/A
5.13.1	Materials used in a Class 105 (A) insulation system shall comply with 23.3.		N/A
5.13.2	Materials used in an insulation system that operates above Class 105 (A) temperatures shall comply with the Standard for Systems of Insulating Materials - General, UL 1446.		N/A
5.13.3	All insulation systems employing integral ground insulation shall comply with the requirements specified in the Standard for Systems of Insulating Materials - General, UL 1446.		N/A
5.14	Light sources and associated components		N/A
5.14.1	Lampholders and indicating lamps shall comply with the Standard for Lampholders, UL 496.		N/A
	Exception: Lampholders forming part of a luminaire that complies with the applicable UL luminaire standard(s) are considered to comply with this requirement.		N/A
5.14.2	Lighting ballasts shall comply with one of the following:		N/A
	a) The Standard for Fluorescent-Lamp Ballasts, UL 935; or		N/A
	b) The Standard for High-Intensity Discharge Lamp Ballasts, UL 1029.		N/A
	Exception No. 1: Ballasts forming part of a luminaire that complies with an applicable UL luminaire standard are considered to comply with this requirement.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	Exception No. 2: Ballasts for other light sources shall comply with the applicable UL standard(s).		N/A
5.14.3	Light emitting diode (LED) light sources shall comply with the Standard for Light Emitting Diode (LED) Equipment For Use In Lighting Products, UL 8750.		N/A
	Exception No. 1: LED light sources forming part of a luminaire that complies with an applicable UL luminaire standard are considered to comply with this requirement.		N/A
	Exception No. 2: Individual LED light sources mounted on printed wiring boards and intended for indicating purposes need not comply with UL 8750, but shall comply with the applicable requirements of this end product standard.		N/A
5.15	Marking and labeling systems		P
5.15.1	A marking and labeling system shall comply with the Standard for Marking and Labeling Systems, UL 969, under the specified environmental conditions.		P
	Exception: A marking or labeling system that complies with the requirements in the Permanence of Marking Test, Section 65 of this end product standard is considered to comply with the requirement.		N/A
5.16	Motors, generators and motor overload protection		P
5.16.1	General		P
5.16.1.1	General-purpose type motors having a NEMA frame size shall comply with the requirements specified in General-Purpose Type Motors, Section 5.16.2. This includes fractional HP motors rated up to 1 HP (typically NEMA frame sizes 42, 48, or 56), and integral HP motors rated 1 HP and greater (typically NEMA frame sizes 140 - 449T).		N/A
5.16.1.2	Motors not enclosed, or partially enclosed, by the end product enclosure shall comply with the requirements specified in General-Purpose Type Motors, Section 5.16.2.	Enclosed by end product.	N/A
5.16.1.3	Component type motors completely enclosed within the end product enclosure and generators shall comply with the requirements specified in General-Purpose Type Motors and Generators, Section 5.16.2 or Component Type Motors and Generators, Section 5.16.3.		P
5.16.1.4	Motors and generators located in a low-voltage circuit are evaluated for the risk of fire, electric shock, or injury to persons in accordance with the applicable requirements of this end product standard.		P
5.16.1.5	Low voltage component fans that comply with the Standard for Electric Fans, UL 507, are considered to comply with the requirements for Motors, Section 22 of this end product standard.		N/A
5.16.2	General-purpose type motors and generators		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
5.16.2.1	A general-purpose type motor or generator shall comply with the Standard for Rotating Electrical Machines - General Requirements, UL 1004-1.		N/A
5.16.3	Component type motors and generators		P
5.16.3.1	Component type motors and generators shall comply with either 5.16.3.2 or 5.16.3.3.		P
5.16.3.2	The motor or generator shall comply with the Standard for Rotating Electrical Machines - General Requirements, UL 1004-1 except as noted in Table 5.1.		P
5.16.3.3	The motor or generator shall comply with the applicable component requirements for Components, Section 5, the following construction requirements, and the applicable performance requirements (when tested in conjunction with the end product), of this end product standard:		P
	a) Protection Against Corrosion, Section 11;		N/A
	b) Terminal Compartment, Section 13 (13.2.2.3);		N/A
	c) Electrical Insulation, Section 15;		N/A
	d) Internal Wiring, Section 16;		N/A
	e) Capacitors, Section 18;		N/A
	f) Grounding, Section 19;		N/A
	g) Motors, Section 22; and		P
	h) Spacings, Section 29.		N/A
5.16.4	Motor overload protection		P
5.16.4.1	Thermal protection devices integral with the motor shall comply with one of the following:		N/A
	a) The Standard for Overheating Protection for Motors, UL 2111;		N/A
	b) The Standard for Thermally Protected Motors, UL 1004-3; or		N/A
	c) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2 Particular Requirements for Thermal Motor Protectors, UL 60730-2-2; in conjunction with the Standard for Thermally Protected Motors, UL 1004-3 (to evaluate the motor-protector combination).		N/A
5.16.4.2	Impedance protection shall comply with the Standard for Impedance Protected Motors, UL 1004-2.		P
5.16.4.3	Electronic protection integral to the motor shall comply with the Standard for Electronically Protected Motors, UL 1004-7.		N/A
5.16.4.4	Except as indicated in 5.16.4.3, electronically protected motor circuits shall comply with one of the following. See Motor and Speed Controls, Section 5.6.4 for basic control requirements:		N/A
	a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991. When the protective electronic circuit is relying upon software as a protective component, it shall comply with the requirements in the Standard for Software in Programmable Components, UL 1998. If software is relied upon to perform a safety function, it shall be considered software Class 1;		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	b) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1. If software is relied upon to perform a safety function, it shall be considered software Class B; or		N/A
	c) The Standard for Power Conversion Equipment, UL 508C.		N/A
	Exception: Compliance with the above standards is not required for an electronically protected motor circuit if there is no risk of fire, electric shock, or injury to persons during abnormal testing with the motor electronic circuit rendered ineffective; compliance with the applicable requirements of this end product standard is then required.		N/A
5.17	Overcurrent protection		N/A
5.17.1	Fuses shall comply with the Standard for Low-Voltage Fuses - Part 1: General Requirements, UL 248-1; and the applicable UL 248 Part 2 (e.g. UL 248-5). Defined use fuses that comply with UL 248-1 and another applicable UL standard(s) for fuses are considered to comply with this requirement.		N/A
5.17.2	Fuseholders shall comply with the Standard for Fuseholders - Part 1: General Requirements, UL 4248-1, and the applicable Part 2 (e.g. Standard for Fuseholders - Part 9: Class K, UL 4248-9).		N/A
5.17.3	Circuit breakers shall comply with the Standard for Molded-Case Circuit Breakers, Molded-Case Switches and Circuit-Breaker Enclosures, UL 489.		N/A
	Exception: Circuit breakers used in telecommunications circuitry that comply with the Standard for Circuit Breakers For Use in Communications Equipment, UL 489A, need not comply with UL 489.		N/A
5.17.4	Circuit breakers having integral ground fault circuit interrupter capability for protection against electrical shock shall additionally comply with the Standard for Ground-Fault Circuit-Interrupters, UL 943.		N/A
5.17.5	Supplementary protectors shall comply with the Standard for Supplementary Protectors for Use in Electrical Equipment, UL 1077.		N/A
5.17.6	Fusing resistors shall comply with the Standard for Fusing Resistors and Temperature-Limited Resistors for Radio- and Television-Type Appliances, UL 1412.		N/A
5.18	Polymeric materials and enclosures		P
5.18.1	Unless otherwise specified in this end product standard, polymeric electrical insulating materials and enclosures shall comply with the applicable requirements of the Standard for Polymeric Materials - Use in Electrical Equipment Evaluations, UL 746C.		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
5.18.2	Metallized or painted polymeric parts or enclosures shall comply with the applicable requirements of the Standard for Polymeric Materials - Use in Electrical Equipment Evaluations, UL 746C. This requirement is not applicable to exterior surfaces of polymeric enclosure materials or parts provided that the metallized coating or paint does not offer a continuous path for an internal flame to propagate externally.		N/A
5.19	Power supplies		P
5.19.1	A Class 2 power supply shall comply with one of the following:		P
	a) The Standard for Class 2 Power Units, UL 1310; or		P
	b) The Standard for Information Technology Equipment - Safety - Part 1: General Requirements, UL 60950-1, with an output marked "Class 2", or that complies with the limited power source (LPS) requirements and is marked "LPS".		N/A
5.19.2	A non-Class 2 power supply shall comply with one of the following:		N/A
	a) The Standard for Power Units Other Than Class 2, UL 1012; or		N/A
	b) The Standard for Information Technology Equipment - Safety - Part 1: General Requirements, UL 60950-1.		N/A
5.20	Printed wiring boards		P
5.20.1	Printed wiring boards, including the coatings, shall comply with the Standard for Printed Wiring Boards, UL 796.		P
	Exception: A printed-wiring board in a Class 2 nonsafety circuit is not required to comply with the bonding requirements in UL 796 if the board is separated from parts of other circuits such that loosening of the bond between the foil conductor and the base material will not result in the foil conductors or components coming in contact with parts of other circuits of the control or of the end-use product.		N/A
5.20.2	A printed-wiring board containing circuitry in a line-connected circuit or a safety circuit shall comply with the direct-support requirements for insulating materials in Electrical Insulation, Section 15 of this end product standard.		N/A
5.20.3	Unless otherwise specified, the flammability class and temperature rating shall be that as specified in Electrical Insulation, Section 15 of this end product standard.		N/A
5.21	Semiconductors and small electronic components		N/A
5.21.1	A power switching semiconductor device that is relied upon to provide isolation to ground shall comply with the Standard for Safety for Optical Isolators, UL 1577. The Dielectric Voltage Withstand Tests required by UL 1577 shall be conducted applying the requirements of the Dielectric Voltage Withstand Test, Section 52, of this end product standard.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
5.21.2	An optical isolator that is relied upon to provide isolation between primary and secondary circuits or between other circuits as required by this end product standard shall comply with the Standard for Safety for Optical Isolators, UL 1577. The Dielectric Voltage Withstand Tests required by UL 1577 shall be conducted applying the requirements in Dielectric Voltage Withstand Test, Section 52 of this end product standard.		N/A
5.21.3	Except as specified in 5.21.4, component requirements are not specified for small electronic components on printed wiring boards, including diodes, transistors, resistors, inductors, integrated circuits, and capacitors not directly connected to the supply source.		N/A
5.21.4	Where an electronic component is determined to be a critical component during the Abnormal Operation Test, Section 64, one of the following standards shall be applied. See 27.4 of this end product standard for the test requirements to be used:		N/A
	a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991, including its Follow-Up Program; and as applicable, the Standard for Software in Programmable Components, UL 1998 for controls that rely upon software as a protective component; or		N/A
	b) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1.		N/A
5.21.5	A critical component, as specified in 5.21.4, is a component that performs one or more safety-related functions whose failure results in a condition, such as the risk of fire, electric shock, or injury to persons, in the end product application.		N/A
5.21.6	A critical component as specified in 5.21.4, may also be identified using a failure-mode and effect analysis (FMEA) in accordance with the Failure-Mode and Effect Analysis (FMEA) requirements in the Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991.		N/A
5.21.7	Portions of a circuit comprised of a microcontroller or other programmable device that performs a back-up, limiting, or other safety function intended to reduce the risk of fire, electric shock, or injury to persons shall comply with the Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1, Annex H.		N/A
5.22	Supplemental insulation, insulating bushings, and assembly aids		N/A
5.22.1	The requirements for supplemental insulation (e.g. tape, sleeving or tubing) are not specified unless the insulation or device is required to comply with 16.2.6 or a performance requirement of this end product standard. In such cases, the insulation shall comply with the following applicable standards:		N/A
	a) Insulating tape shall comply with the Standard for Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape, UL 510;		N/A
	b) Sleeving shall comply with the Standard for Coated Electrical Sleeving, UL 1441; or		N/A
	c) Tubing shall comply with the Standard for Extruded Insulating Tubing, UL 224.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
5.22.2	Wire positioning devices shall comply with the requirements in Insulating Material, Sections 15, and Separation of Circuits, Section 17. A device that complies with the Standard for Positioning Devices, UL 1565, is considered to comply with this requirement.		N/A
5.22.3	Insulating bushings that comply with the requirements in General, Section 5.1, of this end product standard, and the Standard for Insulating Bushings, UL 635 are considered to comply with the requirements of this end product standard. Tests specified in this end product standard (e.g. Strain Relief Test, Section 60) may still need to be performed to confirm the combination of the insulating bushing and the supporting part comply with the intent of the requirements.		N/A
5.23	Switches		N/A
5.23.1	Switches shall comply with one of the following:		N/A
	a) Deleted;		N/A
	b) The Standard for Switches for Appliances - Part 1: General Requirements, UL 61058-1;		N/A
	c) The Standard for General-Use Snap Switches, UL 20; or		N/A
	d) The Standard for Nonindustrial Photoelectric Switches for Lighting Control, UL 773A.		N/A
	Exception: Switching devices that comply with the applicable UL standards for specialty applications (e.g. transfer switch equipment), industrial use (e.g. contactors, relays, auxiliary devices), or are integral to another component (e.g. switched lampholder) need not comply with this requirement.		N/A
5.23.2	A clock-operated switch, in which the switching contacts are actuated by a clock-work, by a gear-train, by electrically-wound spring motors, by electric clock-type motors, or by equivalent arrangements shall comply with one of the following:		N/A
	a) The Standard for Clock-Operated Switches, UL 917; or		N/A
	b) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1, and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Timers and Time Switches, UL 60730-2-7.		N/A
5.23.3	A timer or time switch, incorporating electronic timing circuits or switching circuits, with or without separable contacts, shall comply with the requirements for an operating control with Type 1 action for 6000 cycles of operation, or as a manual control for 5000 cycles of operation, in accordance with one of the following:		N/A
	a) The Standard for Solid-State Controls for Appliances, UL 244A; or		N/A
	b) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Timers and Time Switches, UL 60730-2-7.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
5.23.4	A timer or time switch, incorporating electronic timing circuits or switching circuits, with or without separable contacts, that functions as a protective control, shall comply with the requirements for a protective control; see 5.6.1.3.		N/A
5.24	Transformers		N/A
5.24.1	General-purpose transformers shall comply with the Standard for Low Voltage Transformers: General Requirements, UL 5085-1; and the Standard for Low Voltage Transformers: General Purpose Transformers, UL 5085-2.		N/A
	Exception No. 1: A transformer that is completely enclosed within the end product enclosure, and that complies with the applicable construction and performance requirements of this end product standard when tested in conjunction with the end product, complies with the intent of this requirement.		N/A
	Exception No. 2: A transformer that complies with the Standard for Transformers and Motor Transformers for Use in Audio-, Radio-, and Television-Type Appliances, UL 1411, and that is used in a circuit involving an audio or video component complies with the intent of this requirement.		N/A
5.24.2	Class 2 and Class 3 transformers shall comply with the Standard for Low Voltage Transformers: General Requirements, UL 5085-1; and the Standard for Low Voltage Transformers: Class 2 and Class 3 Transformers, UL 5085-3.		N/A
	Exception: Transformers located in a low voltage circuit, and that do not involve a risk of fire, electric shock or injury to persons need not comply with this requirement.		N/A
5.25	Valves (electrically operated) and solenoids		N/A
5.25.1	Electrically operated valves shall comply with one of the following:		N/A
	a) The Standard for Electrically Operated Valves, UL 429; or		N/A
	b) The Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Electrically Operated Water Valves, Including Mechanical Requirements, UL 60730-2-8.		N/A
	Exception: Automatic valves intended for use with natural gas, manufactured gas, LP-gas or LP-gas-air mixtures shall comply with the Standard for Automatic Valves for Gas Appliances, ANSI Z21.21a/CSA 6.5a.		N/A
5.25.2	Solenoids shall comply with the applicable construction and performance requirements of this end-product standard.		N/A
5.26	Video and audio components		N/A
5.26.1	A video component (e.g. a television or video) or an audio component (such as a CD player, radio, MP3 player, or audio sound system) provided with a massage or exercise machine shall comply with one of the following:		N/A
	a) The Standard for Audio, Video, and Similar Electronic Apparatus-Safety Requirements, UL 60065; or		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	b) The Standard for Information Technology Equipment - Safety - Part 1: General Requirements, UL 60950-1.		N/A
5.26.2	The location, orientation, and intended use of a video or audio component shall be evaluated with the massage or exercise machine to ensure that the component(s) does not increase the risk of fire, electric shock, or injury to persons. Examples include, but are not limited to, the mechanical mounting of the component, and the effect of the audio and video component on the overall leakage current of the machine.		N/A
6	General		P
6.1	An appliance shall employ materials that are acceptable for the application.		P
6.2	An appliance employing a heating element is judged on the basis of its compliance with the requirements in this end product standard.		P
6.3	Foam padding provided with an appliance having a heating pad shall comply with the requirements for HBF or better material.		N/A
6.4	Thermoplastic material used for a part of an appliance having any dimension (length, width, or height) greater than 12 in (305 mm) shall be classified HB.		N/A
6.5	Fabric, batting, padding, foam, and synthetic or natural leather shall not be relied upon to serve as an electrical enclosure (or barrier) for insulated live parts, including internal wiring, and uninsulated live parts. Nor shall it be used to support a live part, be in direct contact with a live part, or be within 1/32 inch (0.8 mm) of a live part.		N/A
7	Frame and Enclosure		P
7.1	General		P
7.1.1	An appliance shall be formed and assembled so that it will have the strength and rigidity necessary to resist the abuses to which it is likely to be subjected, without resulting in a risk of fire, electric shock, or injury to persons due to total or partial collapse with resulting reduction of spacings, loosening or displacement of parts, or other serious defects.		P
7.1.2	For unreinforced, flat surfaces in general, cast metal shall not be less than 1/8 in (3.2 mm) thick, except that malleable iron may be not less than 3/32 in (2.4 mm) and die-cast metal may be not less than 5/64 in (2.0 mm) thick. Corresponding thicknesses of not less than 3/32, 1/16 (1.6 mm), and 3/64 in (1.2 mm), respectively, may be acceptable if the surface under consideration is curved, ribbed, or otherwise reinforced, or if the shape or size, or both, of the surface is such that the necessary mechanical strength is provided.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
7.1.3	An enclosure of sheet metal shall be judged with respect to its size, shape, thickness of metal, and its application, considering the intended use of the complete appliance. Sheet steel having a thickness of less than 0.026 in (0.66 mm) if uncoated or 0.029 in (0.74 mm) if galvanized or of nonferrous sheet metal having a thickness of less than 0.036 in (0.91 mm) shall not be used, except for relatively small areas or for surfaces that are curved or otherwise reinforced.		N/A
7.1.4	Sheet metal to which a wiring system is to be connected in the field shall have a thickness not less than 0.032 in (0.81 mm) if uncoated steel, not less than 0.034 in (0.86 mm) if galvanized steel, and not less than 0.045 in (1.14 mm) if nonferrous.		N/A
7.1.5	Among the factors that shall be evaluated when determining the acceptability of magnesium or a nonmetallic material, other than a polymeric material, are resistance to:		N/A
	a) Mechanical damage;		N/A
	b) Impact;		N/A
	c) Moisture absorption;		N/A
	d) Combustion; and		N/A
	e) Distortion at temperatures to which the material is subjected under conditions of normal or abnormal use.		N/A
7.1.5.1	With respect to resistance to combustion, wood or wood composite materials used to form outer enclosures shall be separated from ignition sources. In addition, the construction shall comply with the following:		N/A
	a) The enclosure shall comply with the Impact Test of 66.2 without exposure of live parts, including insulated wiring, or moving parts capable of causing injury; and		N/A
	b) Temperatures on the enclosure material during normal operation shall not exceeding the limit specified in Table 49.1 for wood or other combustible material.		N/A
7.1.5.2	Ignitions sources within line-voltage circuits of the appliance are considered to be:		N/A
	a) Uninsulated electrical connections, such as splicing wire connectors, quick-connect terminals, terminal connectors and other forms of wire connectors,		N/A
	b) Printed circuit board traces,		N/A
	c) Open coils and windings,		N/A
	d) Open contacts, and		N/A
	e) Wiring not employing VW-1 insulation.		N/A
	Exception No. 1: Type S, SE, SO, SOO, ST, STO, STOO, SJ, SJE, SJO, SJOO, SJT, SJTO, AND SJTOO power cords are not considered to be ignition sources.		N/A
	Exception No. 2: Impedance protected motors employing open-coil or exposed winding constructions are not considered to be ignition sources if they comply with 7.1.7(a)(2) without emission of flames or molten metal from the motor housing.		N/A
	Exception No. 3: Thermally protected motors having openings in their enclosures are not considered to be ignition sources if they comply with the requirements in 7.1.7(a)(3) or 7.1.7(a)(4).		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	Exception No. 4: Transformers complying with the Standard for Low Voltage Transformers - Part 1: General Requirements, UL 5085-1, and the Standard for Low Voltage Transformers - Part 2: General Purpose Transformers, UL 5085-2, are not considered to be ignition sources.		N/A
7.1.5.3	Separation of ignition sources from wood or wood composite materials shall consist of barriers and spacing as illustrated in Figure 7.0 as follows:	No such construction.	N/A
	a) A part located vertically below the ignition source and within Space A of Figure 7.0 shall be isolated by means of a barrier located and sized so that the barrier covers 5 degrees beyond each side of the ignition source as illustrated in Figure 7.0.		N/A
	b) A part located vertically above the ignition source and within Space B of Figure 7.0 shall be isolated by means of a barrier located and sized so that the barrier covers 30 degrees beyond each side of the ignition source as illustrated in Figure 7.0 and so that the minimum distance between the nonmetallic material and ignition source is no less than 4 inches (102 mm).		N/A
	c) A part located horizontally from the ignition source shall be isolated by means of a barrier located and sized so that the minimum straight line distance between the nonmetallic material and the ignition source is no less than 4 inches (102 mm).		N/A
	Exception: When the only ignition source is wiring not employing VW-1 insulation the minimum distance between the nonmetallic material and the ignition source may be 2 inches (51 mm).		N/A
7.1.5.4	The barrier specified in 7.1.5.3 shall be of metal or a nonmetallic material having a flammability class as specified in 7.2.1.		N/A
7.1.6	The enclosure of components energized as a result of a remotely or automatically controlled appliance function shall prevent molten metal, burning insulation, flaming particles, or the like, from falling on combustible materials, including the surface upon which the appliance is supported.		N/A
7.1.7	The requirement in 7.1.6 will necessitate that a switch, a relay, a solenoid, or the like, be individually and completely enclosed, except for terminals, unless it can be shown that malfunction of the component would not result in a risk of fire, or there are no openings in the bottom of the appliance enclosure. It will also necessitate the use of a barrier of noncombustible material:		N/A
	a) Under a motor unless:		N/A
	1) The structural parts of the motor or of the appliance provide the equivalent of such a barrier;		N/A
	2) The protection provided with the motor is such that no burning insulation or molten material falls to the surface that supports the appliance when the motor is energized under each of the following fault conditions:		N/A
	i) Open main winding;		N/A
	ii) Open starting winding;		N/A
	iii) Starting switch short-circuited; and		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	iv) Capacitor of permanent-split capacitor motor short circuited - the short-circuit is to be applied before the motor is energized, and the rotor is to be locked,		N/A
	3) The motor is provided with a thermal motor protector - a protective device that is sensitive to temperature and current - that will prevent the temperature of the motor windings from exceeding 125°C (257°F) under the maximum load under which the motor will run without causing the protector to cycle and from exceeding 150°C (302°F) with the rotor of the motor locked; or		N/A
	4) The motor complies with the requirements in the Standard for Overheating Protection for Motors, UL 2111, and the temperature of the motor winding will not exceed 150°C during the first 72 hours of operation with the rotor of the motor locked.		N/A
	b) Under wiring, unless it is neoprene- or thermoplastic-insulated.		N/A
7.1.8	The barrier mentioned in 7.1.7 shall be horizontal, shall be located as illustrated in Figure 7.1, and shall not have an area less than that described in that illustration. Openings for drainage, ventilation, and the like, may be employed in the barrier, provided such openings would not permit molten metal, burning insulation, or the like, to fall on combustible material.		N/A
	A - Region to be shielded by barrier. This will consist of the entire component if it is not otherwise shielded and will consist of the unshielded portion of a component that is partially shielded by the component enclosure or equivalent.		N/A
	B - Projection of outline of component on horizontal plane.		N/A
	C - Inclined line that traces out minimum area of barrier. The line is always tangent to the component, 5 degrees from the vertical, and oriented so that the area traced out on a horizontal plane is maximum.		N/A
	D - Location (horizontal) and minimum area for barrier. The area is that included inside the line of intersection traced out by the inclined line C and the horizontal plane of the barrier.		N/A
7.1.9	A door or a cover of an enclosure that provides access to any overload-protective device that requires resetting or renewal shall be hinged or otherwise attached in an equivalent manner.		N/A
7.1.10	Means shall be provided for holding the door or cover over a fuseholder in a closed position, and the door or cover shall be tight-fitting.		N/A
7.1.11	A cord-connected appliance that is provided with keyhole slots, notches, hanger holes, or the like, for hanging on a wall shall be constructed in such a manner that the hanging means is not accessible without removing the appliance from the supporting means.		N/A
7.1.12	To determine whether a product complies with the requirement in 7.1.11, any part of the enclosure or barrier that can be removed without the use of tools to gain access to the hanging means is to be removed.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
7.1.13	An opening in the appliance provided for hanging shall be located or guarded so that a nail, hook, or the like does not displace a part that would create a risk of fire or electric shock and does not contact one of the following:		N/A
	a) An uninsulated live metal part;		N/A
	b) Magnet wire;		N/A
	c) Internal wiring;		N/A
	d) Moving parts; or		N/A
	e) Any other part likely to create a risk of fire or electric shock.		N/A
7.2	Polymeric material enclosure		P
7.2.1	A polymeric material used to enclose uninsulated live parts, or enclose live parts having insulation less than 0.028 in (0.71 mm) thick or equivalent, shall comply with the Polymeric Enclosure Tests, Section 66, and shall have a flammability class determined in accordance with the Standard for Tests for Flammability of Plastic Materials for Parts in Devices and Appliances, UL 94, as follows:	Refer to CDF.	P
	a) Class 5VA for a fixed or stationary appliance or for an appliance that is permanently installed;		N/A
	Exception No. 1: A polymeric material classed HB minimum is capable of being used for a stationary appliance intended for household use, and that is cord connected, attended, and intermittent duty when it complies with all the following:		P
	1) All motors shall be provided with motor-overload protection complying with 22.2.2;		N/A
	2) Transformers shall comply with the Standard for Low Voltage Transformers - Part 1: General Requirements, UL 5085-1 and the Standard for Low Voltage Transformers - Part 3: Class 2 and Class 3 Transformers, UL 5085-3; the Standard for Transformers and Motor Transformers for Use in Audio-, Radio-, and Television-Type Appliances, UL 1411; or Class 2 Power Units, UL 1310; and		P
	3) The appliance shall be provided with wheels or casters to facilitate movement from one location to another.		N/A
	Exception No. 2: A polymeric material classed V-2 minimum is capable of being used for a stationary appliance intended for commercial use and that is cord connected, attended, and intermittent duty when it complies with all of the following:		N/A
	a) All motors shall be provided with motor-overload protection complying with 22.2.2;		N/A
	b) Transformers shall comply with the UL 5085-1 and the UL 5085-3; UL 1411; or UL 1310; and		N/A
	c) The appliance shall be provided with wheels or casters to facilitate movement from one location to another.		N/A
	Exception No. 3: In lieu of the required 5VA flame rating, the polymeric material may be subjected to the Flammability - 127 mm (5 inch) Flame Test in accordance with the Standard for Polymeric Materials - Use in Electrical Equipment Evaluations, UL 746C.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	b) Class HB minimum for a portable, attended, intermittent duty, household appliance; or		N/A
	Exception No. 1: Class V-2 minimum for a polymeric material used to enclose heating elements, including heating wire. For a massage type footbath in which the heating function can be operated only when the massage function is operating, Class HB minimum is applicable.		N/A
	Exception No. 2: In lieu of the required HB flame rating, the polymeric material may be subjected to the Flammability - 12 mm Flame Test or the Flammability - 20 mm (3/4 Inch) Flame Test in accordance with the UL 746C.		N/A
	c) Class V-2 minimum for an appliance other than mentioned in (a) and (b).		N/A
	Exception No. 1: In lieu of the required V2 flame rating, the polymeric material may be subjected to the Flammability - 12 mm Flame Test 12 mm or the Flammability - 20 mm (3/4 Inch) Flame Test in accordance with UL 746C.		N/A
	Exception No. 2: For portable, unattended, household use equipment, in lieu of the required V2 flame rating, the polymeric material may be subjected to the Portable Unattended Household Equipment - Alternate Path in accordance with UL 746C.		N/A
7.2.2	The polymeric housing of a component is not considered to be an appliance enclosure unless this part is the sole insulation (excluding air) between a live part and an external surface of the appliance.		P
7.2.3	A polymeric material used to enclose insulated live parts having insulation 0.028 in (0.71 mm) thick minimum or equivalent, internal wiring, or moving parts shall have a flammability class of HB minimum, and shall comply with Mold Stress-Relief Distortion, Section 66.1, and Impact, Section 66.2.		N/A
	Exception: In lieu of the required V2 flame rating, the polymeric material may be subjected to the Flammability - 12 mm Flame Test or the Flammability - 20 mm (3/4 Inch) Flame Test in accordance with UL 746C.		N/A
7.2.4	The volume resistivity of a polymeric material used in an enclosure as specified in 7.2.1, determined in accordance with the Standard for Polymeric Materials - Short Term Property Evaluations, UL 746A, shall not be less than:		N/A
a)	50 MΩ-cm after conditioning for 40 h at 23 ±2°C (73 ±4°F) and 50 ±5 percent relative humidity; and		N/A
b)	10 MΩ-cm after exposure for 96 hours to moist air having a relative humidity of 90 ±5 percent at a temperature of 35 ±2°C (95 ±4°F).		N/A
	Exception No. 1: A polymeric material having a volume resistivity lower than specified in (a) and (b) is capable of being used when the enclosure is determined to be a noncurrent-carrying metal part, and the product complies with Spacings, Section 29, and Spacings to Polymeric Enclosures, Section 29.2.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	Exception No. 2: In lieu of volume resistivity, compliance with the Leakage-Current Test, Section 45 is acceptable. Leakage current measurement shall be taken from accessible surfaces of the polymeric material in question.		N/A
7.2.5	For a portable appliance, a polymeric material used to enclose uninsulated or insulated live parts shall have a hot wire ignition (HWI) performance level category (PLC) not greater than 4 - see Table 15.1 - as a result of the HWI test described in the Standard for Polymeric Materials - Short Term Property Evaluations, UL 746A.		N/A
	Exception No. 1: The material is not required to have a hot wire ignition rating when the live parts, including all internal wiring, are spaced 1/2 in (12.7 mm) or more from the material.		N/A
	Exception No. 2: Materials that do not comply with the minimum HWI requirements specified in Table 15.1 shall comply with the:		N/A
	a) Abnormal Overload Test, Section 69;		N/A
	b) Glow-Wire End-Product Test in accordance with the Standard for Polymeric Materials - Use in Electrical Equipment Evaluations, UL 746C; or		N/A
	c) The Glow-Wire Ignitability Test in the UL 746A as follows:		N/A
	i) The material shall have a glow-wire flammability index (GWFI) rating of at least the required glow-wire temperature specified in the table for Glow-Wire Temperature Requirements Based Upon a Products Functional End-Use Application of UL 746C; or the material shall have a glow-wire ignition temperature (GWIT) rating of at least 25°C higher than the required glow-wire temperature specified in the table for Glow-Wire Temperature Requirements Based Upon a Products Functional End-Use Application in UL 746C; and		N/A
	ii) The GWFI or GWIT rating shall be in a thickness that is within ± 0.1 mm of the relevant end-product part, or if the rating is for a range of thicknesses, the relevant end-product part shall have a thickness within that range.		N/A
7.2.6	For a stationary or fixed appliance, a polymeric material used to enclose uninsulated or insulated live parts shall have a hot wire ignition (HWI) performance level category (PLC) not greater than 3 - see Table 15.1 - as a result of the HWI test, described in the Standard for Polymeric Materials - Short Term Property Evaluations, UL 746A.		N/A
	Exception No. 1: The material is not required to have a hot wire ignition rating when the live parts, including all internal wiring, are spaced 1/2 in (12.7 mm) or more from the material.		N/A
	Exception No. 2: Materials that do not comply with the minimum HWI requirements specified in Table 15.1 shall comply with the:		N/A
	a) Abnormal Overload Test, Section 69;		N/A
	b) Glow-Wire End-Product Test in accordance with the Standard for Polymeric Materials - Use in Electrical Equipment Evaluations, UL 746C; or		N/A
	c) The Glow-Wire Ignitability Test in UL 746A as follows:		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	i) The material shall have a glow-wire flammability index (GWFI) rating of at least the required glow-wire temperature specified in the table for Glow-Wire Temperature Requirements Based Upon a Products Functional End-Use Application of UL 746C; or the material shall have a glow-wire ignition temperature (GWIT) rating of at least 25 C higher than the required glow-wire temperature specified in the table for Glow-Wire Temperature Requirements Based Upon a Products Functional End-Use Application in UL 746C; and		N/A
	ii) The GWFI or GWIT rating shall be in a thickness that is within ± 0.1 mm of the relevant end-product part, or if the rating is for a range of thicknesses, the relevant end-product part shall have a thickness within that range.		N/A
7.3	Motion simulation appliances	Not such type.	N/A
7.3.1	A motion simulation appliance as specified in 4.23 shall comply with the State of California Department of Consumer Affairs Bureau of Home Furnishings and Thermal Insulation, Technical Bulletin 117, Requirements, Test Procedure and Apparatus for Testing the Flame Retardance of Resilient Filling Materials Used in Upholstered Furniture (March 2000) or Technical Bulletin 133, Flammability Test Procedure for Seating Furniture for use in Public Occupancies (January 1991). The furnishing shall be marked in accordance with 81.11.1.		N/A
8	Adhesives Used to Secure Parts		N/A
8.1	An adhesive that is relied upon to reduce a risk of electric shock, fire, or injury to persons shall comply with the requirements for adhesives in the Standard for Polymeric Materials - Use in Electrical Equipment Evaluations, UL 746C.	No such construction.	N/A
8.2	The requirement in 8.1 also applies to an adhesive used to secure a conductive part, including a nameplate, that may, if loosened or dislodged:		N/A
	a) Energize an accessible dead metal part;		N/A
	b) Make a live part accessible;		N/A
	c) Reduce spacings below the minimum acceptable values; or		N/A
	d) Short-circuit live parts.		N/A
9	Mechanical Assembly		P
9.1	An appliance shall be assembled so that it will not be adversely affected by the vibration of intended operation. Brush caps shall be tightly threaded or otherwise constructed to prevent loosening.		P
9.2	A switch other than a through-cord switch, a lampholder, a plug adapter, a motor-attachment plug, or similar component shall be mounted securely and shall be prevented from turning. See 9.4.		N/A
	Exception No. 1: A switch need not be prevented from turning if all four of the following conditions are met:		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	a) The switch is of a plunger or other type that does not tend to rotate when operated. A toggle switch is considered to be subject to forces that tend to turn the switch during intended operation of the switch.		N/A
	b) The means for mounting the switch makes it unlikely that operation of the switch will loosen it.		N/A
	c) The spacings are not reduced below the minimum required values if the switch rotates.		N/A
	d) The intended operation of the switch is by mechanical means rather than by direct contact by persons.		N/A
	Exception No. 2: A lampholder of the type in which the lamp cannot be replaced, such as a neon pilot or indicator light in which the lamp is sealed in a nonremovable jewel, need not be prevented from turning if rotation cannot reduce spacings below the minimum required values.		N/A
9.3	Uninsulated live parts shall be secured to the base or mounting surface so that they will be prevented from turning or shifting in position, if such motion may result in a reduction of spacings below the minimum acceptable values.		N/A
9.4	The means for preventing the turning or shifting mentioned in 9.2 and 9.3 is to consist of more than friction between surfaces - for example, a properly applied lock washer, is acceptable as the means for preventing a small stem-mounted switch or other device having a single-hole mounting means, from turning.		N/A
10	Mechanical Securement of Fluid-Handling Tubing		N/A
10.1	For a massage type footbath, fluid-handling tubing shall be mechanically secured at connections if there is a risk of fire or electric shock should the tubing become disconnected. This mechanical securement shall not rely upon friction between surfaces alone. See the Fluid-Handling Tubing Tests, Section 56.		N/A
11	Protection Against Corrosion		N/A
11.1	Iron and steel parts shall be protected against corrosion by enameling, galvanizing, plating, or other equivalent means, if corrosion of such unprotected parts would be likely to result in a risk of fire, electric shock, or injury to persons.		N/A
	Exception No. 1: Surfaces of sheet-steel and cast-iron parts within an enclosure may not be required to be protected against corrosion if the oxidation of the metal due to the exposure to air and moisture is not likely to be appreciable. The thickness of metal and temperature are also to be considered.		N/A
	Exception No. 2: This requirement does not apply to bearings, laminations, or minor parts of iron or steel, such as washers, screws, and the like.		N/A
11.2	If deterioration of a liquid container provided as a part of an appliance would result in a risk of fire or electric shock, the container shall be of a material that is resistant to corrosion by the liquid intended to be used therein.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
12	Accessibility of Uninsulated Live Parts and Film-Coated Wire		N/A
12.1	To reduce the likelihood of unintentional contact that may involve a risk of electric shock from an uninsulated live part or film-coated wire, an opening in an enclosure shall comply with either (a) or (b):		N/A
	a) For an opening that has a minor dimension (see 9.3) less than 1 in (25.4 mm), such a part or wire shall not be contacted by the probe illustrated in Figure 12.1.		N/A
	b) For an opening that has a minor dimension of 1 in or more, such a part or wire shall be spaced from the opening as specified in 12.5 and Figure 12.2.		N/A
12.2	The probe mentioned in 12.1 and illustrated in Figure 12.1 shall be applied to any depth that the opening will permit, and shall be rotated or angled before, during, and after insertion through the opening to any position that is necessary to examine the enclosure. The probe shall be applied in any possible configuration, and, if necessary, the configuration shall be changed after insertion through the opening.		N/A
12.3	With reference to the requirements in 12.1, the minor dimension of an opening is the diameter of the largest cylindrical probe having a hemispherical tip that can be inserted through the opening.		N/A
12.4	During the examination of an appliance to determine whether it complies with the requirements in 12.1, a part of the enclosure that may be opened or removed by the user without using a tool (to attach an accessory, to make an operating adjustment, or for other reasons) is to be opened or removed.		N/A
12.5	An opening as specified in 12.1(b) and illustrated in Figure 12.2 is acceptable if, within the enclosure, there is no uninsulated live part or film-coated wire:		N/A
	a) Less than X distance from the perimeter of the opening, as well as;		N/A
	b) Within the volume generated by five times the diameter of the largest round rod that can be inserted through the opening, but not less than 4 in (102 mm).		N/A
	In evaluating an opening, any barrier located within the volume usually is ignored unless it intersects the boundaries of the volume in a continuous, closed line.		N/A
12.6	During the examination of an appliance to determine whether it complies with the requirements in 12.1, the materials mentioned in 6.5 shall be removed.		N/A
13	Supply Connections	Powered by Class 2 adapter	P
13.1	Cord-connected appliances		N/A
13.1.1	Cords and plugs		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
13.1.1.1	An appliance intended to be connected to the power-supply circuit by means of a flexible cord shall be provided with a flexible cord and an attachment plug for connection to the supply circuit. The flexible cord may be attached permanently to an appliance or may be in the form of a detachable power-supply cord with appropriate means for connection to the appliance.		N/A
13.1.1.2	The attachment plug of an appliance intended to be connected to a nominal 130 V circuit, and employing devices required to be connected to a specific supply conductor as specified in 21.1, 25.2, and 26.6 shall be a polarized type. The connections to the attachment plug shall be in accordance with Figure 13.1. The polarity identification of the supply cord shall be in accordance with Table 13.1. See 84.3.		N/A
	a In the above illustration, the blade to which the green conductor is connected may have a U-shape instead of a circular cross section.		N/A
	b Signifies a conductor identified in accordance with Table 13.1. The grounded (identified) conductor is the neutral supply conductor.		N/A
13.1.1.3	An appliance that is required to employ a polarized attachment plug as specified in 13.1.1.2, and that is provided with a detachable power supply cord shall also employ an appliance connector of the polarized type.		N/A
13.1.1.4	The ampacity of the cord and the current rating of the attachment plug shall not be less than the maximum normal load current of the appliance. The voltage rating of the cord shall not be less than that of the appliance. The voltage rating of the attachment plug shall be equal to that of the appliance.		N/A
13.1.1.5	The flexible cord shall be as specified in Table 13.2, or shall be of a type at least equally serviceable for the application.		N/A
13.1.1.6	The flexible cord shall not be less than 6 ft. (1.83 m) long.		N/A
13.1.1.7	The length of an attached flexible cord includes the attachment plug. The length of a detachable power supply cord includes the fittings.		N/A
13.1.1.8	A household appliance intended for use with a detachable power supply cord shall not be provided with terminal pins that will accommodate a standard flatiron or appliance plug.		N/A
13.1.1.9	If an appliance can be adapted for use on two or more different values of voltage by field alteration of internal connections, the attachment plug provided with the appliance shall be acceptable for the voltage for which the appliance is connected when shipped from the factory. See 81.1.3.		N/A
13.1.1.10	A massage type footbath shall employ a flexible cord that is attached to the appliance.		N/A
13.1.2	Strain relief		N/A
13.1.2.1	Strain relief shall be provided so that mechanical stress on a flexible cord will not be transmitted to terminals, splices, or interior wiring.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
13.1.2.2	A metal strain-relief clamp or band used with Type SP-2, SPE-2 or lighter general-use rubber-insulated cord shall be provided with auxiliary insulation over the cord for mechanical protection.		N/A
	Exception: The auxiliary insulation may be omitted for Type SV, SVE, SVO, or SVOO cord.		N/A
13.1.2.3	A clamp of any material - metal or otherwise - shall not be used on Type SPT-1, SVT, SVTO, SVTOO, SPT-2, TP, or TPT cord or on cords of similar or lighter construction.		N/A
	Exception No. 1: A clamp is capable of being used on Type SPT-1, SVT, SVTO, SVTOO, SPT-2, TP, or TPT (or similar) cord protected by varnished cloth tubing, phenolic, vulcanized rubber, or the equivalent under the cord grip, when the construction complies with Strain-Relief Clamp Test, Section 61. Thermoplastic tubing shall not be used over thermoplastic cords.		N/A
	Exception No. 2: This requirement does not apply to a clamp that is rated for strain relief for the cord type used in the application.		N/A
13.1.2.4	For types of thermoplastic-insulated cord, heavier than Type SPT-1, SPT-2, SVT, SVTO, or SVTOO, a clamp may be employed and the auxiliary insulation is not required unless it is judged that the clamp may damage the cord insulation.		N/A
13.1.2.5	Means shall be provided to prevent a flexible cord from being pushed into an appliance through a cord-entry hole if such displacement may subject the cord to mechanical damage or to exposure to a temperature higher than that for which the cord is acceptable, or may reduce a spacing, such as to a metal strain-relief clamp, below the minimum acceptable value.		N/A
13.1.2.6	If a knot in a flexible cord serves as strain relief, a surface that the knot may contact shall be free from projections, sharp edges, burrs, fins, and the like, that may cause abrasion of the insulation on the conductors.		N/A
13.1.3	Bushings		N/A
13.1.3.1	At a point where a flexible cord passes through an opening in a wall, barrier, or enclosing case, there shall be a bushing or the equivalent that shall be reliably secured in place, and shall have a smooth, rounded surface against which the cord may bear.		N/A
13.1.3.2	An insulating bushing shall be provided if:		N/A
	a) Type SP-1, SPE-1, SPT-1, SP-2, SPE-2, SPT-2, or other cord lighter than Type SV or SVE is employed;		N/A
	b) The wall or barrier is of metal; or		N/A
	c) The construction is such that the cord may be subjected to strain or motion.		N/A
	Exception: An insulated metal grommet having insulating material that is not less than 1/32 in (0.8 mm) thick and fills completely the space between the grommet and the metal in which it is mounted may be used instead of an insulating bushing.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
13.1.3.3	A cord hole in wood, porcelain, phenolic composition, or other nonconducting material and having a smooth, rounded surface is considered to be equivalent to a bushing.		N/A
13.1.3.4	Ceramic materials and some molded compositions are acceptable for insulating bushings.		N/A
13.1.3.5	A separate bushing shall not be made of wood or of hot-molded shellac-and-tar compositions.		N/A
13.1.3.6	A vulcanized fiber bushing shall not be less than 3/16 in (4.8 mm) thick and shall be formed and secured in place so that it will not be adversely affected by conditions of ordinary moisture.		N/A
13.1.3.7	A separate soft-rubber, neoprene, or polyvinyl chloride bushing shall not be employed in the appliance.		N/A
	Exception No. 1: A separate soft-rubber, neoprene, or polyvinyl chloride bushing may be employed in the frame of a motor or in the enclosure of a capacitor attached to a motor provided that:		N/A
	a) The bushing is not less than 3/64 in (1.2 mm) thick; and		N/A
	b) The bushing is located so that it will not be exposed to oil, grease, oily vapor, or other substances having a deleterious effect on the compound employed.		N/A
	Exception No. 2: A bushing of any of the materials mentioned in 13.1.3.7 may be employed at any point in an appliance if used in conjunction with a type of cord for which an insulating bushing is not required. If a bushing of one of these materials is used anywhere in the appliance, the edges of the hole in which the bushing is mounted are to be smooth and free from burrs, fins, and the like.		N/A
13.1.3.8	At any point in an appliance, a bushing of the same material as, and molded integrally with, the supply cord is acceptable on a Type SP-1 or heavier cord if the built-up section is not less than 1/16 in (1.6 mm) thick at the point where the cord passes through the enclosure.		N/A
13.2	Permanently connected appliances		N/A
13.2.1	General		N/A
13.2.1.1	Except as noted in 13.2.1.2, an appliance intended for permanent connection to the power supply shall have provision for connection of one of the wiring systems that would be acceptable for the appliance.		N/A
13.2.1.2	A stationary appliance may be acceptable if provided with not more than 8 ft (2.44 m) of Type S, SE, SO, SOO, ST, STO, or STOO cord and an attachment plug for supply connection. The investigation of such a feature will include consideration of the utility of the appliance and the necessity of having it readily detachable from its source of supply by means of a plug.		N/A
13.2.2	Terminal compartment		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
13.2.2.1	A terminal box or compartment in which power-supply connections to a permanently connected appliance are to be made shall be located so that the connections may be readily inspected after the appliance is installed as intended.		N/A
13.2.2.2	A terminal compartment intended for connection of a supply raceway shall be attached to the appliance so as to be prevented from turning.		N/A
13.2.2.3	The terminal compartment on a motor that is intended to be connected directly to the supply shall comply with the requirements for terminal compartments in the Standard for Rotating Electric Machines - General Requirements, UL 1004-1.		N/A

13.2.3	Wiring terminals and leads		N/A
13.2.3.1	A permanently connected appliance shall be provided with wiring terminals for the connection of conductors having an ampacity acceptable for the appliance, or the appliance shall be provided with leads for such connection.		N/A
13.2.3.2	A field-wiring terminal is considered to be a terminal to which a wire may be connected in the field, unless the wire and a means of making the connection - a pressure terminal connector, soldering lug, soldered loop, crimped eyelet, and the like - factory-assembled to the wire, are provided as a part of the appliance.		N/A
13.2.3.3	Wiring terminals for the supply conductors - excluding the grounding conductor - shall be provided with a pressure wire connector securely fastened in place, for example, firmly bolted or held by a screw.		N/A
	Exception No. 1: A soldering lug may be used.		N/A
	Exception No. 2: A wire binding screw may be employed at a wiring terminal intended to accommodate a 10 AWG (5.3 mm ²) or smaller conductor if upturned lugs or the equivalent are provided to hold the wire in place.		N/A
13.2.3.4	A wiring terminal shall be prevented from turning.		N/A
13.2.3.5	The free length of a lead inside an outlet box or wiring compartment shall be 6 in (152 mm) or more if the lead is intended for field connection to an external circuit.		N/A
	Exception: The lead may be less than 6 in long if it is evident that the use of a longer lead may result in a risk of fire or electric shock.		N/A
13.2.3.6	A wire-binding screw at a wiring terminal shall not be smaller than No. 10.		N/A
	Exception No. 1: A No. 8 screw may be used at a terminal intended only for the connection of a 14 AWG (2.1 mm ²) conductor.		N/A
	Exception No. 2: A No. 6 screw may be used for the connection of a 16 or 18 AWG (1.3 or 0.8 mm ²) conductor. See 13.2.3.7.		N/A
13.2.3.7	According to the National Electrical Code, ANSI/NFPA 70, 14 AWG (2.1 mm ²) is the smallest conductor that may be used for branch-circuit wiring, and therefore is the smallest conductor that may be anticipated at a terminal for connection of a power-supply wire.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
13.2.3.8	A wire-binding screw shall thread into metal.		N/A
13.2.3.9	A terminal plate tapped for a wire-binding screw shall be of metal not less than 0.050 in (1.27 mm) thick and shall not have less than two full threads in the metal.		N/A
	Exception: An alloy plate may be not less than 0.030 in (0.76 mm) thick if the tapped threads have the necessary mechanical strength.		N/A
13.2.3.1 0	A terminal plate formed from stock having the thickness specified in 13.2.3.9 may have the metal extruded at the tapped hole to provide two full threads for the binding screw.		N/A
13.2.3.1 1	Upturned lugs or a cupped washer shall be capable of retaining a supply conductor of the size specified in 13.2.3.1 under the head of the screw or washer.		N/A
13.2.4	Identified terminals and leads		N/A
13.2.4.1	A permanently connected appliance rated 135 or 135/250 V (3-wire) or less and employing a lampholder of the Edison-screw-shell type, or a single-pole switch or overcurrent-protective device other than an automatic control without a marked off position, shall have one terminal or lead identified for the connection of the grounded conductor of the supply circuit.		N/A
13.2.4.2	A terminal intended for the connection of a grounded supply conductor shall be of or plated with metal that is substantially white in color and shall be readily distinguishable from the other terminals, or proper identification of that terminal shall be clearly shown in some other manner, such as on an attached wiring diagram.		N/A
13.2.4.3	A lead intended for the connection of a grounded power-supply conductor shall be finished white or gray color and shall be readily distinguishable from the other leads.		N/A
14	Current-Carrying Parts		P
14.1	A current-carrying part shall be of silver, copper, a copper alloy, stainless steel, or other similar metal.		P
14.2	Ordinary iron or steel shall not be used as a current-carrying part.		N/A
	Exception: Ordinary iron or steel provided with a corrosion-resistant coating, may be used for a current-carrying part if acceptable in accordance with the requirements in General, Section 5.1, or within a motor or associated governor.		N/A
15	Electrical Insulation		P
15.1	Material for mounting an uninsulated live part shall be porcelain, phenolic composition, or other equivalent material.		P
15.2	Ordinary vulcanized fiber may be used for insulating bushings, washers, separators, and barriers, but not as the sole support for uninsulated live parts where shrinkage, current leakage, or warpage may introduce a risk of fire or electric shock.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
15.3	A polymeric material used to support a live part, in direct contact with a live part, or within 1/32 in (0.8 mm) of a live part shall be rated for use at the operating temperature involved and shall have the following material properties, determined in accordance with the Standard for Polymeric Materials - Short Term Property Evaluations, UL 746A:		N/A
	a) Volume resistivity not less than 50 MΩ-cm,		N/A
	Exception: In lieu of volume resistivity, compliance with the Leakage-Current Test, Section 45 is acceptable. Leakage current measurement shall be taken from accessible surfaces of the polymeric material in question. If the polymeric part in question is not accessible, the leakage current shall be measured in accordance with 45.3 and 45.4.		N/A
	b) Comparative tracking index (CTI) performance level category (PLC) not greater than 4, and		N/A
	c) A PLC for high-current arc ignition (HAI) and hot wire ignition (HWI) not greater than specified in Table 15.1.		N/A
	Exception No. 1: A material with a PLC for HAI greater than specified in Table 15.1 is capable of being used when the spacing over the surface of the material is not less than 1/2 in (12.7 mm):		N/A
	1) Between live parts of opposite polarity,		N/A
	2) Between live parts and grounded noncurrent-carrying metal; and		N/A
	3) Between live parts and exposed noncurrent-carrying metal.		N/A
	Exception No. 2: A material with a PLC for HAI greater than specified in Table 15.1 is capable of being used when the material complies with End-Product Arc Resistance, Section 68.		N/A
	Exception No. 3: Materials that do not comply with the minimum HWI requirements specified in Table 15.1 shall comply with the:		N/A
	a) Abnormal Overload Test, Section 69;		N/A
	b) Glow-Wire End-Product Test in accordance with the Standard for Polymeric Materials - Use in Electrical Equipment Evaluations, UL 746C; or		N/A
	c) Glow-Wire Ignitability Test in UL 746A as follows:		N/A
	i) The material shall have a glow-wire flammability index (GWFI) rating of at least the required glow-wire temperature specified in the table for Glow-Wire Temperature Requirements Based Upon a Products Functional End-Use Application in UL 746C; or the material shall have a glow-wire ignition temperature (GWIT) rating of at least 25 C higher than the required glow-wire temperature specified in the table for Glow-Wire Temperature Requirements Based Upon a Products Functional End-Use Application in UL 746C; and		N/A
	ii) The GWFI or GWIT rating shall be in a thickness that is within ± 0.1 mm of the relevant end-product part, or if the rating is for a range of thicknesses, the relevant end-product part shall have a thickness within that range.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
15.4	A thermoplastic material used to support a live part shall be subjected to the conditioning described in 66.1.2. As a result of the conditioning, the spacings specified in Spacings, Section 29, and Spacings to Polymeric Enclosures, Section 29.2, shall be maintained and live parts shall remain reliably secured in place.		N/A
15.5	A small molded part, such as a brush cap, shall be constructed to have the necessary mechanical strength and rigidity to withstand the stresses of actual service. A brush cap shall be secured or located so that it is protected from mechanical damage that may result during intended use. See also 7.2.2.		N/A

16	Internal Wiring	Evaluated in end product	P
-----------	------------------------	---------------------------------	----------

16.1	Mechanical protection		N/A
16.1.1	Wiring and connection between parts of an appliance shall be protected or enclosed.		N/A
	Exception: A length of flexible interconnecting cord may be employed for external connections if flexibility is essential.		N/A
16.1.2	Wires within an enclosure, a compartment, a raceway, or the like, shall be routed or otherwise protected so that damage to conductor insulation cannot result from contact with any rough, sharp, or moving part.		N/A
16.1.3	A hole through which insulated wires pass in a sheet-metal wall within the overall enclosure of an appliance shall be provided with a smooth, rounded bushing or shall have smooth, rounded surfaces upon which the wires may bear.		N/A
16.1.4	A flexible interconnecting cord as mentioned in the exception to 16.1.1 shall be provided with strain relief and bushings in accordance with the requirements in 13.1.2.1 - 13.1.3.8.		N/A
16.1.5	The strain relief means provided on an interconnected cord or cable shall be tested in accordance with Strain Relief Test, Section 60, except shall withstand for 1 minute a pull of 20 pounds (89 N) applied to the cord.		N/A
	Exception No. 1: This test is to be waived if the cord is routed, protected, or secured such that it cannot be easily grasped or subject to other means of mechanical strain or motion.		N/A
	Exception No. 2: Interconnecting cords or cables in low-voltage secondary circuits need not comply with this requirement unless stress on the cord or cable could cause the internal wiring of the secondary circuits to contact live parts of other circuits that can result in a risk of electric shock.		N/A
16.1.6	If either end of an external interconnecting cable terminates in a connector having one or more exposed contacts, risks of electric shock shall not exist between any contacts, or between earth ground and any contact that is exposed on either the connector or its receptacle while the connector is out of its receptacle. Inclusion of an interlock circuit in the cable to de-energize the exposed contacts whenever an end of the cable is disconnected constitutes compliance with the requirement.		N/A
16.1.7	Insulated wires may be bunched and passed through a single opening in a metal wall within the enclosure of an appliance.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
16.1.8	A conductor utilizing beads for insulation shall not be employed outside an enclosure.		N/A
16.1.9	Internal wiring shall consist of wires of a type or types that are acceptable for the application, when considered with respect to the temperature and voltage to which the wiring is likely to be subjected and with respect to its exposure to oil, grease, or other conditions of service to which it is likely to be subjected.		N/A
16.1.10	With reference to exposure of insulated wiring through an opening in the enclosure of an appliance, the protection of such wiring required by 16.1.1 is considered to exist if, when judged as though it were film-coated wire, the wiring would be acceptable according to 12.1. Internal wiring not so protected may be accepted if it is secured within the enclosure so that it is unlikely to be subjected to stress or mechanical damage.		N/A
16.1.11	Wiring that may be located in proximity to combustible material or may be subjected to mechanical damage shall be in armored cable, rigid metal conduit, electrical metallic tubing, metal raceway, or be otherwise equivalently protected.		N/A
16.2	Splices and connections		N/A
16.2.1	Each splice and connection shall be mechanically secure and shall provide reliable electrical contact. A soldered connection shall be mechanically secured before being soldered if breaking or loosening of the connection may result in a risk of fire or electric shock.		N/A
16.2.2	For an appliance in which vibration is likely to occur - such as a vibrator - the requirement in 16.2.1 will necessitate the use of lock washers or other equivalent means to prevent wire-binding screws and nuts from becoming loosened.		N/A
16.2.3	A splice shall be provided with insulation equivalent to that of the wires involved if permanence of spacing between the splice and other metal parts may not be maintained.		N/A
16.2.4	Aluminum conductors, insulated or uninsulated, used as internal wiring, such as for internal connection between current-carrying parts or as motor windings, shall be terminated by a method acceptable for the combination of metals involved at the point of connection.		N/A
16.2.5	With reference to the requirements in 16.2.4, a wire-binding screw or a pressure wire connector used as a terminating device shall be acceptable for use with aluminum under the conditions involved - for example, temperature, heat cycling, vibration, and the like.		N/A
16.2.6	Insulation consisting of two layers of friction tape, two layers of thermoplastic tape, or of one layer of friction tape on top of one layer of rubber tape, is acceptable on a splice. In determining if splice insulation consisting of coated-fabric, thermoplastic, or other type of tubing is acceptable, consideration is to be given to such factors as its dielectric properties, heat- and moisture-resistant characteristics, and the like. Thermoplastic tape wrapped over a sharp edge is not acceptable.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
16.2.7	If stranded internal wiring is connected to a wire-binding screw, loose strands of wire shall be prevented from contacting other uninsulated live parts that are not always of the same polarity as the wire and from contacting dead metal parts. This may be accomplished by use of pressure terminal connectors, soldering lugs, crimped eyelets, soldering all strands of the wire together, or other reliable means.		N/A
17	Separation of Circuits		N/A
17.1	Conductors of circuits operating at different potentials shall be reliably separated from each other unless the conductors are each provided with insulation rated for the highest potential involved.		N/A
17.2	An insulated conductor shall be retained so that it is not capable of contact with an uninsulated live part of a circuit operating at a different potential.		N/A
18	Capacitors		N/A
18.1	A capacitor provided as a part of a motor and a capacitor connected across the line, such as a capacitor for radio-interference elimination or power-factor correction, shall be housed within an enclosure or container that will protect the plates against mechanical damage and that will prevent the emission of flame or molten material resulting from malfunction or breakdown of the capacitor. The container shall comply with the requirements in 7.1.2 and 7.1.3.		N/A
	Exception: The individual container of a capacitor may be of sheet metal less than specified in 7.1.3 or may be of material other than metal if the capacitor is mounted in an enclosure that houses other parts of the appliance and provided that such housing is acceptable for the enclosure of live parts.		N/A
18.2	If a capacitor that is not a part of a capacitor motor or a capacitor-start motor is connected in an appliance that is intended to be automatically or remotely controlled so that malfunction or breakdown of the capacitor would result in a risk of fire, electric shock, or injury to persons, thermal or overcurrent protection shall be provided in the appliance to prevent such a condition.		N/A
18.3	A capacitor connected from one side of the line to the frame or enclosure of an appliance shall have a capacitance rating of not more than 0.10 mF. See 45.2.		N/A
18.4	An appliance that is intended to be controlled by or operated in conjunction with a capacitor or a capacitor/transformer unit shall be supplied with such capacitor or unit.		N/A
18.5	Under both normal and abnormal conditions of use, a capacitor employing a dielectric medium more combustible than askarel shall not cause a risk of fire or electric shock and shall be protected against expulsion of the dielectric medium.		N/A
19	Grounding		N/A
19.1	General		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
19.1.1	An appliance of one or more of the following types shall have provision for grounding:		N/A
	a) An appliance for use in damp or wet locations and intended to be used in other than residential occupancies;		N/A
	b) An appliance intended to be used on a circuit operating at more than 150 V to ground - see 19.1.3;		N/A
	c) An appliance intended for permanent connection to the electrical supply;		N/A
	d) An appliance intended for outdoor use;		N/A
	e) An appliance intended for use with water or other liquid; and		N/A
	f) treadmills.		N/A
	Exception: A cord-connected appliance other than a treadmill may be provided with an acceptable means of double insulation in accordance with the applicable requirements in the Standard for Double Insulation Systems for Use in Electrical Equipment, UL 1097, in lieu of grounding. See 20.3.		N/A
19.1.2	A product marked as being provided with double insulation shall not be provided with a means for grounding. See 81.1.7.		N/A
19.1.3	With reference to 19.1.1(b), a two-wire appliance intended to operate at a nominal potential of 240 V and any other potential greater than 150 V, is to be provided with means for grounding in accordance with 19.1.5 and 19.1.6 unless the marked rating on the appliance is 120/240 V or the appliance is otherwise marked to indicate that it is to be connected to a circuit operating at 150 V or less to ground.		N/A
19.1.4	If a grounding means is provided, whether required or not, it shall be in accordance with 19.1.5. If the appliance is cord connected, the grounding means shall also comply with the requirements in 19.1.8. All exposed dead metal parts and all dead metal parts within the enclosure that are exposed to contact during any user servicing operation and are likely to become energized shall be reliably connected to the means for grounding.		N/A
19.1.5	The following are acceptable means for grounding:		N/A
	a) In an appliance intended to be permanently connected by a metal-enclosed wiring system, a knockout or equivalent opening in the metal enclosure of the appliance.		N/A
	b) In an appliance intended to be permanently connected by a nonmetal-enclosed wiring system, such as nonmetallic-sheathed cable, an equipment-grounding terminal or lead. See 19.1.10 and 19.1.11.		N/A
	c) In a cord-connected appliance, an equipment-grounding conductor in the cord.		N/A
19.1.6	The grounding conductor of a supply cord shall be secured to the frame or enclosure of the appliance by means of a screw that is not likely to be removed during any servicing operation not involving the power-supply cord, or by other equivalent means. Solder alone shall not be used for securing the grounding conductor. Servicing as mentioned in this paragraph includes repair of the appliance by a qualified service person.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
19.1.7	The grounding conductor of a cord-connected appliance shall be connected to the grounding member of an attachment plug. The grounding member shall be fixed.		N/A
	Exception: The grounding member of the attachment plug on a portable hand-guided or -supported appliance may be of the movable, self-restoring type.		N/A
19.1.8	A separable connection, such as that provided by an attachment plug and a mating connector or receptacle, shall be such that the equipment-grounding connection is made before connection to and broken after disconnection from the supply conductors.		N/A
	Exception: Interlocked plugs, receptacles, and connectors that are not energized when the equipment-grounding connection is made or broken are acceptable.		N/A
19.1.9	If an appliance is intended to be grounded and is provided with means for separate connection to more than one power supply, each such connection shall be provided with a means for grounding.		N/A
19.1.10	A terminal intended solely for the connection of an equipment-grounding conductor shall be capable of securing a conductor of the size necessary for the application. A connection device that depends on solder alone shall not be provided for connecting the equipment-grounding conductor.		N/A
19.1.11	A wire-binding screw or pressure wire connector intended for the connection of an equipment-grounding conductor shall be located so that it is unlikely to be removed during normal servicing of the appliance.		N/A
19.2	Grounding identification		N/A
19.2.1	The surface of the insulation of a grounding conductor of a flexible cord shall be green with or without one or more yellow stripes.		N/A
19.2.2	The surface of an insulated lead intended solely for the connection of an equipment-grounding conductor shall be green with or without one or more yellow stripes, and no other lead shall be so identified.		N/A
19.2.3	A wire-binding screw intended for the connection of an equipment-grounding conductor shall have a green-colored head that is hexagonal or slotted, or both. A pressure wire connector intended for connection of such a conductor shall be plainly identified, such as by being marked "G, "GR , "Ground ," or " Grounding," or by a marking on a wiring diagram provided on the appliance.		N/A
20	Heating Elements and Heating Wire		P
20.1	The voltage rating of a heating element, including an insulated resistance heating wire, employed in an appliance shall not be less than that specified in Table 20.1.		P
20.2	An insulated resistance heating wire shall be suitable for the application and shall also comply with the requirements for Internal Wiring, Section 16. See 16.1.9 for factors to consider in determining the heater wire's suitability for the application.		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
20.3	In a double insulated appliance using insulated resistance heating wire, reinforced insulation is acceptable in place of double insulation for the heating wire's insulation anywhere in the appliance, if the reinforced insulation consists of one or more layers with a total thickness of not less than 3/16 inch (5 mm); this total thickness shall not include the thickness of the heating wire insulation. In a multilayer assembly, contact between adjacent layers is acceptable.		N/A
21	Lampholders		N/A
21.1	The screw shell of an Edison-base lampholder in a permanently connected appliance, or an appliance equipped with a polarized attachment plug shall be connected to the terminal or lead that is intended to be connected to the grounded conductor of the power-supply circuit.		N/A
22	Motors		N/A
22.1	Construction		P
22.1.1	A motor shall be acceptable for the application, and shall be capable of handling the maximum normal load of the appliance as described in Maximum Normal Load, Section 49.2 without creating a risk of fire, electric shock, or injury to persons.		P
22.1.2	A motor winding shall resist the absorption of moisture.		P
22.1.3	With reference to the requirement in 22.1.2, film-coated wire is not required to be additionally treated to resist absorption of moisture, but fiber slot liners, cloth coil wrap, and similar moisture-absorptive materials are to be provided with impregnation or otherwise treated to prevent moisture absorption.		N/A
22.1.4	The diameter of a motor is the diameter of the circle circumscribing the stator frame measured in the plane of the laminations, excluding lugs, fins, boxes, and the like, used solely for motor mounting, cooling, assembly, or connection.		P
22.1.5	A brush-holder assembly shall be constructed so that when a brush is worn out - no longer capable of performing its function - the brush, spring, and other parts of the assembly are retained to the degree necessary to keep:	No such part.	N/A
	a) Accessible dead metal parts from becoming energized; and		N/A
	b) Live parts from becoming accessible.		N/A
22.2	Overload protection		P
22.2.1	An appliance employing a motor shall incorporate thermal or overload protection in accordance with 22.2.2 when it is remotely or automatically controlled, or when the appliance is permanently connected, continuous-duty, manually started, and the motor is rated 1 hp (746 W) output or less.		P
22.2.2	Motor-overload protection required for an appliance shall consist of one of the following:		P
	a) Thermal protection complying with the requirements specified in 5.16.4.1;		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	Exception No. 1: For an appliance that includes a control that positively and reliably limits the length of the time the appliance can operate, the duration of the temperature test and the endurance test, both under locked-rotor conditions, may be less than that specified but shall not be less than the time the appliance can operate.		N/A
	Exception No. 2: A motor intended to move air only by means of an air-moving fan that is integrally attached, keyed, or otherwise fixed to the motor shaft is not required to have running-overload protection.		N/A
	Exception No. 3: A shaded-pole motor with a 2:1 or smaller ratio between locked-rotor and no-load currents and a 1-A or smaller difference between no-load and locked-rotor currents is considered to have acceptable overload protection if it is protected against locked-rotor conditions only.		N/A
	b) Impedance protection complying with the requirements specified in 5.16.4.2 when the motor is tested as used in the appliance under stalled-rotor conditions; or		P
	c) Electronic protection complying with the requirements specified in 5.16.4.3 or 5.16.4.4.		N/A
22.2.3	For a multispeed motor, the requirement in 22.2.1 applies to all speeds at which the motor is intended to operate.		N/A
22.2.4	If a requirement in this standard refers to the horsepower rating of a motor and the motor is not rated in horsepower, use is to be made of the appropriate table of the National Electrical Code, ANSI/NFPA 70, that gives the relationships between horsepower and full-load currents for motors. For a universal motor, the table applying to a single-phase, alternating-current motor is to be used if the appliance is marked for use on alternating current only, otherwise the table applying to direct-current motors is to be used.		N/A
22.2.5	The functioning of a motor-protective device provided as part of an appliance, whether such device is required or not, shall not result in a risk of fire or injury to persons.	Not such type.	N/A
22.3	Insulation systems		N/A
22.3.1	Class A insulation systems shall consist of a combination of magnet wire and major component insulation materials evaluated and found to operate as intended in its end use. Thermoset materials and materials specified in Table 22.1 at the thicknesses specified are permitted to be used without further evaluation.		N/A
22.3.2	For Class A insulation systems employing other materials or thinner materials than those indicated in Table 22.1 or a combination of materials, the materials, whether polymeric or not polymeric (treated cloth, for example), shall comply with the requirements in 22.3.3.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
22.3.3	A polymeric material employed in a Class 105 (A) insulation system that isolates the windings from dead metal parts shall be unfilled or glass-reinforced nylon, polycarbonate, polybutylene terephthalate, polyethylene terephthalate, phenolic or acetal, and shall have a relative or generic thermal index for electrical properties of 105°C minimum. Leads shall be rated 90°C minimum. Motors employing thermoplastic materials shall be subjected to the tests in Thermoplastic Motor Insulation Systems, Section 76.		N/A
	Exception: Other polymeric materials used in a Class 105 (A) insulation system shall comply with the requirements in Thermal Aging Test, Section 76.4.		N/A
22.3.4	Materials used in an insulation system that operates above Class 105 (A) temperatures shall comply with the Standard for Systems of Insulating Materials - General, UL 1446.		N/A
22.3.5	All insulation systems employing integral ground insulation shall comply with the requirements specified in the Standard for Systems of Insulating Materials - General, UL 1446.		N/A
23	Overload- or Thermal-Protective Devices		P
23.1	An overload- or thermal-protective device shall have a current and voltage rating not less than the load that it controls.		P
23.2	A protective device that requires resetting or replacement after it opens shall be readily accessible.		N/A
	Exception: The protective device need not be readily accessible provided:		N/A
	a) The appliance, with the protective device shunted out of the circuit, complies with all applicable requirements in this standard; and		N/A
	b) The presence of the protective device would ordinarily be unknown to the user of the appliance because of its location and the omission of reference to the device in the operating instructions, circuit diagrams, and the like, for the appliance.		N/A
23.3	A protective device shall be wholly inaccessible from outside the appliance without opening a door or cover.		N/A
	Exception: The operating handle of a circuit breaker, the operating button of a manually operable motor protector, and similar parts may project outside the appliance enclosure.		N/A
23.4	A fuseholder shall be constructed and installed so that no uninsulated live part other than the screw shell or clips will be exposed to contact by persons removing or replacing fuses.		N/A
	Exception: The requirement does not apply if the presence of the protective device would ordinarily be unknown to the user of the appliance because of its location and the omission of reference to the device in the operating instructions, circuit diagrams, and the like, for the appliance.		N/A
23.5	The screw shell of a plug-type fuseholder shall be connected toward the load.		N/A
24	Arc-Fault, and Leakage Current Detectors/Interrupters		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
24.1	When required by this end-product standard, or when provided as part of an end-product, an AFCI or LCDI shall comply with Ground-Fault, Arc-Fault, And Leakage Current Detectors/Interrupters, Section 5.11 and 24.2 - 24.4.		N/A
24.2	An arc-fault circuit-interrupter (AFCI) or leakage-current detector-interrupter (LCDI) shall be installed as an integral part of the attachment plug or located in the supply cord within 102 mm (4 inches) of the attachment plug.		N/A
24.3	Arc fault detection testing shall include the applicable UL 1699 tests required for cord-type arc-fault circuit-interrupters.		N/A
	Exception: The carbonized path arc clearing time test is not applicable for LCDIs that are provided with shielded power-supply cords.		N/A
24.4	An AFCI or LCDI provided as part of an appliance intended for outdoor use shall comply with the applicable outdoor use requirements of this end product standard.		N/A
25	Receptacles		N/A
25.1	A 15- or 20-A general-use attachment-plug receptacle in an appliance provided with a means for grounding - a permanently wired appliance or a cord-connected appliance with a grounding conductor in the cord - shall be of the grounding type. The grounding contact of the receptacle shall be electrically connected to dead metal that will be grounded when the appliance is in use.		N/A
25.2	A general purpose receptacle rated for use on a nominal 120 V circuit shall be of a polarized type. The grounded supply conductor shall be connected to the terminal that is substantially white in color or otherwise marked to indicate that it is intended for connection to the grounded supply conductor.		N/A
25.3	Each circuit having an attachment-plug receptacle intended for general use, shall have overcurrent protection of not more than 20 A provided as a part of the appliance if the overcurrent protection of the branch circuit to which the appliance will properly be connected exceeds that acceptable for the receptacles. The overcurrent protection provided shall be of the time-delay type.		N/A
25.4	A fuseholder provided in accordance with 25.3 shall be of Type S construction or shall be of the Edison-base type with a factory-installed nonremovable adapter of Type S construction.		N/A
25.5	The face of a receptacle shall:		N/A
	a) Be flush with or project beyond a nonconductive surrounding surface; or		N/A
	b) Project at least 0.015 in (0.38 mm) beyond a conductive surrounding surface.		N/A
26	Switches and Controls		P
26.1	A switch or other control device shall have a current and voltage rating not less than that of the load that it controls.		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
26.2	With reference to the requirement in 26.1, the current rating of a switch that controls an inductive load other than a motor, such as a transformer or an electric-discharge-lamp ballast, shall not be less than twice the rated full-load current of the transformer or ballast unless the switch has been investigated and found acceptable for the application.		P
26.3	In a permanently connected appliance rated 125 or 125/250 V (3-wire) or less, no switch or overcurrent-protective device of the single-pole type other than an automatic control without a marked off position shall be electrically connected to a terminal or lead intended for connection to the grounded conductor of the supply circuit.		N/A
26.4	A manually operated motor-control switch shall be provided in a cord-connected appliance that employs a motor rated more than 1/3 hp (250 W output).		N/A
26.5	A switch that controls a medium-base lampholder of other than a pilot or indicating light shall be acceptable for use with tungsten-filament lamps.		N/A
26.6	A manually operated, line-connected, switch for appliance on/off operation shall be connected to switch, at minimum the ungrounded conductor of the supply cord.		N/A
27	Controls - End Product Test Parameters		N/A
27.1	General		N/A
27.1.1	Spacings of controls shall comply with the electrical spacing, or clearances and clearance distance requirements of the applicable control standard as determined in Controls, Section 5.6.		N/A
27.1.2	Where reference is made to declared deviation and drift, this indicates the manufacturer's declaration of the control's tolerance before and after certain conditioning tests.		N/A
27.2	Auxiliary controls		N/A
27.2.1	Auxiliary controls shall not introduce a risk of risk of fire, electric shock, or injury to persons.		N/A
27.2.2	Auxiliary controls shall comply with the requirements of this end product standard.		N/A
	Exception: An auxiliary control that complies with a component standard(s) specified in Controls, Section 5.6 is considered to comply with this requirement.		N/A
27.3	Operating controls (regulating controls)		N/A
27.3.1	The following test parameters shall be among the items considered when judging the acceptability of an operating control investigated in accordance with the Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1:		N/A
	a) Control action Types 1 or 2;		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	b) Unless otherwise specified in this end product standard, manual and automatic controls shall be tested for 6,000 cycles with under maximum normal load conditions, and 50 cycles under overload conditions. See 40.1.5;		N/A
	c) Installation class 2 in accordance with the Standard for Electromagnetic Compatibility (EMC) - Part 4-5: Testing and Measurement Techniques - Surge Immunity Test, IEC 61000-4-5;		N/A
	d) For the applicable Overvoltage Category, see Table 27.1;		N/A
	e) For the applicable Material Group, see Table 27.2; and		N/A
	f) For the applicable Pollution Degree, see Table 27.3.		N/A
27.3.2	The following test requirements shall be among the items considered when judging the acceptability of an operating control investigated in accordance with other than the Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1:		N/A
	a) Control action Types 1 or 2;		N/A
	b) Unless otherwise specified in this standard, manual and automatic controls shall be tested for 6,000 cycles with under maximum normal load conditions, and 50 cycles under overload conditions. See 40.1.5;		N/A
	c) For the applicable Overvoltage Category, see Table 27.1;		N/A
	d) For the applicable Material Group, see Table 27.2; and		N/A
	e) For the applicable Pollution Degree, see Table 27.3.		N/A
	Table 27.2		N/A
	Material group		N/A
27.4	Protective controls (limiting controls)		N/A
27.4.1	An electronic control that performs a protective function shall comply with the requirements in Controls, Section 5.6 while tested in accordance with the parameters in this section. Examples of protective controls are: a control used to sense abnormal temperatures of components within the appliance; an interlock function to de-energize a motor; temperature protection of the motor due to locked rotor, running overload, loss of phase; or other function intended to reduce the risk of fire, electric shock, or injury to persons.	No such controls used as electronic protective device.	N/A
27.4.2	The following test parameters shall be among the items considered when judging the acceptability of an electronic protective control investigated in accordance with the Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1:		N/A
	a) Failure-Mode and Effect Analysis (FMEA) or equivalent risk analysis method;		N/A
	b) Power supply voltage dips, variation and interruptions within a temperature range of 10°C and the maximum ambient temperature determined by conducting the Temperature Test, Section 49;		N/A
	c) Surge immunity test - installation class 3 shall be used;		N/A
	d) Electrical fast transient/burst test, a test level 3 shall be used;		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	e) Electrostatic Discharge Test; and		N/A
	f) Radio-frequency electromagnetic field immunity:		N/A
	1) Immunity to conducted disturbances, when applicable, test level 3 shall be used; and		N/A
	2) Immunity to radiated electromagnetic fields, field strength of 3 V/m shall be used.		N/A
	g) Thermal Cycling Test in UL 60730-1 shall be conducted at ambient temperatures of 10.0+2°C and the maximum ambient temperature determined by conducting the Temperature Test, Section 49. The test shall be conducted for 14 days.		N/A
	h) Overload shall be conducted based on the maximum declared ambient temperature (T _{max}) or as determined by conducting the Temperature Test, Section 49.		N/A
	i) If software is relied upon as part of the protective electronic control, it shall be evaluated as software class B.		N/A
27.4.3	The test parameters and conditions used in the investigation of the circuit specified in 27.4.1 shall be as specified in the Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991, in accordance with the following test parameters:		N/A
	a) With regard to electrical supervision of critical components, for attended appliances, a motor operated system becoming permanently inoperative with respect to movement of an exposed portion of the appliance complies with the requirements for trouble indication. For unattended appliances, electrical supervision of critical components may not rely on trouble indication.		N/A
	b) A field strength of 3 V per meter is to be used for the Radiated EMI Test.		N/A
	c) The Composite Operational and Cycling Test is to be conducted for 14 days at temperature extremes of 0°C (32°F) and 70°C (158°F).		N/A
	d) The Humidity Class is to be based on the appliance's intended end use and is to be used for the Humidity Test.		N/A
	e) A vibration level of 5 g is to be used for the Vibration Test.		N/A
	f) The computational investigation is not applicable to appliances covered by this end product standard.		N/A
	g) For the Demonstrated Method Test, the multiplier for the test acceleration factor is to be 576.30 for intermittent use appliances, or 5763.00 for continuous use appliances. The test acceleration factor equation is to be based on a 25°C use ambient.		N/A
	h) The Endurance Test is to be conducted concurrently with the Operational Test. The control shall perform its intended function while being conditioned for 14 days in an ambient air temperature of 60°C (140°F), or 10°C (18°F) greater than the operating temperature of the control, whichever is higher. During the test, the control is to be operated in a manner representing normal use.		N/A
	i) For the Electrical Fast Transient Burst Test, test level 1 is to be used.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	j) Conduct a failure-mode and effect analysis (FMEA).		N/A
	k) If software is relied upon as part of the protective electronic control, it shall be evaluated as software class 1 in accordance with the Standard for Software in Programmable Components, UL 1998.		N/A
27.4.4	Unless otherwise specified in this end product standard, protective controls shall be evaluated for 100,000 cycles for Type 2 devices and 6,000 cycles for Type 1 devices with rated current. See 40.2.3, Overload, Section 59.3, and Endurance, Section 59.4.		N/A
27.5	Controls using a temperature sensing device		N/A
27.5.1	A temperature sensing positive temperature coefficient (PTC) or negative temperature coefficient (NTC) thermistor, that performs the same function as an operating or protective control, shall be tested using the following number of cycles when testing a sensing device in accordance with the Endurance Test:		N/A
	a) For a device employed as an operating device - 6000 cycles;		N/A
	b) For a device employed as a protective device - 100,000 cycles; and		N/A
	c) For a device employed as a combination operating and protective device - 100,000 cycles.		N/A
28	Attachments		N/A
28.1	Functional attachments that are made available or recommended by the manufacturer for use with the basic appliance shall be included in the evaluation of the appliance. Unless recommended by the manufacturer, not more than one attachment shall be evaluated at a time with the appliance.		N/A
28.2	The literature accompanying a package containing a basic appliance and attachments intended to be marketed as a complete unit shall indicate what attachments are intended for use with the basic appliance.		N/A
28.3	If an attachment is packaged and marketed separately from the basic appliance and recommended for use with it by the manufacturer of the basic appliance, it shall have an assigned catalog number (or equivalent). Also, information packaged with the basic appliance shall identify by catalog number, the attachments which are intended for use with the basic appliance or the catalog number of the basic appliance with which the attachment is intended to be used shall appear in at least one of the following locations:		N/A
	a) On the attachment;		N/A
	b) On the package housing the attachment; or		N/A
	c) In information furnished with the attachment.		N/A
29	Spacings	Powered by class 2 adapter	N/A
29.1	General		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
29.1.1	Other than at field-wiring terminals, the spacing between uninsulated live parts of opposite polarity and between an uninsulated live part and a dead metal part that is exposed to contact by persons or that may be grounded shall not be less than the value specified in Table 29.1.		N/A
	Exception No. 1: The inherent spacings of a component of the appliance, such as a snap switch, are judged on the basis of the requirements for the component in question.		N/A
	Exception No. 2: An isolated dead metal part may be spaced as provided in 29.1.5.		N/A
29.1.2	Spacings in a motor shall comply with the spacing requirements in the Standard for Rotating Electric Machines - General Requirements, UL 1004-1.		N/A
29.1.3	If an uninsulated live part is not rigidly fixed in position by means other than friction between surfaces, or if a movable dead metal part is in proximity to an uninsulated live part, the construction shall be such that the required minimum spacing will be maintained.		N/A
29.1.4	In an appliance incorporating two or more motors of different horsepower rating, the spacings in the appliance are to be judged on the basis of the rating of the largest motor in the appliance.		N/A
29.1.5	If an isolated dead metal part is interposed between or is in close proximity:		N/A
	a) To live parts of opposite polarity;		N/A
	b) To a live part and an exposed dead metal part; or		N/A
	c) To a live part and a dead metal part that may be grounded;		N/A
	the spacing may be not less than 3/64 in (1.2 mm) between the isolated dead metal part and any one of the other parts previously mentioned, provided the total spacing between the isolated dead metal part and the two other parts is not less than the value specified in Table 29.1.		N/A
29.1.6	An insulating lining or barrier of vulcanized fiber or similar materials employed where spacing would otherwise be insufficient shall not be less than 1/32 in (0.8 mm) thick, and shall be so located or of such material that it will not be adversely affected by arcing, except that vulcanized fiber not less than 1/64 in (0.4 mm) thick may be used in conjunction with an air spacing of not less than 50 percent of the spacing required for air alone.		N/A
	Exception: Thinner insulating material may be used, if upon investigation, it is found to be acceptable for the application.		N/A
29.1.7	All uninsulated live parts connected to different line- or low-voltage circuits shall be spaced from one another as though they were parts of opposite polarity, in accordance with the requirements in 29.1.1 and 29.1.9 and shall be judged on the basis of the highest voltage involved.		N/A
29.1.8	The spacing between uninsulated live parts of opposite polarity and between such parts and dead metal parts that are exposed to contact by persons or are intended to be grounded in service is not specified for parts of low-voltage circuits.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
29.1.9	The spacing between wiring terminals of opposite polarity, and the spacing between a wiring terminal and any other uninsulated metal part - dead or live - not of the same polarity, shall not be less than that specified in Table 29.2. See 13.2.3.2.		N/A
29.1.10	At terminal screws and studs to which connection may be made in the field by means of the wire connectors, eyelets, and the like, as described in 13.2.3.2, spacings shall not be less than those specified in Table 29.1 when such connectors, eyelets, and the like, are in such position that minimum spacings - opposite polarity and to dead metal - exist.		N/A
29.2	Spacings to polymeric enclosures		N/A
29.2.1	The spacing between a polymeric enclosure and a nonarcing uninsulated live part (a bus bar, a connecting strap, a terminal, or similar part) shall not be less than 1/32 in (0.8 mm).		N/A
	Exception: A spacing less than 1/32 in is capable of being used when the enclosure material complies with the requirements for support of a live part described in 15.3.		N/A
29.2.2	The spacing between a polymeric enclosure and an arching part (at a commutator, unenclosed switch contacts, or similar part) shall not be less than 1/2 in (12.7 mm).		N/A
	Exception No. 1: A spacing less than 1/2 in (12.7 mm) but not less than 1/32 in (0.8 mm) is acceptable when the material has a PLC for high-current arc ignition (HAI) not greater than specified in Table 15.1.		N/A
	Exception No. 2: A spacing is not required when the material complies with the requirements for support of a live part prescribed in 15.3.		N/A
29.2.3	With reference to 29.2.2, the spacing is to be measured from the source of the arc - that is, from the interface of the brush and the commutator, from the interface of the switch contacts, or similar parts.		N/A
29.3	Spacings on printed wiring boards		N/A
29.3.1	As an alternative to the spacing requirements of Table 29.1, the spacing requirements in the Standard for Insulation Coordination Including Clearances and Creepage Distances for Electrical Equipment, UL 840, may be applied. The spacing requirements in UL 840 shall not be used for field wiring terminals and spacings to a dead metal enclosure.		N/A
29.3.2	The following end use factors from this end product standard shall be applied in the evaluation of alternative spacings:		N/A
	a) For the applicable Overvoltage Category, see Table 27.1;		N/A
	b) For the applicable Material Group, see Table 27.2; and		N/A
	c) For the applicable Pollution Degree, see Table 27.3.		N/A
29.3.4	In order to apply Clearance B (controlled overvoltage) clearances, control of overvoltage shall be achieved by providing an overvoltage device or system as an integral part of the product. This voltage limiting device or system shall comply with the Standard for Surge Protective Devices, UL 1449.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
29.3.5	All printed wiring boards are identified as having a minimum comparative tracking index (CTI) of 100 without further investigation, for evaluation to Standard for Insulation Coordination Including Clearances and Creepage Distances for Electrical Equipment, UL 840.		N/A
29.4	Spacings in Class 2 circuits		N/A
29.4.1	Deleted		N/A
30	Class 2 Power Units or Power Supplies		N/A
30.1	Deleted		N/A
31	Primary Lithium Batteries		N/A
31.1	Deleted		N/A
	PROTECTION AGAINST INJURY TO PERSONS		P
32	General		P
32.1	If the operation and maintenance of an appliance by the user involves the risk of injury to persons, means shall be provided to reduce the risk.		P
32.2	When judging an appliance with respect to the requirement in 32.1, consideration shall be given to reasonably foreseeable misuse of the appliance.		P
32.3	A functional attachment that is made available or recommended by the manufacturer for use with the basic appliance shall be included in the evaluation of the appliance. Unless the manufacturer recommends the use of two or more attachments at the same time, only one attachment at a time is to be evaluated with the appliance.		N/A
32.4	The adequacy of a guard, a release, an interlock, or the like, and whether such a device is required are to be determined from an investigation of the complete appliance, its operating characteristics, and the likelihood of a risk of injury to persons resulting from a cause other than gross negligence. The investigation is to include consideration of the results of breakdown or malfunction of any one component, but not more than one component at a time, unless one event contributes to another. If the investigation shows that breakdown or malfunction of a particular component can result in a risk of injury to persons, that component is to be investigated for reliability.		N/A
32.5	Specific constructions, tests, markings, guards, and the like, are detailed for some common constructions. Specific features and appliances not covered herein are to be given appropriate consideration.		N/A
33	Sharp Edges		P
33.1	An enclosure, a frame, a guard, a handle, or the like, shall not be sufficiently sharp to constitute a risk of injury to persons in normal maintenance and use.		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
34	Enclosures and Guards		P
34.1	The rotor of a motor, a pulley, a belt, a gear, a fan, or other moving part that could cause injury to persons shall be enclosed or provided with other means to reduce the likelihood of unintentional contact therewith, and such a part shall not be contacted by the probe illustrated in Figure 12.1.		P
	Exception: A part or portion of a part that is necessarily exposed to perform the work function need not be enclosed but, when necessary, guarding shall be provided. See 34.4.		N/A
34.2	During the examination of an appliance to determine whether it complies with the requirements in 34.1, a part of the enclosure that may be removed without the use of a tool (to attach an accessory, to make an operating adjustment, or for other reasons) is to be opened or removed.		N/A
	Exception: A part need not be opened or removed provided it is marked in accordance with 39.6.		N/A
34.3	Among the factors to be considered in judging the acceptability of an exposed moving part are:		N/A
	a) The degree of exposure necessary to perform the intended function;		N/A
	b) The sharpness of the moving part;		N/A
	c) The likelihood of unintentional contact therewith;		N/A
	d) The speed of the moving part; and		N/A
	e) The likelihood that a part of the body could be endangered by the moving part or that clothing could be entangled by the moving part, resulting in a risk of injury to persons.		N/A
	These factors are to be considered with respect to both intended operation of the appliance and any reasonably foreseeable misuse.		N/A
34.4	Some guards are required to be of the self-restoring type. Other features of guards that are to be considered include:		N/A
	a) Removability without the use of tools;		N/A
	b) Removability for servicing;		N/A
	c) Strength and rigidity;		N/A
	d) Completeness;		N/A
	e) Creation of additional risk of injury to persons, such as pinch points, and the necessity for additional handling because of the increased need for servicing, such as for cleaning, unjamming, and the like; and		N/A
	f) Usage - household or commercial.		N/A
34.5	An enclosure or guard over a rotating part shall retain a part that, because of breakage or other reasons, may become loose or may separate from a rotating part, and retain a foreign object that may be struck and propelled by the rotating part.		N/A
34.6	If complete guarding of a moving part that could obviously cause injury to persons would defeat the utility of an appliance, a control, such as a momentary contact switch, shall be provided, and an appropriate marking shall be provided in the instruction manual warning the user of the potential risk.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
34.7	The rotating massage heads of a shiatsu-type massager shall be such that the distance between the heads is 2 in (50.8 mm) or more at any position of rotation.		N/A
	Exception No. 1: A distance between the heads less than 2 in (50.8 mm) complies with the requirement when a guard is provided that does not allow body parts to contact the massage heads when the massage heads are less than 2 in apart. The guard shall extend above the plane of the point where the heads come closest together.		N/A
	Exception No. 2: A distance between the heads less than 2 in (50.8 mm) complies with the requirement when the massager complies with Shiatsu-Type Massager Entrapment Test, Section 70.		N/A
35	Materials		P
35.1	The material of a part, such as an enclosure, a frame, a guard, or the like, the breakage or deterioration of which might result in a risk of injury to persons, shall have such properties as to meet the demand of expected loading conditions.		P
35.2	The requirement in 35.1 applies to those portions of a part adjacent to a moving part considered to involve a risk of injury to persons.		P
36	Rotating or Moving Members	Evaluated in end product	N/A
36.1	A rotating or moving part that, if it should become disengaged, could create a risk of injury to persons shall be provided with a means to retain the part in place under conditions of use.		N/A
36.2	A rotating member, the breakage of which might create a risk of injury to persons, shall be constructed so as to reduce the likelihood of its breakage, or the release or loosening of a part that could become a risk of injury to persons.		N/A
36.3	To determine whether an appliance employing a series motor complies with the requirement in 36.2, it is to be tested as described in 36.4. Parts that can become a risk of injury to persons shall not work loose as a result of the test.		N/A
36.4	For the test discussed in 36.3, an appliance employing a series motor is to be operated for 1 minute at the no-load speed resulting from application of 1.3 times rated voltage. An appliance in which the rotating load may be varied is to be tested for each condition of loading that can occur.		N/A
37	Switches, Controls, and Interlocks		N/A
37.1	An appliance shall be constructed so as to reduce the likelihood of unexpected operation of any parts capable of causing injury to persons.		N/A
37.2	Each function of a multiple-function appliance is to be taken into consideration in determining whether the appliance complies with the requirement in 37.1.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
37.3	If, when energized, an appliance has a moving part that may cause injury to persons, a motor control switch, other than a momentary-contact switch, on the appliance shall have a plainly identified "OFF" position, or "ON" and "OFF" positions, and be marked in accordance with 37.4 or 37.5, as applicable. If the international symbols "I" and "O" are used, the significance of these symbols shall be explained in the instruction manual provided with the product (see 82.8).		N/A
37.4	With reference to the requirement in 37.3, the "OFF" position of the switch shall be marked with either one or both of the following:		N/A
	a) The word "OFF," or its equivalent (for example, "STOP"); or		N/A
	b) The international symbol "O".		N/A
37.5	With reference to the requirement in 37.3, the "ON" position of the switch, when identified, shall be marked with one or both of the following, as determined by the marking of the "OFF" position of the switch:		N/A
	a) The word "ON," or its equivalent (for example, "START") when the "OFF" position of the switch is marked with the word "OFF," or its equivalent (for example, "STOP") or "OFF/RESET"; or		N/A
	b) The international symbol "I," when the "OFF" position of the switch is marked with the international symbol "O".		N/A
37.6	If unintentional operation of a switch can result in a risk of injury to persons, the actuator of the switch shall be located or guarded so that such operation is unlikely.		N/A
37.7	The actuator of a switch may be guarded by recessing, ribs, barriers, or the like.		N/A
37.8	A floor- or ground-supported appliance that can travel or rotate to an extent that could result in a risk of injury to persons if left unattended shall be provided with a momentary contact switch that cannot be locked in the on position.		N/A
37.9	A device that automatically starts an appliance, such as a timer, an automatically reset overload-protective device, or the like, shall not be employed unless it can be demonstrated that automatic starting will not result in a risk of injury to persons.	Not such type.	N/A
37.10	The requirement in 37.9 will necessitate the use of an interlock if moving parts or the like could result in a risk of injury to persons upon the automatic starting or restarting of the motor.		N/A
37.11	The actuator of an interlock switch shall be located so that unintentional operation is unlikely. See 37.7.		N/A
37.12	Operation of an interlock during intended use shall not inconvenience the operator so as to encourage deliberate defeat of the interlock.		N/A
37.13	An interlock shall not be capable of being defeated by materials that could accumulate in intended use.		N/A
37.14	An interlock shall be such that it cannot be defeated readily:		N/A
	a) Without damaging the appliance;		N/A
	b) Without making wiring connections or alterations; or		N/A
	c) By using materials that are readily available.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
37.15	If an interlock is actuated by movement of a guard, the arrangement shall be such that the guard is in place when the interlock is in the position that permits operation of the parts being guarded. With the guard removed, the interlock shall comply with the requirement in 37.11.		N/A
38	Stability Test	Evaluated in end product	N/A
38.1	If a portable appliance overturns when tested as described in 38.2 and 38.4, a risk of injury to persons shall not result.		N/A
	Exception: An appliance that is completely hand supported in intended use need not be tested.		N/A
38.2	The appliance is not to be energized during the stability test. The test is to be conducted under conditions most likely to cause the appliance to overturn. The following conditions are to be such as to result in the least stability:		N/A
	a) The position of all doors, drawers, casters, and other movable or adjustable parts, including that of the supply cord resting on the surface supporting the appliance;		N/A
	b) Connection of or omission of any attachment made available by or recommended by the manufacturer;		N/A
	c) Provision of or omission of any normal load if the appliance is intended to contain a liquid or other mechanical load; and		N/A
	d) Direction in which the appliance is tipped or the supporting surface is inclined. See 38.3.		N/A
38.3	In conducting the stability test, the appliance is to be:		N/A
	a) Placed on a plane inclined at an angle of 10 degrees from the horizontal; or		N/A
	b) Tipped through an angle of 10 degrees from an at rest position on a horizontal plane.		N/A
38.4	With reference to the requirement in 38.3(b), for an appliance that is constructed so that while being tipped through an angle of 10 degrees a part or surface of the appliance not normally in contact with the horizontal supporting surface touches the supporting surface before the appliance has been tipped through an angle of 10 degrees, the tipping is to be continued until the surface or plane of the surface of the appliance originally in contact with the horizontal supporting surface is at an angle of 10 degrees from the horizontal supporting surface.		N/A
38.5	With reference to the requirement in 38.2(c), a massage type footbath shall be tested with water at the maximum fill line, and with the water vessel empty.		N/A
38.6	An appliance not intended to move from its de-energized position to perform its intended function that, when operated, moves from its de-energized position shall be provided with an anchoring means.		N/A
39	Markings		P
39.1	An appliance having a hidden or unexpected risk of injury to persons shall be marked to inform the user of the risk.		P
39.2	A cautionary marking shall be permanent and legible and shall be located on a permanent part of the appliance.		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
39.3	A cautionary marking intended to instruct the operator, shall be legible and visible from the position normally assumed by the operator when starting the appliance or from the position normally assumed for the specific operation involved. Other such markings for servicing or making settings and adjustments shall be legible and visible to the individual when such work is being accomplished.		P
39.4	A marking intended to inform the user of a risk of injury to persons shall be prefixed by a signal word "CAUTION," "WARNING," or "DANGER." The marking shall be in letters not less than 3/32 in (2.4 mm) high. The signal word shall be more prominent than any other required marking on the appliance.		P
39.5	If, when energized, an appliance has a moving part that may cause injury to persons, a switch that controls the motor that drives the part shall have a plainly marked off position.		P
39.6	A part of an enclosure as described in the exception to 34.2 and 42.1.9 shall be marked to indicate that such servicing is to be done with the appliance disconnected from the supply circuit.		N/A
40	Treadmills		N/A
40.1	Switches and controls		N/A
40.1.1	In addition to the manually operated motor control switch required by 26.4, a deliberate user action, such as a push button switch on the control panel, shall be required to initiate movement of the treadmill belt such that there is no unexpected operation. The user interface shall also give an indication that the treadmill is about to start and starting speed and acceleration shall be in accordance with 40.3.2. The motor control switch specified in 26.4 is not required to be on the control panel.		N/A
40.1.2	The control panel for the operation of the treadmill shall be readily accessible to the user. The control panel shall be provided with an obvious and readily accessible switch that is used to stop the treadmill belt.		N/A
40.1.3	If the treadmill is provided with a motor-operated incline system, the motor control switch required by 26.4 shall also stop the motion of the incline system.		N/A
40.1.4.	The switch described in 40.1.2 shall be plainly marked "OFF," "STOP," or with international symbols "O" and "I," in accordance with 37.4 or 37.5, as applicable. If the international symbols "O" and "I" are used, the significance of these symbols O and I shall be explained in the instruction manual provided with the product (see 82.8).		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
40.1.5	The switch described in 40.1.2 that controls the "OFF," "STOP," "PAUSE," or "END" functions of the treadmill belt shall be suitably rated with respect to voltage (ac or dc), current, and the load being switched (such as a motor load, a relay coil load, low voltage inductive, or low voltage resistive load). The switch shall also be suitable for 6000 cycles of operation for household-use treadmills, and 50,000 cycles of operation for commercial-use treadmills, or be tested in accordance with 70.1.		N/A
40.1.6	If more than one switch or switching device is used to control the "OFF," "STOP," "PAUSE," or "END," functions then each switch or device shall comply with 40.1.2 - 40.1.5.		N/A
40.1.7	The motor or speed control that controls the speed and acceleration of the treadmill belt shall be suitably rated for the application, and shall comply with one of the following:		N/A
	a) A control that automatically controls the speed of the treadmill belt (such as during a pre-set program in which the speed of the belt automatically increases or decreases), shall comply with the applicable requirements in the Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1; or		N/A
	b) A control that requires deliberate user action to change the speed of the treadmill belt (such as a push button on the control panel) shall comply with Abnormal Operation - Electronic Component Test, Section 40.4, or with the applicable requirements in the Standard for Solid-State Controls for Appliances, UL 244A.		N/A
	Exception: A motor or speed control that is simple in design (for example, the control components consist of a triac and resistors, and does not include an integrated circuit) need only be subjected to the applicable requirements of this end-product standard; see Abnormal Operation - Electronic Component Test, Section 40.4 and Abnormal-Operations Test, Section 64.		N/A
40.2	Emergency stop switch		N/A
40.2.1	A treadmill shall be provided with an emergency stop switch. This switch may be either a push-button type or pull-cord type.		N/A
40.2.2	The actuator of a push-button type switch shall be either the palm or mushroom-head design, and shall be a color that contrasts with its background. The safety key, or the like of a pull-cord switch, shall be a color that contrasts with its background.		N/A
40.2.3	The switch shall be suitably rated with respect to voltage (ac or dc), current, and the load being switched (such as a motor load, a relay coil load, low voltage inductive, or low voltage resistive load), and shall be suitable for 6000 cycles of operation for household-use treadmills, or 50,000 cycles for commercial-use treadmills, or tested in accordance with the Emergency Stop Switch Endurance Test, Section 71.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
40.2.4	For a pull-cord type switch, the entire pull-cord system shall be suitable for the number of cycles of operation as indicated in 40.2.3 when tested in accordance with the Emergency Stop Switch Endurance Test, Section 71. The pull-cord system may be comprised of a safety key, cord, strap, mechanical connections, and the like.		N/A
40.2.5	When the emergency stop switch is actuated, the power to the belt motor (and to the motor-operated incline system, if applicable) shall be directly disconnected without using the treadmill's software, and the treadmill belt shall be decelerated until it comes to a complete stop. Power to the user interface or display need not be disconnected when the emergency switch is actuated.		N/A
40.2.6	After actuation of the emergency stop switch, it shall not be possible to restart the treadmill until the user manually resets the emergency stop switch.		N/A
40.3	Treadmill belt speed and acceleration rates		N/A
40.3.1	The initial starting speed of the treadmill belt shall not exceed 1.5 mph (2.4 kph) when tested in accordance with Maximum Initial Starting Speed, Section 72.1.		N/A
40.3.2	The acceleration of the belt shall not exceed 2.0 mph/s (3.2 kph/s) with the treadmill operating at no-load, when tested in accordance with Maximum Acceleration, Section 72.2.		N/A
40.3.3	The treadmill design shall comply with the initial starting speed, and acceleration rates in the as-received condition, and after the Abnormal Operation - Electronic Components Test, Section 40.4).		N/A
40.4	Abnormal operation - electronic components test		N/A
40.4.1	A treadmill that uses electronic controls and circuit components in its design (such as a resistor, capacitor, solid state device, and the like), the failure of which may increase the likelihood of unexpected operation, or an unexpected increase in the speed of the treadmill belt at a rate exceeding the acceleration rate specified in 40.3.2, shall be subjected to the Abnormal Operation - Electronic Components Test specified in Electronic Components, Section 64.2.		N/A
40.4.2	A treadmill provided with an automatic speed control shall comply with 40.1.7(a).		N/A
40.4.3	Single-fault analysis of the motor speed control circuit and testing on each critical component located in the speed control circuit shall be conducted, as applicable.		N/A
40.4.4	As a result of the testing, the treadmill shall:		N/A
	a) Not unexpectedly operate; and		N/A
	b) Comply with the treadmill belt speed and acceleration rate requirements in Treadmill Belt Speed And Acceleration Rates, Section 40.3.		N/A
41	Inversion Tables		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
41.1	General		N/A
41.1.1	A non-motorized inversion table shall comply with the applicable requirements in Sections 1 - 11, 28, 32 - 40, and Sections 81 - 85, as applicable.		N/A
41.1.2	An inversion table shall be designed and rated for a maximum body weight (load) not to exceed 300 lbs (135 kg).		N/A
41.1.3	A motorized inversion table shall be provided with a means for the user to return to the full upright position (table in vertical position with foot support in the down-most position) in the event of a power loss.		N/A
41.1.4	When conducting the mechanical tests for inversion tables in accordance with Sections 41.2 - 41.6, consideration shall be given to the various adjustments, configurations, and settings that can be made and as referenced in the markings or instructions. If a table is rated and marked for different weight loads based on different settings or adjustments of the table, these tests shall be conducted at the various settings taking into consideration the rated loads, to evaluate the most unfavorable conditions.		N/A
41.2	Mechanical strength - static load		N/A
41.2.1	A sample shall be placed on a smooth level surface and subjected to a test load equal to four times the maximum rated body weight of the inversion table. The full test load shall remain on the sample for a period of 1 minute. The inversion table shall be in equilibrium within 1 minute after the application of the full test load. As a result of the testing, there shall be no mechanical or structural damage to parts of the inversion table that would increase the risk of personal injury. After the testing, the sample shall be visually examined for any mechanical or structural damage (such as cracks on supporting members, loosening of parts, permanent deformation, grinding of rotating parts, misalignment of the tables' rotation within the frame, outward spreading of the frame, tipping of the table, etc.).		N/A
41.2.2	The test described in 41.2.1 shall be conducted on a sample of the complete inversion table. The sample shall be positioned horizontally and, as applicable in the least favorable position in accordance with the use instructions, and then loaded with the test load. The test load shall be distributed evenly over the supporting surface, including any side rails. The test load shall be applied gradually to the table (or bench or mat) while it is in the horizontal position until the required test load is in place.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
41.2.3	The test described in 41.2.1 shall be repeated on the ankle clamping system. Testing shall be conducted on a sample with the table in its full inverted position (table in vertical position with ankle clamps in the up most position). The test load shall be applied and evenly distributed along a 2-in by 3.5-in (5.1 cm by 8.9 cm) wide portion of the load bearing component(s) of the clamping system. The application and distribution of the test load shall simulate actual loading conditions. The test load shall be applied gradually on the outer-most lateral position of the load bearing component(s) until the required test load is in place.		N/A
41.2.4	The test described in 41.2.1 shall be repeated on the foot supports, except that the test load shall be equal to two times the maximum rated body weight of the inversion table. Testing of the foot supports shall be conducted on a sample with the table in its full upright position (table in vertical position with foot support in the down-most position). The test load shall be applied and evenly distributed along a 2-in by 3.5-in (5.1 cm by 8.9 cm) wide portion of the foot supports. The test load shall be applied gradually on the outer-most lateral position of the foot supports until the required test load is in place.		N/A
41.2.5	If the inversion table is provided with other means of supporting the user while inverted, such as inversion boots and inversion boot support bar, these components shall be subjected to the test described in 41.2.1. Testing shall be conducted on the sample with the table in its full inverted position (table in vertical position with inversion boots and support in the up most position). The test load shall be applied and evenly distributed along a 2-in by 3.5-in (5.1 cm by 8.9 cm) portion of the load bearing components of the supporting system. The test load shall be applied gradually on the outer-most lateral position of the load bearing component(s) until the required test load is in place.		N/A
41.3	Impact tests on end stops		N/A
41.3.1	A sample of the complete inversion table shall be placed on a smooth level surface and loaded to the maximum rated body weight (load). The test load shall be distributed over the supporting surface, including any side rails, and shall be secured to the table to balance the table in the horizontal position. The table shall then be biased to just achieve the fully vertical inverted position by adjusting the load on the table. The table is then manually rotated to horizontal position. The table is then released from the horizontal position and allowed to freely rotate towards the inverted position and impact the end-stop. If the table rotates but does not impact the end stops, the load shall be readjusted to increase the bias towards the inverted position. The test shall be repeated for a total of 50 impacts.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
41.3.2	As a result of the testing, the end stop, crossbar, or mechanical stopping means, shall still be able to perform its function upon completion of the test, and there shall be no mechanical or structural damage to the end stop, crossbar, mechanical stopping means, or inversion table that would increase the risk of personal injury. After the testing, the sample shall be visually examined for any mechanical or structural damage (such as cracks on supporting members, loosening of parts, permanent deformation, grinding of rotating parts, misalignment of the table's rotation within the frame, outward spreading of the frame, tipping of the table, etc.).		N/A
41.4	Stability		N/A
41.4.1	An inversion table shall not overturn when subjected to conditions of maximum normal use, and when placed on a plane inclined at an angle of 10 degrees from the horizontal, or tipped through an angle of 10 degrees from an at-rest position on a horizontal plane.		N/A
41.4.2	The test shall be conducted under the conditions most likely to cause the inversion table to overturn. These conditions are considered to be:		N/A
	a) The position of all movable or adjustable parts (for example, with the table set to the smallest and largest body heights);		N/A
	b) Connection of, or omission of, any attachment made available by or recommended by the manufacturer;		N/A
	c) Provision of or omission of any normal mechanical load; and		N/A
	d) Direction in which the appliance is tipped or the supporting surface is inclined.		N/A
41.4.3	With respect to 41.4.2, the sample shall be placed on a smooth level surface and tested without a test load, and with a test load equivalent to the maximum rated body weight (load) in the following orientations. The test load shall be distributed evenly over the supporting surface, including any side rails, and shall be secured to the table.		N/A
	a) The table's full upright position;		N/A
	b) The table's full inverted position; and		N/A
	c) With the table in the horizontal position.		N/A
41.4.4	With respect to 41.4.2, the sample shall be placed on a smooth level surface and tested with a test load equivalent to the maximum rated body weight (load). A sample of the table shall be placed in its full inverted position (table in vertical position with ankle clamp in the up most position). The test load shall be suspended from the foot supports so that the load is evenly distributed on both supports as follows:		N/A
	a) With the test load suspended from the foot supports at a distance equal to the maximum rated body height (to simulate a person hanging in the full inverted position); and		N/A
	b) With the test load suspended from the foot supports at a distance equal to half of the maximum rated body height (to simulate an elevated center of mass; a person hanging in the full inverted, sit-up position).		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
41.5	Inversion table endurance		N/A
41.5.1	A sample of the inversion table shall be placed on a smooth level surface and subjected to 30,000 cycles of operation while supporting a test load equal to the maximum rated body weight (load) of the inversion table. As a result of the testing, there shall be no mechanical or structural damage to parts of the inversion table that would increase the risk of personal injury. After the testing, the sample shall operate as intended, and then be visually examined for any mechanical or structural damage (such as cracks on supporting members, loosening of parts, permanent deformation, grinding of rotating parts, misalignment of the table's rotation within the frame, outward spreading of the frame, tipping of the table, etc.).		N/A
41.5.2	A sample shall be tested with a test load equivalent to the maximum rated weight (load). The test load shall be distributed evenly over the supporting surface, including any side rails, foot supports, and ankle clamping systems, to simulate actual loading conditions.		N/A
41.5.3	The sample shall then be rotated using a rotating device from the full upright position to the full inverted position, and then back to the full upright position. This shall be considered one cycle of operation. Each cycle shall be completed within 10 seconds. A faster cycle time greater than 6 cycles per minute may be used if agreed upon by all involved.		N/A
41.5.4	During each cycle, the sample shall contact an end stop, cross bar, or other mechanical means that limits rotation in either position, but is not required during the endurance test to be subject to the impact force as required by Impact Test on End Stops, Section 41.3.		N/A
41.5.5	Motorized inversion tables shall be tested without the motor in the test set-up, by using a separate rotating device.		N/A
41.6	Ankle clamping system endurance		N/A
41.6.1	Moving parts of the ankle clamping system that are used to secure the user's ankles to the inversion table's frame shall be subjected to 30,000 cycles of clamping operation. As a result of the testing, there shall be no mechanical or structural damage to parts of the ankle clamping system that would increase the risk of personal injury. After the testing, the sample shall be visually examined for any mechanical or structural damage (such as cracks on supporting members, loosening of parts, etc.).		N/A
41.6.2	Two samples of the ankle clamps shall be subjected to this testing. The testing shall begin with the moving parts of the ankle clamping system at the full open position. The parts shall then be rotated, moved, or the like, to the fully closed position (e.g. the ankle clamping or holding position) and then back to the fully open position (e.g. the ankle releasing position). This is considered to be one cycle of clamping operation. Each cycle shall be completed within 10 seconds. A faster cycle time greater than 6 cycles per minute may be used if agreed upon by all involved.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
41.6.3	After the 30,000 cycles of clamping, the same samples shall be subjected to the mechanical strength testing in 41.2.3 except that the test load shall be equal to the maximum rated weight (load) of the inversion table. The same samples shall then be subjected to the endurance testing in Inversion Table Endurance, Section 41.5 except that the total number of test cycles shall consist of 100 cycles of operation. As a result of this testing, there shall be no mechanical or structural damage to parts of the ankle clamping system that would increase the risk of personal injury. After the testing, the sample shall be visually examined for any mechanical or structural damage (such as cracks on supporting members, loosening of parts, etc.).		N/A
41.6.4	Inversion boots provided with an ankle clamping system shall be subjected to the testing in 41.6.1 and 41.6.2. Two samples of the ankle clamping system shall be subjected to this testing. If the inversion boot has only one ankle clamp, then two boot samples are to be tested. If the inversion boot has more than one ankle clamp, two ankle clamps from one boot sample may be tested.		N/A
41.6.5	After the 30,000 cycles of clamping, the samples shall then be subjected to the mechanical strength testing in 41.2.5 except the test load shall be equal to the maximum rated weight (load) of the inversion table. The same sample shall then be subjected to the endurance testing in Inversion Table Endurance, Section 41.5 except that the total number of test cycles shall consist of 100 cycles of operation. As a result of this testing, there shall be no mechanical or structural damage to parts of the ankle clamping system that would increase the risk of personal injury. After the testing, the sample shall be visually examined for any mechanical or structural damage (such as cracks on supporting members, loosening of parts, etc.).		N/A
42	Dog Treadmills		N/A
42.1	Switches and controls		N/A
42.1.1	In addition to the manually operated motor control switch required by 26.4, a deliberate user action, such as a push button switch on the control panel, shall be required to initiate movement of the treadmill belt such that there is no unexpected operation. The motor control switch specified in 26.4 is not required to be on the control panel.		N/A
42.1.2	The control panel for the operation of the treadmill shall be readily accessible to the user. The control panel shall be provided with an obvious and readily accessible switch that is used to stop the treadmill belt.		N/A
42.1.3	If the treadmill is provided with a motor-operated incline system, the motor control switch required by 26.4 shall also stop the motion of the incline system.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
42.1.4	The switch described in 42.1.2 shall be plainly marked "OFF", "STOP", or with international symbols "O" and "I", in accordance with 37.4 or 37.5, as applicable. If the international symbols "O" and "I" are used, the significance of these symbols, "O" and "I" shall be explained in the instruction manual provided with the product (see 82.9).		N/A
42.1.5	The switch described in 42.1.2 that controls the OFF, STOP, PAUSE, or END functions of the treadmill belt shall be suitably rated with respect to voltage (ac or dc), current, and the load being switched (such as a motor load, a relay coil load, low voltage inductive, or low voltage resistive load). The switch shall also be suitable for 6000 cycles of operation for household-use treadmills, and 50,000 cycles of operation for commercial-use treadmills, or be tested in accordance with Push-Button Type Switch, Section 71.1.		N/A
42.1.6	If more than one switch or switching device is used to control the OFF, STOP, PAUSE, or END, functions then each switch or device shall comply with 42.1.2 - 42.1.5.		N/A
42.1.7	The motor or speed control that controls the speed and acceleration of the treadmill belt shall be suitably rated for the application, and shall comply with one of the following:		N/A
	a) A control that automatically controls the speed of the treadmill belt (such as during a pre-set program in which the speed of the belt automatically increases or decreases), shall comply with the applicable requirements in the Standard for Automatic Electrical Controls - Part 1: General Requirements, UL 60730-1; or		N/A
	b) A control that requires deliberate user action to change the speed of the treadmill belt (such as a push button on the control panel) shall comply with Electronic Components, Section 42.3, or with the applicable requirements in the Standard for Solid-State Controls for Appliances, UL 244A.		N/A
	Exception: A motor or speed control that is simple in design (for example, the control components consist of a triac and resistors, and does not include an integrated circuit) need only be subjected to the applicable requirements of this end-product standard; see Electronic Components, Section 42.3 and Abnormal Operation Test, Section 64.		N/A
42.1.8	To reduce the risk of injury to dogs using the treadmill, if the treadmill is provided with a safety speed control that requires the user to remove and replace a safety key (or the like) between treadmill uses so that the speed of the treadmill belt is reset to its slowest starting speed, it shall be tested in accordance with Dog Treadmill - Safety Key Control Test, Section 73. The speed control shall reset the speed of the treadmill to the slowest starting speed when:		N/A
	a) The user removes and replaces the safety key;		N/A
	b) The user stops the treadmill using the "STOP" button on the control panel;		N/A
	c) The user turns off the treadmill using the power "OFF" switch; and		N/A
	d) The user unplugs the treadmill.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
42.1.9	If a treadmill requires the user to assemble and electrically attach the control panel to the overall unit, the treadmill shall comply with the following:		N/A
	a) The treadmill shall not operate until the unit is properly assembled and the user turns the unit on and starts it as intended using the proper switches and controls, as determined in accordance with the Operational Test, Section 63.		N/A
	b) Any accessible live parts, wire connectors, and wiring shall be located in a low voltage, Class 2 circuit.		N/A
	c) Any interconnecting cords and wires that are used in the connection of the control panel shall be subjected to the Strain Relief Test, Section 60, using the 20 lb pull force specified in the Exception 2 of 60.1.		N/A
42.2	Emergency stop switch		N/A
42.2.1	A treadmill shall be provided with an emergency stop switch. This switch may be either a push-button type or pull-cord type.		N/A
42.2.2	The actuator of a push-button type switch shall be either the palm or mushroom-head design, and shall be a color that contrasts with its background. The safety key, or the like, of a pull-cord switch, shall be a color that contrasts with its background.		N/A
42.2.3	The switch shall be suitably rated with respect to voltage (ac or dc), current, and the load being switched (such as a motor load, a relay coil load, low voltage inductive, or low voltage resistive load), and shall be suitable for 6,000 cycles of operation for household-use treadmills, or 50,000 cycles for commercial-use treadmills, or tested in accordance with the Emergency Stop Switch Endurance Test, Section 71.		N/A
42.2.4	For a pull-cord type switch, the entire pull-cord system shall be suitable for the number of cycles of operation as indicated in 42.2.3 when tested in accordance with the Emergency Stop Switch Endurance Test, Section 71. The pull-cord system may be comprised of a safety key, cord, strap, mechanical connections, and the like.		N/A
42.2.5	When the emergency stop switch is actuated, the power to the belt motor (and to the motor-operated incline system, if applicable) shall be directly disconnected without using the treadmill's software (if applicable), and the treadmill belt shall be decelerated until it comes to a complete stop. Power to the user interface or display need not be disconnected when the emergency switch is actuated.		N/A
42.2.6	After actuation of the emergency stop switch, it shall not be possible to restart the treadmill until the user manually resets the emergency stop switch.		N/A
42.3	Electronic components		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
42.3.1	A treadmill that uses electronic controls and circuit components in its design (such as a resistor, capacitor, solid state device, and the like), the failure of which may increase the likelihood of unexpected operation, or an unexpected increase in the speed of the treadmill belt, shall be subjected to the Abnormal Operation - Electronic Components Test, Section 64.2.		N/A
42.3.2	A treadmill provided with an automatic speed control shall comply with 42.1.7(a).		N/A
42.3.3	Single-fault analysis of the motor speed control circuit and testing on each critical component located in the speed control circuit shall be conducted, as applicable.		N/A
42.3.4	As a result of the testing in 42.3.3, the treadmill shall:		N/A
	a) Not unexpectedly operate; and		N/A
	b) Not exhibit an increase in the speed of the treadmill belt.		N/A
42.4	Dog treadmill storage		N/A
42.4.1	If a treadmill can be folded-up for the purpose of storage, the upright, folded-up, storage position of the treadmill shall have a positive means of locking the treadmill in place. See 81.8.2.		N/A
42.4.2	The treadmill shall comply with the Stability Test, Section 38. The test shall be conducted with the treadmill in its upright, folded storage position.		N/A
43	Motion Simulation Appliances		N/A
43.1	Enclosures and guards		N/A
43.1.1	When the operation and maintenance of a motion simulation appliance by the user or bystanders involves the risk of injury to persons, protection shall be provided to reduce the risk.		N/A
43.1.2	When investigating an appliance with respect to the requirement in 43.1.1, conditions of foreseeable misuse shall be evaluated.		N/A
43.1.3	A functional attachment that is made available or specified by the manufacturer for use with a motion-simulation appliance shall be included in the investigation of the appliance. Unless the manufacturer specifies the use of two or more attachments at the same time, only one attachment at a time is to be investigated with the appliance.		N/A
43.1.4	Whether a guard, a release, an interlock, or similar device is required and whether such a device is adequate shall be determined from an investigation of the complete appliance (consisting of a motion simulation assembly and the upholstered furnishing), its operating characteristics, and the potential risk of injury to persons. The investigation shall include evaluation of the results of breakdown or malfunction of any one component, and not more than one component at a time, unless one event contributes to another. When the investigation shows that breakdown or malfunction of a particular component results in a risk of injury to persons, that component shall be investigated for reliability.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
43.1.5	A moving part, lifting or reclining mechanism, or other part that constitutes a risk of injury shall be enclosed or provided with means to reduce the risk of injury. Such a part shall not be able to be contacted by the probe illustrated in Figure 12.1 unless the appliance is provided with a safety circuit and complies with 43.1.6.		N/A
43.1.6	Appliances that present a risk of injury as described in 43.1.5 shall be provided with either an active safety circuit or passive guard to prevent injury.		N/A
43.1.7	Safety systems that are electrical in nature shall be designed such that any failure of the system will result in the appliance not producing a risk of injury due to the safety system failure. The active safety control and circuit shall comply with Controls and Safety Circuits, Section 43.2.		N/A
43.1.8	A mechanical safety system, such as a guard, shall comply with 43.1.11.		N/A
43.1.9	During the investigation of an appliance to determine compliance with 43.1.5, a part of the enclosure that is removable without the use of a tool (such as an accessory, the cover over an opening for an operating adjustment, or similar components) is to be opened or removed.		N/A
	Exception: A part that is removable without the use of a tool is not required to be opened or removed when the appliance is marked in accordance with 39.6.		N/A
43.1.10	Among the factors to be evaluated with respect to both intended operation of the appliance and any foreseeable misuse in investigating an exposed moving part are:		N/A
	a) The degree of exposure required to perform the intended function;		N/A
	b) The sharpness of the moving part;		N/A
	c) The risk of unintentional contact;		N/A
	d) The speed of the moving part; and		N/A
	e) The risk that a part of the body is endangered or that clothing is able to be entangled by the moving part, resulting in a risk of injury to persons.		N/A
43.1.11	Guards shall:		N/A
	a) Require the use of tools for their removal;		N/A
	b) Be removable for servicing;		N/A
	c) Have sufficient strength and rigidity;		N/A
	d) Be complete;		N/A
	e) Not present a risk of injury to persons such as a pinch point, during additional handling because of required service, such as cleaning, unjamming, or similar service; and		N/A
	f) Be self-restoring.		N/A
43.1.12	An enclosure or guard over a rotating part shall retain a part that, because of breakage or other reasons, becomes loose or separates from a rotating part, and shall retain a foreign object that is able to be struck and propelled by the rotating part.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
43.1.13	When breakage or deterioration of material adjacent to a moving part results in an increased risk of injury, the material shall have such properties as to withstand the loads it is subjected to during use of the appliance.		N/A
43.2	Controls and safety circuits		N/A
43.2.1	An individual component or an electronic circuit used to perform safety functions shall indicate that the reliability of the components and circuit are suitable for the application. Components that have been determined to be reliable through previous investigation are not subject to further evaluation unless by review of the use or specific use within a circuit requires additional evaluation to determine the device or circuit will perform reliably. An electro-mechanical device intended to control the safety functionality of the appliance, such as but not limited to a relay, contactor, position switch, reed switch and similar devices shall be capable of functioning properly through 100,000 cycles of operation at rated load.		N/A
43.2.2	A component investigation in accordance with the Abnormal-Operation Test, Section 64 shall be required when evaluating:		N/A
	a) Controls that perform safety functions;		N/A
	b) Circuits that perform safety functions; and		N/A
	c) Normal operation control whose failure to function as intended would result in a risk of fire, electric shock, or injury to persons.		N/A
43.2.3	The failure of a component in a control circuit shall not result in a risk of fire, electric shock, or injury to persons.		N/A
43.2.4	When the investigation in accordance with the Abnormal-Operation Test, Section 64 determines that a component or circuit fault results in a risk of fire, electric shock, or injury to persons, then the component(s) or circuit(s) in question shall be investigated to determine that they possess the necessary reliability for the anticipated product service life. The circuit(s) shall comply with the requirements in the Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991.		N/A
43.2.5	When the Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991 is used to determine compliance with 43.2.4, only the following criteria from UL 991 shall be applied:		N/A
	a) Supervised safety circuits as defined by UL 991 may not rely on a trouble signal or indicator to prevent the risk of injury.		N/A
	b) The Composite Operational and Thermal Cycling Tests in accordance with UL 991 is not required on indoor appliances.		N/A
	c) The Humidity Tests on safety control circuits shall be conducted as defined under Humidity Classes for the products intended use.		N/A
	d) A product relying on a safety circuit shall be supplied, for the investigation of the product, with a failure-mode and effect analysis in accordance with Failure-Mode and Effect Analysis (FMEA).		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	e) With regard to electrical supervision of critical components, a motor operated system being inoperative with respect to movement of the device complies with the criteria for trouble indication.		N/A
	f) A field strength of 3 V per meter is to be used for the Radiated EMI Test.		N/A
	g) A vibration level of 5 g is to be used for the Vibration Test.		N/A
	h) When a Computational Investigation is conducted, λ_p shall not be greater than 6 failures/106 hours for the entire system. For external secondary entrapment protection devices that are sold separately, λ_p shall not be greater than 0 failures/106 hours. For internal secondary entrapment protection devices whether or not they are sold separately, λ_p shall not be greater than 0 failures/10 6 hours. The Operational Test is to be conducted for 14 days.		N/A
	i) The Endurance Test is to be conducted concurrently with the Operational Test. The control shall perform its intended function while being conditioned for 14 days in an ambient air temperature of 60°C (160°F), or 10°C (18°F) greater than the operating temperature of the control, whichever is higher. During the test, the control is to be operated in a manner representing the full range of motion of the mounting system.		N/A
	j) For the Electrical Fast Transient Burst Test, test level 3 is to be used for systems.		N/A
43.3	Stability test		N/A
43.3.1	A motion simulation appliance shall be subjected to the stability requirements in 43.3.4 and 43.3.6, as applicable. As a result of the tests, there shall be no introduction of a risk of fire, electric shock, or injury to persons. The stability tests shall be conducted prior to the Mechanical Strength (Proof Load) Tests, Section 43.4.		N/A
	a) A risk of injury to persons is determined to exist when the appliance or part of the appliance fails to remain upright, is displaced from its support system, or when the appliance or support system is damaged to the extent that there are sharp edges or corners exposed. Whenever referee measurements are necessary to determine that a part is not sufficiently sharp to constitute a risk of injury to persons, the method described in the requirements for determination of sharpness of edges on equipment in the Standard for Test for Sharpness of Edges on Equipment, UL 1439 shall be used.		N/A
	b) A risk of fire or electric shock is determined to exist if the appliance does not comply with the requirements in Accessibility of Uninsulated Live Parts and Film-Coated Wire, Section 12, and Dielectric Voltage-Withstand Test, Section 52, after the stability test.		N/A
43.3.2	An appliance is to be tested on a smooth hard surface such as concrete or smooth wood. The appliance shall be assembled or set up in accordance with the instruction manual provided with the appliance.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
43.3.3	An appliance shall be subjected to the stability tests while at rest, and while operating in any or all of the following conditions considered to be most severe:		N/A
	a) Unloaded condition;		N/A
	b) Partially loaded condition; and		N/A
	c) Fully loaded condition.		N/A
43.3.4	An appliance that is intended to support a person while seated shall be subjected to the stability test described in 43.3.5. As a result of the test, there shall be no damage that introduces a risk of fire, electric shock, or injury to persons.		N/A
43.3.5	The appliance as described in 43.3.4 shall be configured as described in 43.3.2. A sample of each type of a fully assembled appliance is to be subjected to a 300-lb (136-kg) load applied through a 16 inch (406 mm) diameter rigid disk. The load is to be moved or repositioned slowly over the entire surface intended for seating. The edge of the disk shall be allowed to overhang the edge of the appliance a maximum of four inches along unobstructed edges. An obstructed edge is considered to be one which has a raised projection such as the back of a chair, or the arms of a chair. The appliance shall not tip more than ten degrees from its at rest position.		N/A
43.3.6	An appliance provided with a foot rest or foot support, or a surface that is likely to be used as a foot rest and/or leg rest and not likely to be used as a step, shall be subjected to the stability test described in 43.3.7. The appliance shall not tip more than 10 degrees from its at rest position. As a result of the test, no permanent damage or deflection shall occur to the appliance and there shall be no damage that introduces a risk of fire, electric shock, or injury to persons.		N/A
43.3.7	An appliance as described in 43.3.6 shall be configured as described in 43.3.2. A sample of each type of a fully assembled appliance is to be subjected to a 50 lb (222.4 N) load applied straight down through a flat rigid structure 4 by 4 inches (102 by 102 mm) in any position along the appliance structure element under investigation. The load is to be applied for 1 minute. The appliance shall not tip more than 10 degrees from its at rest position.		N/A
43.4	Mechanical strength (proof load) tests		N/A
43.4.1	General		N/A
43.4.1.1	A motion simulation appliance shall be subjected to the tests described in Load-Bearing Surface (Couch, Or Chair) Weight And Weight Drop Tests, Section 43.4.2. This test shall be conducted with the appliance unenergized, and then energized under the condition considered worse case. As a result of the tests, the appliance shall not collapse or deform to a degree that introduces a risk of fire, electric shock, or injury to persons.		N/A
43.4.1.2	With reference to 43.4.1.1:		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	a) A risk of injury to persons is determined to exist when the appliance or part of a appliance is displaced from its support system or when the appliance or support system is damaged to the extent that there are sharp edges or corners exposed. Whenever referee measurements are necessary to determine that a part is not sufficiently sharp to constitute a risk of injury to persons, the method described in the requirements for determination of sharpness of edges on equipment in the Standard for Test for Sharpness of Edges on Equipment, UL 1439 shall be used.		N/A
	b) A risk of fire or electric shock is determined to exist if the appliance does not comply with the requirements in Accessibility of Uninsulated Live Parts and Film-Coated Wire, Section 12, and Dielectric Voltage-Withstand Test, Section 52.		N/A
43.4.2	Load-bearing surface (couch, or chair) weight and weight drop tests		N/A
43.4.2.1	For the weight test, a test weight of 450 lbs (204 kg) for each intended person is to be applied to the appliance. For example, a chair is intended for 1 person and a couch is intended for 2 or 3 people. The weight shall be evenly distributed over the surface. The weight shall be applied for 3 hours.		N/A
43.4.2.2	For the weight drop test, a test weight of 300 lbs (136 kg) in a canvass bag 16 inches (41 cm) in diameter filled with sand, ball bearings, lead shot, or steel shot is to be applied the appliance. The weight shall be dropped 6 inches (21.24 cm) above the surface. Any sitting position not under test shall have a weight of 225 lbs (102 kg). Any laying position not under test shall have a weight of 250 lbs (113 kg). Each sitting or laying position shall be tested.		N/A
	PERFORMANCE		P
44	General		P
45	Leakage-Current Test		N/A
46	Leakage Current Following Humidity Conditioning		N/A
47	Starting-Current Test		N/A
48	Input Test		P
49	Temperature Test		P
50	Surface Temperatures		N/A
51	Surface-Temperature Test		N/A
52	Dielectric Voltage-Withstand Test		P

Report Reference No.: CN24KRS7 001

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
53	Resistance to Moisture Test		N/A
54	Resistance to Moisture Tests for Massage Type Footbaths		N/A
55	Flooding of Live Parts Test		N/A
56	Fluid-Handling Tubing Tests		N/A
57	Backflow Prevention Test		N/A
58	Switch and Control Test		N/A
59	Thermostat Test		N/A
60	Strain-Relief Test		N/A
61	Strain-Relief Clamp Test		N/A
62	Flexing and Twisting Test		N/A
63	Operational Test		N/A
64	Abnormal-Operation Test		P
65	Permanence of Marking Test		N/A
66	Polymeric Enclosure Tests		N/A
66.1	Mold stress-relief distortion		N/A
66.2	Impact		N/A
66.3	Drop impact		N/A
66.4	Ball impact		N/A
66.5	Strain-relief after mold stress-relief distortion		N/A
66.6	Abnormal operation		N/A
66.7	Crushing resistance		N/A
66.8	Thermal aging		N/A
67	Polymeric Materials Used as Structural Support		N/A
68	End-Product Arc Resistance		N/A
69	Abnormal Overload Test		N/A

Report Reference No.: CN24KRS7 001

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
70	Shiatsu-Type Massager Entrapment Test		N/A
71	Emergency Stop Switch Endurance Test		N/A
71.1	Push-button type switch		N/A
71.2	Pull-cord type switch system		N/A
72	Treadmill Belt Speed Test		N/A
72.1	Maximum initial starting speed		N/A
72.2	Maximum acceleration		N/A
73	Dog Treadmill - Safety Key Control Test		N/A
74	Solenoids		N/A
75	General Purpose Transformers		N/A
76	Thermoplastic Motor Insulation Systems		N/A
77	Treadmills - Interoperability		N/A
77.1	Deleted		N/A
77.2	Deleted		N/A
	MANUFACTURING AND PRODUCTION TESTS		N/A
78	Dielectric Voltage-Withstand Test		N/A
79	Grounding-Continuity Test		N/A
	RATING		P
80	Details		P
80.1	An appliance shall be rated in volts, in frequency (expressed in one of the following terms: hertz, Hz, cycles-per-second, cps, cycles/second, c/s, ac-dc, or ac only) and, other than as noted in 80.2, in amperes. The frequency may be expressed as ___/dc - for example, 60/dc - if a universal motor nameplate serves as the appliance rating marking.		P
80.2	Instead of the ampere rating mentioned in 80.1, an appliance shall be rated in watts if the full-load power factor is 0.80 or more or if the rating of a cord-connected appliance is 50 W or less.		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
80.3	If a permanently connected appliance is marked with a horsepower rating, the rating shall not be less than the marked horsepower rating of the motor employed. If the appliance employs multiple motors, or one or more motors and other loads, the marked horsepower rating of the appliance shall not be less than the equivalent of the horsepower rating of the combined loads. The total load shall be calculated in accordance with Article 422.62(A) of the National Electrical Code, ANSI/NFPA 70.		N/A
80.4	With reference to 80.3, if a motor is not marked with a horsepower rating, the horsepower rating shall be equivalent to the rated full-load current of the motor in accordance with Article 430 and the applicable full-load current tables of the National Electrical Code, ANSI/NFPA 70. For a universal motor, the table applying to a single-phase, alternating-current motor is to be used if the appliance is marked for use on alternating current only, otherwise the table applying to direct-current motors is to be used.		N/A
80.5	A general use receptacle provided with a machine shall be marked with its maximum rating in volts and amperes by means of a marking on or near the receptacle, and this rating shall be included in the overall electrical rating of the machine.		N/A
	Exception No. 1: A receptacle with a NEMA configuration is not required to be marked with its voltage rating.		N/A
	Exception No. 2: If a machine is tested with a load equal to the ampere rating of the NEMA configuration for the receptacle, the maximum ampere marking is not required.		N/A
80.6	A dog treadmill shall be permanently marked with the maximum rated dog weight. This maximum rated weight shall also be included in the instruction manual.		N/A
	MARKING		P
81	Details		P
81.1	General		P
81.1.1	An appliance shall be plainly and permanently marked where it will be readily visible - after installation, in the case of a permanently connected appliance - with:		P
	a) The manufacturer's name, trade name, or trademark, or other descriptive marking by which the organization responsible for the product may be identified;		P
	Exception: When the product is identified by the brand or trademark owned by a private labeler, the manufacturer's identification by means of a traceable code meets the intent of the requirement.		N/A
	b) A distinctive catalog number or the equivalent;		P
	c) The electrical rating; and		P
	d) The date or other dating period of manufacture not exceeding any three consecutive months.		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	Exception: The date of manufacture in abbreviated form, in a nationally accepted conventional code, or in a code affirmed by the manufacturer meets the intent of the requirement when the code:		N/A
	a) Does not repeat in less than 10 years for a household product or less than 20 years for a commercial product; and		N/A
	b) Does not require reference to the production records of the manufacturer to determine when the product was manufactured.		N/A
81.1.2	An appliance that employs a single motor as its only electric-energy-consuming component need not show the electrical rating given on the motor nameplate elsewhere on the appliance if this nameplate is readily visible after the motor has been installed in the appliance.		N/A
81.1.3	If the motor nameplate of a dual-voltage motor is employed to give the electrical rating of the appliance as provided in 81.1.2, the appliance shall be additionally and permanently marked to indicate the particular voltage for which it is connected when shipped from the factory. If the appliance employs an attachment plug, instructions shall be provided to indicate the type of plug that should be used if the appliance is reconnected for the alternate voltage. See 13.1.1.9.		N/A
81.1.4	If a manufacturer produces or assembles motor-operated appliances at more than one factory, each finished appliance shall have a distinctive permanent marking by means of which it may be identified as the product of a particular factory.		N/A
81.1.5	If the construction of an appliance contemplates cleaning or servicing, such as the replacement of pilot lamps or fuses, by the user, and if such cleaning or servicing would involve the exposure of a normally enclosed or protected live part to unintentional contact, the appliance shall be plainly and permanently marked to indicate that such servicing or cleaning be done with the appliance disconnected from the supply circuit.		N/A
81.1.6	An appliance that will not start and attain intended running speed when connected to a circuit protected by an ordinary - not a time-delay - fuse as described in 47.1 shall be plainly and permanently marked with the words "If connected to a circuit protected by fuses, use time-delay fuses with this appliance," or with an equivalent wording.		N/A
81.1.7	An appliance shall not be marked with a double insulation symbol - a square within a square, or the words "Double Insulation," or the equivalent unless it complies with the applicable requirements in the Standard for Double Insulation Systems for Use in Electrical Appliances, UL 1097.		N/A
81.2	Permanently connected appliances		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
81.2.1	If any point within a terminal box or wiring compartment of a permanently connected appliance in which the power-supply conductors are intended to be connected, including such conductors themselves, attains a temperature rise of more than 35°C (63°F) during the temperature test, the appliance shall be permanently marked "For supply connection, use wires acceptable for at least __°C (__°F)," or with an equivalent statement, and the temperature value shall be in accordance with Table 81.1. This statement shall be located at or near the point where the supply connections are to be made, and shall be clearly visible both during and after installation of the appliance.		N/A
81.2.2	A permanently connected appliance having one motor and other loads or more than one motor with or without other loads shall be permanently marked in a location that will be visible when connections to the power-supply circuit are made and inspected with:		N/A
	a) The minimum supply-circuit conductor ampacity based on the maximum input in accordance with 48.1;		N/A
	b) The maximum rating of the supply-circuit overcurrent-protective device, which is not to exceed the rating of the fuse employed in the short-circuit test of the motor-overload-protective device employed in the appliance; and		N/A
	c) The type of supply-circuit overcurrent-protective device - for example, nontime delay fuse or dual-element time-delay fuse.		N/A
81.2.3	An appliance intended for permanent connection to a wiring system other than rigid metal conduit or armored cable shall be permanently marked to indicate the system or systems for which it is acceptable. The marking shall be located so that it will be visible when power-supply connections to the appliance are being made.		N/A
81.3	Components		N/A
81.3.1	A heating element rated more than 1 A and intended to be replaceable in the field shall be permanently marked with its rating in volts and amperes or in volts and watts, or the manufacturer's part number, or other means of identification.		N/A
81.3.2	An appliance that is intended to be controlled by or operated in conjunction with a capacitor/transformer unit shall be supplied with such capacitor or unit. A capacitor or a unit that is not physically a part of the appliance shall be permanently marked with an identification symbol. This symbol shall also appear on the nameplate of the motor.		N/A
81.4	Appliances with heating pads		P
81.4.1	An appliance employing a heating pad and constructed with a covering of cloth-backed vinyl, fabric, or other similar material shall be marked:		P
	"WARNING		P
	BURNS WILL RESULT FROM IMPROPER USE		P
	READ INSTRUCTIONS BEFORE USING		P
	DO NOT WET - DO NOT USE PINS		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	NEVER REMOVE COVER."		P
81.4.2	The marking specified in 81.4.1 shall be readily visible and permanent. It shall also be marked on such appliances as a heated vibrating chair, heated footstool vibrator, or the like. The lettering shall be in accordance with 39.4.		P
81.5	Treadmills		N/A
81.5.1	If the treadmill is intended to be cleaned or serviced by the user (such as replacement of belts and the like) and this cleaning or servicing involves the exposure of any normally enclosed or protected uninsulated live parts to unintentional contact, or involves exposure to moving parts, the appliance shall be clearly and permanently marked with the following, or equivalent wording. These statements shall also be included in the Important Safety Instructions; See Instructions Pertaining to a Risk of Fire, Electric Shock, or Injury to Persons, Section 83.		N/A
	"CAUTION - To Reduce The Risk Of Injury From Moving Parts - Unplug Before Servicing."		N/A
	"WARNING - To Reduce the Risk of Electric Shock - Unplug Before Cleaning or Servicing"		N/A
81.5.2	In addition to the requirements of Exercise Machines Including Treadmills, Section 81.10, a treadmill shall be marked on the top of the handrail, on the control console, or in a place that is readily visible to the user before operation with the word "CAUTION" and the following or equivalent wording: " Risk of Injury to Persons - To Avoid Injury, use extreme caution when stepping onto or off of a moving belt. Read Instruction Manual Before Using."		N/A
81.6	Massage type footbaths		N/A
81.6.1	A massage type footbath shall be marked with a maximum fill line. The word "maximum" or the equivalent is to be marked on the footbath near the maximum fill line.		N/A
81.7	Inversion tables		N/A
81.7.1	Inversion tables shall be permanently marked with the following or equivalent:		N/A
	a) The maximum rated weight (load) and maximum rated height of the user;		N/A
	b) "For Household Use Only;"		N/A
	c) "WARNING - To reduce the risk of personal injury, read and understand all the instructions before using the inversion table;"		N/A
	d) "WARNING - Risk of personal injury - Do not allow children to use this machine;"		N/A
	e) "WARNING - Risk of personal injury - Keep children away from machine while in use;"		N/A
	f) "WARNING - Risk of personal injury - Keep body parts, hair, loose clothing and jewelry clear of all moving parts."		N/A
81.8	Dog treadmills		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
81.8.1	If a treadmill intended for use by dogs is intended to be cleaned or serviced by the user (such as replacement of belts and the like) and this cleaning or servicing involves the exposure of any normally enclosed or protected uninsulated live parts to unintentional contact, or involves exposure to moving parts, the appliance shall be permanently marked with the following, or equivalent wording. These statements shall also be included in the Important Safety Instructions. See Instructions Pertaining to a Risk of Fire, Electric Shock, or Injury to Persons, Section 83.		N/A
	"CAUTION - To Reduce The Risk Of Injury From Moving Parts - Unplug Before Servicing."		N/A
	"WARNING - To Reduce the Risk of Electric Shock - Unplug Before Cleaning or Servicing"		N/A
81.8.2	If a dog treadmill can be folded-up for the purpose of storage, it shall be permanently marked with the following, or equivalent wording: "CAUTION - To Reduce the Risk of Injury - Read and Follow the Storage Instructions When Folding Up and Storing this Treadmill." These statements shall also be included in the Important Safety Instructions. See Instructions Pertaining to a Risk of Fire, Electric Shock, or Injury to Persons, Section 83.		N/A
81.8.3	A dog treadmill provided with a motorized incline system shall be permanently marked with the following or equivalent wording near the area(s) where the inclining or declining treadmill frame meets a stationary treadmill supporting surface. This warning shall also be included in the Important Safety Instructions. See Instructions Pertaining to a Risk of Fire, Electric Shock, or Injury to Persons, Section 83.		N/A
	"WARNING - Risk of Personal Injury - Crushing Hazard When Treadmill is Inclining or Declining - Keep feet, hands, and fingers away from moving parts."		N/A
81.9	Agility trainers		N/A
81.9.1	An agility trainer provided with external low-voltage connections (e.g. RJ-45 Ethernet connection) shall be permanently marked with the following:		N/A
	a) Each external connection shall be marked according to its use; and		N/A
	b) The connection for a direct plug in transformer shall be marked, "For Use Only With + Class 2 Transformer" or the equivalent.		N/A
	c) (+) - Manufacturer and model/catalog number.		N/A
81.9.2	An agility trainer provided with a footboard shall be permanently marked as follows, or the equivalent:		N/A
	"CAUTION: To reduce the risk of personal injury, place the footboard on a flat, horizontal, and stable surface. Do not place or use the footboard on a slippery surface. Do not use the footboard with wet shoes, wet feet, or socks. Do not use the footboard if the surface is wet; if the footboard surface becomes wet, dry the surface before using."		N/A
81.10	Exercise Machines, Including Treadmills		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
81.10.1	Exercise machines shall be permanently marked in an area encountered by the user prior to commencing exercise with the following or equivalent:		N/A
	WARNING - Risk of personal injury - Keep children under the age of 13 away from machine.		N/A
81.11	Motion Simulation Appliances		N/A
81.11.1	A motion simulation appliance as described in 4.23 and that has been investigated and found suitable for household use shall be permanently marked on the appliance to inform the user that the appliance is for household use only. The following or equivalent wording shall be used, "For Household/Residential Use Only". This marking shall also be on any container and be visible while displayed.		N/A
81.11.2	A motion simulation appliance as described in 4.23 shall be permanently marked with the following or equivalent wording:		N/A
	a) The maximum rated user weight (load); and		N/A
	b) "WARNING - To reduce the risk of personal injury, read and understand all the instructions before using this product."		N/A
	INSTRUCTION MANUAL		P
82	General		P
82.1	An appliance shall be provided with legible instructions pertaining to:		P
	a) The risk of fire, electric shock, or injury to persons that may be associated with the use of the appliance;		P
	b) Operation;		P
	c) User-maintenance and storage, and, as applicable; and		P
	d) Grounding or double-insulation.		N/A
82.2	The instructions shall indicate whether the appliance is intended for household or commercial use, or both.		P
82.3	The instructions shall include the cautionary markings, or equivalent wording, specified in Markings, Section 39, and Marking-Details, Section 81.		P
82.4	The text of all required instructions shall be in the words specified or words that are equivalent, clear, and understandable.		P
	Exception: If an appliance is such that the specified wording is unnecessary or conflicting, the wording may be omitted or modified, as appropriate.		P
82.5	With reference to the requirement in 82.4, there shall be no substitute for the cautionary prefixes "DANGER " and "WARNING."		P
82.6	Instructions or illustrations shall be provided to identify important parts of the appliance, such as a stroke- or power-adjustment means or heat settings. An illustration may be used with a required instruction to clarify the intent, but shall not replace the written instruction.		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
82.7	Wording in parentheses in Instructions Pertaining To A Risk of Fire, Electric Shock, Or Injury To Persons, Section 83, Operating Instructions, Section 84, User-Maintenance Instructions, Section 85, Grounding/Double Insulation Instructions, Section 86 is explanatory, indicating options, alternatives, or cross-references. Wherever the word "appliance" is used, the name of the specific appliance may be substituted in the final text.		N/A
82.8	With reference to the requirements in 37.3, the international symbols specified may be used only when the significance of these symbols is explained in the instructions provided with the appliance.		P
82.9	With reference to the requirements in 37.3, the international symbols specified may be used only when the significance of these symbols is explained in the instructions provided with the appliance.		P
83	Instructions Pertaining to a Risk of Fire, Electric Shock, or Injury to Persons		P
83.1	Instructions pertaining to a risk of fire, electric shock, or injury to persons shall warn the user of reasonably foreseeable risks and state the precautions that should be taken to reduce such risks.		P
83.2	The instructions pertaining to a risk of fire, electric shock, or injury to persons shall be:		P
	a) In the first part of the manual;		P
	b) Before the operating instructions;		P
	c) Separate in format from other instructions related to assembly, operation, maintenance, and storage; and		P
	d) A permanent part of the manual.		P
83.3	The height of lettering in the text and illustrations of the instructions specified in 83.5 and 83.6 shall be as follows:		P
	a) Upper case letters - not less than 5/83 in (1.9 mm);		P
	b) Lower case letters - not less than 1/16 in (1.6 mm);		P
	c) The statements required by 83.4; and cautionary prefixes, "DANGER " and "WARNING ," required by 83.5 and 86.1 - not less than 3/16 in (4.8 mm).		P
83.4	The statement "IMPORTANT SAFETY INSTRUCTIONS " or the equivalent shall precede the list of instructions required by 83.5 and 83.6, and the statement "SAVE THESE INSTRUCTIONS " or the equivalent shall either precede or follow the list.		P
83.5	The instructions required by 83.1 shall include the items in the following list, as applicable, and any other instructions that the manufacturer deems necessary for the appliance. The list shall not include the items mentioned in 82.2 or in Operating Instructions, Section 84, User-Maintenance Instructions, Section 85, Grounding/Double Insulation Instructions, Section 86. The statement "Read all instructions before using " shall precede the list of items following the word "DANGER." The items may be numbered.		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	IMPORTANT SAFETY INSTRUCTIONS		P
	When using an electrical appliance, basic precautions should always be followed, including the following:		P
	Read all instructions before using (this appliance).		P
	DANGER - To reduce the risk of electric shock:		P
	1) Always unplug this appliance from the electrical outlet immediately after using and before cleaning.		P
	WARNING - To reduce the risk of burns, fire, electric shock, or injury to persons:		P
	1) An appliance should never be left unattended when plugged in. Unplug from outlet when not in use, and before putting on or taking off parts.		P
	2) Do not operate under blanket or pillow. Excessive heating can occur and cause fire, electric shock, or injury to persons.		
	3) Close supervision is necessary when this appliance is used by, on, or near children, invalids, or disabled persons.		P
	4) Use this appliance only for its intended use as described in this manual. Do not use attachments not recommended by the manufacturer.		P
	5) Never operate this appliance if it has a damaged cord or plug, if it is not working properly, if it has been dropped or damaged, or dropped into water. Return the appliance to a service center for examination and repair.		P
	6) Do not carry this appliance by supply cord or use cord as a handle.		P
	7) Keep the cord away from heated surfaces.		P
	8) Never operate the appliance with the air openings blocked. Keep the air openings free of lint, hair, and the like.		P
	9) Never drop or insert any object into any opening.		P
	10) Do not use outdoors.		P
	11) Do not operate where aerosol (spray) products are being used or where oxygen is being administered.		P
	12) To disconnect, turn all controls to the off position, then remove plug from outlet.		P
	SAVE THESE INSTRUCTIONS		P
83.6	The following instructions shall be included in the list of items in addition to the items in 83.5 for the appliances indicated. If more than one item applies to the appliance, all applicable items for the appliance type shall be included.		P
	a) Hand-Held or Hand-Supported Appliances -		N/A
	1) The following items shall be included following the heading "DANGER."		N/A
	i) Do not reach for an appliance that has fallen into water. Unplug immediately.		N/A
	ii) Do not use while bathing or in a shower.		N/A
	iii) Do not place or store appliance where it can fall or be pulled into a tub or sink. Do not place in or drop into water or other liquid.		N/A
	2) The following item shall be added to (8) following the heading "WARNING:"		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	i) Never operate on a soft surface such as a bed or couch where the air openings may be blocked.		N/A
	b) Appliances with a heated surface other than those mentioned in (c) -		N/A
	1) The following item shall be included following the heading "WARNING:"		N/A
	i) Use heated surfaces carefully. May cause serious burns. Do not use over insensitive skin areas or in the presence of poor circulation. The unattended use of heat by children or incapacitated persons may be dangerous.		N/A
	c) Appliances With Heating Pads -		P
	1) For an appliance employing a heating pad and constructed with a covering of cloth backed vinyl, fabric or other similar material, the following items shall be provided following the heading "DANGER:"		P
	i) Never use pins or other metallic fasteners with this appliance.		P
	ii) Carefully examine the covering before each use. Discard the appliance if the covering shows any sign of deterioration, such as checking, blistering, or cracking.		P
	iii) Keep Dry - Do not operate in a wet or moist condition.		P
	2) The following items shall be added following the heading "WARNING:"		P
	i) Temperatures sufficiently high to cause burns may occur regardless of the control setting. Do not use on an infant or invalid or on a sleeping or unconscious person. Do not use on insensitive skin or on a person with poor blood circulation. Check the skin in contact with the heated area of the appliance frequently to reduce the risk of blistering.		N/A
	ii) Do Not Crush - Avoid sharp folds.		P
	d) Tub type foot massagers -		N/A
	1) The following item shall be included following the heading "WARNING:"		N/A
	i) Do not stand on or in appliance. Use only while seated.		N/A
	e) Chairs, and the like, with movable parts such as foot supports -		N/A
	1) The following item shall be added to (3) of the list following the heading "WARNING:"		N/A
	i) Keep children away from extended foot support (or other similar parts).		N/A
	f) Grounded Products -		N/A
	1) The following item shall be included following the heading "WARNING:"		N/A
	i) Connect this appliance to a properly grounded outlet only. See Grounding Instructions.		N/A
	g) Massage type footbaths -		N/A
	1) The following items shall be included following the heading "DANGER:"		N/A
	Do not reach for a product that has fallen into water. Unplug immediately.		N/A
	ii) Do not place or store appliance where it can fall or be pulled into a tub or sink.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	iii) Do not place in or drop into water or other liquid.		N/A
	2) The following items shall be included following the heading "WARNING:"		N/A
	i) Do not handle plug with wet hands.		N/A
	h) Inversion Tables -		N/A
	1) The markings required by 81.7.1 shall be included in the important safety instructions.		N/A
	i) Dog Treadmills		N/A
	1) "Warning - Risk of Choking - Do not attach leash or harness to the treadmill frame."		N/A
	2) If the treadmill is provided with a safety speed control (see 42.1.8), "Warning - Risk of Choking - Attach the Safety Key to the leash or harness. Always use the Safety Key when using the treadmill."		N/A
	3) "Warning - Risk of Injury - Do not leave dog unattended on treadmill. Constant supervision is required to prevent injury."		N/A
	4) "Warning - Risk of Injury - This dog treadmill is not designed or intended for persons to use. Do not allow a child to use this treadmill. Keep children away."		N/A
	5) The applicable caution and warning statements from Dog Treadmills, Section 81.8.		N/A
	j) Agility trainers provided with a footboard:		N/A
	1) To reduce the risk of injury, place the footboard on a flat, horizontal, and stable surface. Do not place or use the footboard on a slippery surface.		N/A
	2) To reduce the risk of injury, do not use the footboard with wet shoes, wet feet, or socks.		N/A
	3) To reduce the risk of injury, do not use the footboard if the surface is wet. If the footboard surface becomes wet, dry the surface before using.		N/A
	k) Massagers with moving parts that may cause injury to persons, including Shiatsu Massagers -		N/A
	1) The following item shall be included following the heading "WARNING:"		N/A
	i) Do not use massager in close proximity to loose clothing or jewelry.		N/A
	ii) Keep long hair away from massager while in use.		N/A
	l) Exercise Machines		N/A
	1) The instruction specified in 83.5(3), shall be replaced by the following:		N/A
	i) This appliance is not intended for use by persons with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Keep children under the age of 13 away from this machine.		N/A
84	Operating Instructions		P
84.1	Operating instructions shall include all information needed to operate the appliance as intended.		P

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
84.2	If an appliance having a dual-voltage motor is provided with an attachment plug, instructions shall be provided to indicate the type of plug that should be used if the appliance is reconnected for the alternate voltage.		N/A
84.3	An appliance provided with a 2-blade, polarized attachment plug shall be provided with the following instructions or the equivalent: To reduce the risk of electric shock, this appliance has a polarized plug (one blade is wider than the other). This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician to install the proper outlet. Do not change the plug in any way.		N/A
84.4	A massage type footbath shall be provided with instructions to the user not to exceed the maximum fill line while filling the appliance.		N/A
84.5	If a dog treadmill can be folded-up for the purpose of storage, the operating instruction shall clearly instruct the user regarding how to fold, lock and store the treadmill. See 81.8.2.		N/A
84.6	For a dog treadmill, the instruction manual shall instruct the user regarding the proper operation and functioning of the power on/off switch, circuit breaker, start/stop switch and other controls on the control panel, safety key, and the emergency stop switch.		N/A
84.7	An agility trainer shall include use instructions regarding connecting the appropriate devices to the connectors provided on the control panel.		N/A
85	User-Maintenance Instructions		P
85.1	User-maintenance instructions shall include:		P
	a) Instructions for cleaning and user maintenance operations recommended by the manufacturer, such as lubrication or nonlubrication, and a statement to the user that any other servicing should be performed by an authorized service representative or that the appliance has no user serviceable parts.		P
	b) Instructions for an appliance employing an automatically reset thermal limiter that shuts off the entire appliance shall inform the user what to expect if the thermal limiter operates.		N/A
	c) Specific instructions for the proper method of storage of the cord, the total appliance, and the like, when the appliance is not in use, and for care of the cord while in use (for example, for a hand-supported product, untwisting).		N/A
	d) In the case of an appliance intended to be used with water additives, conditioners, or other solutions with or without water, specific instructions regarding the proper liquid or additive to use and the amount to be used in conjunction with the appliance.		N/A
86	Grounding/Double Insulation Instructions		N/A
86.1	For a grounded appliance, the instructions shall include those instructions in (a) - (d) applicable to the appliance. For a double insulated appliance the instructions shall include (e).		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	a) For all grounded, cord-connected products:		N/A
	GROUNDING INSTRUCTIONS		N/A
	This product must be grounded. If it should malfunction or breakdown, grounding provides a path of least resistance for electric current to reduce the risk of electric shock. This product is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.		N/A
	DANGER - Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the product is properly grounded. Do not modify the plug provided with the product - if it will not fit the outlet, have a proper outlet installed by a qualified electrician.		N/A
	b) For a grounded, cord-connected product rated less than 15 A and intended for use on a nominal 120-V supply circuit, the instructions in either (1) or (2):		N/A
	1) This product is for use on a nominal 120-V circuit, and has a grounding plug that looks like the plug illustrated in sketch A in Figure 86.1. A temporary adapter that looks like the adapter illustrated in sketches B and C may be used to connect this plug to a 2-pole receptacle as shown in sketch B if a properly grounded outlet is not available. The temporary adapter should be used only until a properly grounded outlet (sketch A) can be installed by a qualified electrician. The green colored rigid ear, lug, or the like extending from the adapter must be connected to a permanent ground such as a properly grounded outlet box cover. Whenever the adapter is used, it must be held in place by a metal screw.		N/A
	2) This product is for use on a nominal 120-V circuit and has a grounding plug that looks like the plug illustrated in sketch A in Figure 86.1. Make sure that the product is connected to an outlet having the same configuration as the plug. No adapter should be used with this product.		N/A
	c) For all other grounded, cord-connected products:		N/A
	This product is for use on a circuit having a nominal rating more than 120 V (or "This product is rated more than 15 A and is for use on a circuit having a nominal rating of 120 V ") and is factory-equipped with a specific electric cord and plug to permit connection to a proper electric circuit. Make sure that the product is connected to an outlet having the same configuration as the plug. No adapter should be used with this product. If the product must be reconnected for use on a different type of electric circuit, the reconnection should be made by qualified service personnel.		N/A
	d) For a permanently connected product:		N/A
	GROUNDING INSTRUCTIONS		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
	This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.		N/A
	e) For a double-insulated, cord-connected product:		N/A
	SERVICING OF DOUBLE-INSULATED PRODUCTS		N/A
	In a double-insulated product, two systems of insulation are provided instead of grounding. No grounding means is provided on a double-insulated product, nor should a means for grounding be added to the product. Servicing a double-insulated product requires extreme care and knowledge of the system, and should be done only by qualified service personnel. Replacement parts for a double-insulated product must be identical to the parts they replace. A double-insulated product is marked with the words "DOUBLE INSULATION" or "DOUBLE INSULATED." The symbol (square within a square) may also be marked on the product.		N/A
	APPENDIX A		N/A
	Specific Requirements for Exercise Machines with Power Generating Function and Utility-Interactive Connectivity		N/A
	INTRODUCTION		N/A
A.1	Scope		N/A
A.1.1	These requirements apply to exercise machines (ie; stationary bicycles, elliptical trainers, stair climbers, treadmills) covered under this Standard, that have the additional feature of generating electrical power from user exercise and converting this to output power to be connected to a building branch circuit, effectively serving as a generator. See A.2.4.		N/A
A.1.2	These requirements cover exercise machines with an on-board generator and inverter, with provision for connecting output power to building branch circuit power. These exercise machines are utility-interactive and can both accept power from the branch circuit as well as supply power back to the supply circuit.		N/A
A.1.3	These requirements do not cover:		N/A
	a) Exercise machines with output power for standby use.		N/A
	b) Exercise machines with output power that charges standby battery packs which are separate from the exercise machine.		N/A
	c) Exercise machines with output power that provides power directly to other loads such as appliances, lighting, etc. via receptacle or interconnection cord that is part of the exercise machine.		N/A
A.1.4	The products covered by these requirements, when connected to building power, must be connected in accordance with the National Electric Code, ANSI/NFPA 70.		N/A
A.2	Glossary		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
A.2.1	DRAIN RESISTOR - A resistive element intended for dissipating a quantity of unneeded or excess power into heat, in an exercise machine with power generating feature, such as when the power generated is not being provided to a branch circuit connected load. An electronic component resistor used as part of an electronic control circuit (ie; on a circuit board) is not considered a drain resistor for the purposes of these requirements.		N/A
A.2.2	INVERTER - An electronic device that changes dc power to ac power.		N/A
A.2.3	UTILITY-INTERACTIVE INVERTER - An inverter intended for use in parallel with an electric utility to supply common loads.		N/A
A.2.4	POWER GENERATING UTILITY-INTERACTIVE CONNECTIVITY (PGUIC) - A term used to characterize features for generating electrical power from user exercise and converting this to output power to be connected to a building branch circuit, effectively serving as a generator.		N/A
A.2.5	STANDBY USE - Providing an alternate source of electrical power to loads in buildings and facilities in the event that the primary power source fails, typically connected via a transfer switch.		N/A
A.3	Components		N/A
	In addition to the requirements of this Standard, the following requirements apply.		N/A
A.3.1	A utility-interactive inverter and its electrical interconnection shall comply with the applicable requirements of:		N/A
	a) The Standard for Inverters, Converters, Controllers and Interconnection System Equipment for Use With Distributed Energy Resources, UL 1741;		N/A
	b) The Standard for Interconnecting Distributed Resources with Electric Power Systems, IEEE 1547; and		N/A
	c) The Standard for Conformance Test Procedures for Equipment Interconnecting Distributed Resources with Electric Power Systems, IEEE 1547.1.		N/A
A.3.2	A rotational generator used to produce electric power, provided as part of an exercise machine, shall comply with:		N/A
	a) The applicable requirements for general purpose or component motors of Section 5.16 of this Standard, as applicable, or		N/A
	b) The Standard for Rotating Electrical Machines - General Requirements, UL 1004-1; and the Standard for Electric Generators, UL 1004-4.		N/A
A.3.3	A drain resistor, when provided, shall be included with and comply with all tests required by this Standard for the end product. Additionally, electrical insulating material used as part of the resistor construction shall comply with Section 15 of this Standard.		N/A
	CONSTRUCTION		N/A
A.4	Power Supply Connections		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
A.4.1	An exercise machine intended to be connected to a branch circuit system of a building, shall be connected in accordance with the following, and shall be in accordance with applicable parts of the National Electric Code, ANSI/NFPA 70.		N/A
A.4.2	The method of supply connection shall be:		N/A
	a) Cord connection utilizing Type SJ, SJT, SJO cord, or a type at least equally serviceable for the application, and terminated or connected as specified in A.4.3 and A.4.4; or		N/A
	b) Other methods permitted by Standard For Safety For Inverters, Converters, Controllers and Interconnection System Equipment for Use With Distributed Energy Resources, UL 1741 or National Electric Code, ANSI/NFPA 70 for utility-interactive equipment.		N/A
A.4.3	Cord Termination at building end - If cord connection is employed for power supply connection, the method of cord termination and connection of the cord at the building circuit end shall be one of the following:		N/A
	a) Cord terminated in a standardized twist-lock attachment plug configuration, such as a NEMA L5-15P.		N/A
	b) Cord terminated with a non-standardized attachment plug configuration, intended for plug-in connection to appropriate mating device (connector or receptacle) installed in wall in the building (See A.4.5). Standard NEMA configurations of Appendix B of Standard for Attachment Plugs and Receptacles, UL 498, other than as specified in (a), shall not be employed.		N/A
	c) Other methods permitted by the Standard for Inverters, Converters, Controllers and Interconnection System Equipment for Use With Distributed Energy Resources, UL 1741 or National Electric Code, ANSI/NFPA 70 for utility-interactive equipment, provided that cord is terminated in minimum 6 inch long individual leads, intended for permanent connection to junction box or panel, and means provided to prevent transmission of strain to wiring connections when exercise machines are moved (e.g., via permanent securement of exercise machine, breakaway device, or equivalent).		N/A
A.4.4	Cord Termination at product end - If cord connection is employed for power supply connection, the method of connection of the cord at the exercise machine end shall be:		N/A
	a) Attached via strain relief, with individual leads connected internally to the exercise machine. Strain relief means and internal connection means shall comply with this Standard;		N/A
	b) General use cord set (i.e.; detachable power supply cord) of standard configuration (i.e. IEC 60320-1 type C13, C15) connection at exercise machine end, additionally secured to the exercise machine via means requiring a tool for detachment; or		N/A
	c) General use cord set other than standard configuration connection at exercise machine end as specified in (b).		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
A.4.5	If a non-standardized attachment plug configuration is used as specified in A.4.3(b), the female wall receptacle or mating device shall be provided by the exercise machine manufacturer along with instructions for proper installation of the receptacle by qualified personnel.		N/A
	PERFORMANCE		N/A
A.5	General		N/A
A.5.1	The tests of Sections 44 - 76 as applicable shall be conducted. Additions or modifications to the tests shall be as noted in this Appendix.		N/A
A.5.2	Any applicable tests from the Standard Inverters, Converters, Controllers and Interconnection System Equipment for Use with Distributed Energy Resources, UL 1741 for the inverter not conducted on the inverters, or dependent on the combination of the inverter and exercise machine combination, shall be conducted as part of this evaluation.		N/A
A.5.3	Cord-connected exercise machines with PGUIC where the pins are accessible at the attachment plug or appliance inlet without the use of a tool shall be subjected to the Backfeed Protection Test as specified in Annex FFF of Standard for Uninterruptible Power Systems, UL 1778.		N/A
A.6	Rating		N/A
A.6.1	If the exercise machine with PGUIC can consume power in any mode of operation from the building supply to which it is connected, it shall be rated in accordance with Section 80.		N/A
A.6.2	In addition to any rating required by A.6.1, exercise machines with PGUIC shall be rated in accordance with utility interactive ratings of Table 62.1 of the Standard for Inverters, Converters, Controllers and Interconnection System Equipment for Use With Distributed Energy Resources, UL 1741.		N/A
	MARKINGS		N/A
A.7	General		N/A
A.7.1	Except as noted below, exercise machines with PGUIC feature shall be marked as required by Section 81. Additionally, the inverter component shall be marked as required by the Standard for Inverters, Converters, Controllers and Interconnection System Equipment for Use With Distributed Energy Resources, UL 1741.		N/A
	Exception: Markings required on the inverter by UL 1741 are not required to be provided on the inverter if equivalent marking is factory installed with the exercise machine.		N/A
A.7.2	Exercise machines with PGUIC shall be marked with the following text or equivalent:		N/A
	WARNING - Improper installation may cause fire or electric shock. Connect only to a dedicated branch circuit suitable for backfeed. Do not disconnect under load. See installation instructions for power connection.		N/A

UL 1647			
Clause	Requirement – Test	Result – Remark	Verdict
A.7.3	For cord connected machines the marking specified in A.7.2 shall be provided on a cord tag:		N/A
	a) Complying with Section the Permanence of Cord Tag Test, 60, of the Standard for Motor-Operated Appliances UL 73, and		N/A
	b) Applied to the power supply cord within 6 inches of the individual leads or face of the attachment plug.		N/A
A.7.4	For permanently connected machines the marking specified in A.7.2 shall be provided near the field wiring terminations.		N/A
	INSTRUCTIONS		N/A
A.8	General		N/A
A.8.1	Except as noted below, exercise machines with PGUIC feature shall be provided with instructions as required by Sections 82 - 86.		N/A
A.8.2	The exercise machines shall include shall include instructions required by Sections 65 and 66 of the Standard for Inverters, Converters, Controllers and Interconnection System Equipment for Use With Distributed Energy Resources, UL 1741.		N/A
	Exception: Inverter instructions of UL 1741 are not required to be provided if equivalent instructions are provided with the exercise machine.		N/A
A.8.3	The instructions of 83.5 shall include the text of the marking specified in A.7.2.		N/A
A.8.4	The installation instructions shall include the following, or equivalent:		N/A
	a) The product must be installed on a dedicated branch circuit.		N/A
	b) The branch circuit protection must be suitable for backfeed.		N/A
	c) The individual branch circuit shall be installed by a qualified electrician in accordance with the National Electric Code, ANSI/NFPA 70.		N/A
	d) Specification of the maximum number of exercise machines with PGUIC feature to be installed on an individual branch circuit and indicate that exercise machines with PGUIC feature should not be installed in numbers greater than specified.		N/A
	e) For cord and plug connected machines, identification of the appropriate receptacle to be installed to mate with the attachment plug provided on the power supply cord and, for a non-standardized configuration, indicate that the receptacle is provided with the exercise machine.		N/A

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
5	Construction		P
5.1	General		P
5.1.1	Components: Electrical components provided as part of appliances and auxiliary electrical equipment shall conform to the particular Standard of the Canadian Electrical Code, Part II, covering such components and shall also be suitable for their respective applications.		P
5.1.2	Stability: Appliances other than hand-held appliances shall meet the requirements of Clause 6.10. As an alternative, the appliance may be provided with a bracket or other device for being secured to a floor or wall so as to achieve the necessary stability, provided that it is marked in accordance with Clause 7.14.		N/A
5.1.3	Backflow prevention		N/A
5.2	Enclosures		P
5.2.1	General: Enclosures of electrical appliances shall be constructed to provide the strength and rigidity necessary to resist the normal abuse to which they might be subjected, as determined by the applicable physical abuse tests of Clause 6.11.		P
5.2.2	Protection of electrical parts: Electrical parts of appliances, except power supply cords, shall be located or enclosed to provide protection against accidental contact with bare or single-insulated live parts that could present a shock hazard. Parts of outer enclosures that are intended to be removed, without the use of tools, by the user of the appliance (to permit the attachment of accessories, for operating adjustments, etc.) shall not be considered a suitable means of protection against shock hazard unless the supply cord must be removed from the appliance before disassembly. Insulated brush caps do not require additional enclosures.		P
5.2.3	Supply cord material		N/A
5.2.4	Liquid containers: Appliances having a liquid container that can be overfilled in normal use shall comply with the overfill test specified in Clause 6.9.11.1, and portable units having liquid containers that can tip over and spill the liquid shall comply with the tip-over test specified in Clause 6.9.11.2.	No such part.	N/A
5.2.5	Nonmetallic enclosures for live parts shall		N/A
	a) comply with the oven conditioning requirements of Clause 6.21;		N/A
	b) not be in contact with incandescent lamps;		N/A
	c) if part of the insulation system, be moisture-absorption resistant as determined by the moisture-absorption test of Clause 6.18; and		N/A
	d) comply with the flame test requirements of Clauses 5.2.6 to 5.2.8, as applicable.		N/A

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
	Enclosures of switches and controls that comply with Clause 5.11.1 shall be exempt from this requirement.		N/A
5.2.6	Flammability of enclosures of unattended appliances		N/A
5.2.7	Flammability of enclosures of attended appliances		P
5.2.8	Flammability of enclosures: Enclosures of appliances that have momentary contact switches or are intended to be hand-held during operation shall comply with the horizontal burning (HB) test in CAN/CSA-C22.2 No. 0.17. For appliances containing open components without enclosures or component enclosures not complying with the applicable Standard of the Canadian Electrical Code, Part II, the appliance enclosure shall comply with the high-current arc ignition test in CAN/CSA-C22.2 No. 0.17.	Refer to CDF.	P
5.2.9	Except for parts that are necessarily exposed during normal operation, moving parts that can pose a hazard (e.g., pulleys, belts, and gears) shall be enclosed or guarded to prevent accidental contact. The means used for enclosing or guarding shall comply with the probe test specified in Clause 5.2.12.3 or 5.2.12.4.		N/A
5.2.10	Enclosures of outdoor equipment: Enclosures for outdoor equipment (e.g., barbecue motors) shall meet the requirements of Clause 5.2.14.1.	Indoor use only.	N/A
5.2.11	Enclosures of equipment used in a garage: Equipment intended for use in a garage or similar location and containing sparking or arcing parts (e.g., switches and commutators) shall be a) totally enclosed; or b) constructed to i) prevent the escape of hot metal, sparks, and flaming particles; and ii) keep such igniting materials more than 50 mm from any side of the enclosure that can be placed on the floor or another support. Equipment shall be marked of accordance with Clause 7.9.	Not such type.	N/A
5.2.12	Openings in enclosures	Evaluated in end product	N/A
5.2.13	Enclosure doors and covers	No such part.	N/A
5.2.14	Tests for outdoor and car wash equipment	Not such type.	N/A
5.3	Protection against corrosion		N/A
5.3.1	Iron and steel parts: Iron and steel parts shall be protected against corrosion in accordance with CAN/CSA-C22.2 No. 0.		N/A
5.3.2	Protection of surfaces: The surfaces of metal parts shall be protected, if necessary, against scaling, flaking, and other effects of corrosive action that might, in normal use, cause reduction in the dielectric strength of appliances or reduce the spacings to smaller than those required by Clause 5.16.		N/A
5.4	Mechanical assembly		N/A

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
5.4.1	Security from vibration: Appliances shall be so assembled that they will not likely be affected adversely by the vibration of normal operation. Wire connectors shall be taped unless applied by a compression tool or a machine.		N/A
5.4.2	Fastening: Switch assemblies, lampholders, receptacles, or controls provided as parts of appliances shall be fastened securely and rigidly and shall be prevented from turning by means other than friction between surfaces. Lockwashers shall not be used to prevent rotation of the body of rotary switches or field wiring terminals.		N/A
5.4.3	Connection to live metal parts: Connections to live metal parts (e.g., brushholders) shall be such that a) the electrical connection is maintained; and b) the connection is prevented from turning or shifting in position by means other than friction between surfaces, if such motion would result in a reduction of spacings to smaller than those specified in Clause 5.16.		N/A
5.4.4	Splices and connections: Splices and connections shall be mechanically secure and shall provide adequate and reliable electrical contact. Except for printed circuit boards and hollow pin terminals into which the wire is inserted, soldered connections shall be made mechanically secure before being soldered if breaking or loosening of the connections could result in any hazardous condition. Splices shall be provided with insulation equivalent to that of the wires if the required spacing between splices and other metal parts is not met.		N/A
5.4.5	Brush caps: Brush caps of motors shall be threaded or otherwise constructed to prevent loosening.	No such part.	N/A
5.5	Supply connections		P
5.5.1	Permanently connected appliances		N/A
5.5.2	Cord-connected appliances and power-supply cords	Powered by class 2 adapter	P
5.6	Strain relief, flexing, and cord set retention		N/A
5.6.1	Strain relief: Strain relief shall be provided where a permanently attached power-supply cord enters an enclosure so that mechanical strain on the supply cord is not transmitted to terminals, splices, or internal wiring. Accessible interconnecting cords and cables that are permanently attached and carry hazardous voltages shall also be provided with a strain-relief device that complies with Clause 6.12.1.		N/A
5.6.2	Flat cords: In the case of flat cords (e.g., SPT and HPN) having parallel conductors that can be separated, the strain relief may be applied to the separated conductors, provided that the separated portion of the cord does not extend outside the appliance enclosure or bushing.		N/A

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
5.6.3	Permanently attached cords: A permanently attached power-supply cord, cable, or wiring that is subjected to flexing during normal use of the equipment shall withstand the flexing test specified in Clause 6.12.2.		N/A
5.6.4	Hand-held appliances: A hand-held appliance rated over 30 V that employs a cord set shall have the appliance plug retention system tested as specified in Clause 6.12.3.		N/A
5.7	Terminal parts	No such part.	N/A
5.7.1	General: Except as otherwise specified in Clause 5.7.2, terminal parts such as binding head screws, bolts, and studs shall not be smaller than Size No. 6.		N/A
5.7.2	Terminal parts of hand-held appliances: Terminal parts such as binding head screws, bolts, and studs of hand-held appliances shall not be smaller than Size No. 3.		N/A
5.7.3	Leads: Where leads in the terminal box are intended for connection to the power-supply conductors at the time of installation, they shall be <ul style="list-style-type: none"> a) of suitable ampacity and length; b) No. 18 AWG or larger; and c) Type CL751, CL902, CL1251, or an equivalent as specified in CSA C22.2 No. 127. 		N/A
5.7.4	Rigid wiring terminals: Rigid wiring terminals shall thread into metal and shall be prevented, by means other than friction, from turning or shifting that could result in reducing the spacings required by Clause 5.16.		N/A
5.8	Wiring		P
5.8.1	Internal wiring: Internal wiring and connection shall be located to prevent contact with moving parts and <ul style="list-style-type: none"> a) Rigid; or b) Mechanically held. 		P
5.8.2	Raceways: Raceways shall be smooth and free from projections, sharp edges, burrs, etc., that could cause abrasion of the insulation on conductors.		N/A
5.8.3	Holes: Holes in walls through which conductors pass shall have smoothly rounded bushings or shall have smooth, well rounded surfaces upon which conductors can bear.		N/A

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
5.8.4	Insulation: Internal wiring shall have a type of insulation recognized as suitable for the particular application, when considered with respect to <ol style="list-style-type: none"> a) the temperature and voltage to which the wiring will be subjected; b) exposure to oil or grease; and c) other conditions of service to which the wiring is likely to be subjected. 		P
5.8.5	Magnet Wire: The magnet wire of a coil may be used as a lead if the wire is <ol style="list-style-type: none"> a) connected directly to fixed terminals of brushholders, switches, terminal boards, and similar parts; b) not similar than No. 23 AWG copper or the equivalent, except for cord-connected appliances with an input of 300 W or less at 120 V, and 600 W or less at 240 V, in which case the wire may be smaller than No. 23 AWG; or c) provided with a sleeving of suitable insulating material that is securely fastened or supported and that meets the applicable requirements of CAN/CSA-C22.2 No. 198.1, except when <ol style="list-style-type: none"> i) not in contact with non-current-carrying conductive parts; or ii) having sufficient rigidity and so located that there is no likelihood of the spacings between bare live parts and non-current-carrying conductive parts becoming smaller than the required minimum, even if the wires break. 		N/A
5.8.6	Internal wire types: Internal wiring shall be of Type TEW, GTF, SEWF-1, SEW-1, TR, or an equivalent as specified in CSA C22.2 No. 127.		N/A
5.8.7	Ampacity: The ampacity of conductors shall be such that the limiting temperature for the insulation is not exceeded.		N/A
5.8.8	Connections: Connections in wiring shall have their sleeving, if provided, mechanically ensured.		N/A
5.8.9	Removal of covers: The removal of covers for coin or ticket collection in coin- or ticket-operated equipment shall not expose terminals, wiring, or other live parts.	Not such type.	N/A
5.9	Electrical insulation		P

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
5.9.1	General: Current-carrying parts other than magnet wire shall be supported on flame-resistant and moisture absorption resistant insulating materials such as porcelain, phenolic composition, or equivalent material and shall be in compliance with the HB test in CAN/CSA-C22.2 No. 0.17. Insulating materials of cord connected appliances rated 150 volts-to-ground or less shall comply with the moisture-absorption test of Clause 6.18.		P
5.9.2	Arcing: When subjected to the effects of arcing (e.g., by proximity to open electrical contact of switches or commutators), insulation shall be in compliance with the HB test in CAN/CSA-C22.2 No. 0.17.	No arcing part.	N/A
5.9.3	Arcing or sparking parts of equipment used in a garage: Parts that can create arcing or sparking (e.g., switches, receptacles, connectors, commutators, motors, etc.) shall be located not less than 460 mm above the floor level.	Not such type.	N/A
5.10	Motors		P
5.10.1	General: Motors shall comply with the applicable requirements of CSA C22.2 No. 100, except for motor enclosures, which shall meet the applicable requirements of this Standard.		P
5.10.2	Overheating protection: Motors shall have inherent overheating protection in accordance with CSA C22.2 No. 77. This requirement shall not apply to <ul style="list-style-type: none"> a) appliances having overload protection, consisting of a device that is responsive to motor current, rated or set at values not greater than specified in the Canadian Electrical Code, Part I; b) commercial appliances intended for permanent connection, in which the motor can be readily protected against overload at the time of installation in accordance with the Canadian Electrical Code, Part I, and that are marked in accordance with Clause 7.18; c) appliances having a momentary contact switch; d) appliances that are hand-held during the intended use; e) attended intermittent-duty household appliances that comply with Clause 6.7.3 e); or f) attended intermittent-duty household appliances incorporating a one-shot fusible device, which might or might not be installed by the manufacturer. 		P
5.10.3	Motor-operated pumping units for painting equipment: The motor of a motor-operated pumping unit for painting equipment with a roller-type applicator shall have overheating protection in accordance with CSA C22.2 No. 77. The pumping unit shall comply with the abnormal test of Clause 6.7.9.	Not such type.	N/A

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
5.10.4	Automatic-reset protective devices: Automatic-reset types of protective devices shall not be used in motor-operated equipment if the automatic restarting of motors could result in any hazardous conditions.	Not such type.	N/A
5.10.5	Optional thermal protectors: Appliances having motors with optional thermal protectors and marked or claimed to be thermally protected shall comply with the applicable requirements of CSA C22.2 No. 77.	Not such type.	N/A
5.10.6	Barbecue motors: Barbecue motors shall not reach temperatures higher than 65 °C above ambient temperature when tested in accordance with Clause 6.2.11.	Not such type.	N/A
5.11	Switches and controls		P
5.11.1	Switches and controls shall comply with the applicable requirements of a) CSA C22.2 No. 14; b) CSA C22.2 No. 24; c) CSA C22.2 No. 55; d) CSA C22.2 No. 111; e) CSA C22.2 No. 156; f) CSA C22.2 No. 61058-1; or g) CSA C22.2 No. E60730-1;		N/A
5.11.2	Voltage, current, and horsepower ratings: Switches and controls shall have voltage, current, and horsepower (where applicable) ratings not lower than those of the circuits that they control, or they shall be subjected to investigation to determine their acceptability for the application.		P
5.11.3	Safety interlock switches, mechanisms, and controls: Safety interlock switches, mechanisms, and controls shall meet the requirements of Clauses 6.8.1 and 6.8.2.	No such part.	N/A
5.11.4	Manually operated control devices: Manually operated control devices shall have the OFF position clearly indicated, unless their construction or operating conditions render this unnecessary. The symbol “O” may be used to indicate the OFF position.		P
5.11.5	Cord-connected equipment: Cord-connected equipment having a motor rated more than 1/3 hp shall be provided with a switch for controlling the motor. The switch shall not be connected in the circuit of the identified conductor unless this connection results in the opening of all ungrounded supply conductors to the motor.		N/A
5.11.6	Painting equipment: For painting equipment utilizing a roller-type applicator and having a pressure-actuated switch that operates under normal use, the endurance test specified in Clause 6.8.2.2 shall be conducted.	Not such type.	N/A
5.12	Suppressors	No such part.	N/A
5.12.1	General: Suppressors for radio interference shall comply with CSA C22.2 No. 8.		N/A

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
5.12.2	Connection: Suppressors shall not be connected between live parts and exposed conductive parts, except as is necessary for normal operation of the equipment.		N/A
5.13	Lampholders	No such part.	N/A
5.13.1	General: Lampholders shall comply with the applicable requirements of CSA C22.2 No. 43.		N/A
5.13.2	Extra-low-voltage lamps: Lampholders for extra-low-voltage lamps (e.g., 30 V or less) shall not be connected across parts of motor windings if the rating of the motor is higher than 150 V.		N/A
5.13.3	Mounting: Lampholders and lamps shall be securely mounted and protected from mechanical damage by a) their location; b) the type of lampholder; or c) a suitable guard.		N/A
5.13.4	Current and voltage ratings: Lampholders shall have current and voltage ratings suitable for the circuit in which they are connected.		N/A
5.13.5	Construction: Lampholders shall be of dead-front construction.		N/A
5.13.6	Screw-shells Screw-shells of lampholders shall be connected in the circuit of the identified conductor if one is provided.		N/A
5.13.7	Shades: Shades for lampholders shall be supported independently of the lampholders.		N/A
5.14	Protective devices and fuseholders		N/A
5.14.1	Construction: Protective devices and fuseholders shall be of dead-front construction unless they are located where access is restricted in accordance with Clause 5.2.14. Fuseholders shall comply with CSA C22.2 No. 39 or the CAN/CSA-C22.2 No. 4248 series.		N/A
5.14.2	Polarization of overcurrent protective device: A single-pole overcurrent protective device shall be connected between the ungrounded branch circuit conductor and the load, except where the overcurrent protection device is located in that part of a circuit that is connected by an unpolarized connector, in which case either or both conductors may be protected. The screwshell of plug-fuse-type fuseholders and the cap end of extractor-post cartridge type fuseholders shall be connected to the load.		N/A
5.14.3	Ungrounded or double-insulated equipment: Ungrounded or double-insulated equipment provided with accessible fuseholders and equipment rated 240 V shall employ dead-front shockproof-type fuseholders, or shall comply with the marking requirements of Clause 7.8.		N/A

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
5.15	Transformers: Transformers shall comply with CSA C22.2 No. 66.1, CSA C22.2 No. 66.2, and CSA C22.2 No. 66.3, as applicable.		N/A
5.16	Spacings	Powered by class 2 adapter	N/A
5.16.1	General: Except as otherwise specified in Clauses 5.16.2 and 5.16.3, spacings shall be not smaller than those specified in Table 5. If bare live parts are not rigidly supported, or if movable non-current-carrying conductive parts are in proximity to bare live parts, the constructions shall be such that the minimum spacings specified in Table 5 will be maintained under all conditions.		N/A
5.16.2	Spacings within electrical components: The spacings within motors, switches, lampholders, or other devices supplied as part of equipment shall comply with the applicable Standard of the Canadian Electrical Code, Part II. If no such Standard exists, spacings shall be the subject of investigation. Spacings within motors complying with Table 5 need not comply with the component spacing requirements of CSA C22.2 No. 100.		N/A
5.16.3	Use of insulating barriers: An insulating barrier or liner may be used to obtain the spacings required by Clause 5.16.2, provided that it is a) of adequate dielectric strength and resistant to moisture absorption; b) not adversely affected by arcing and is suitable for the temperature encountered; c) of adequate mechanical strength and permanently held in place by means other than adhesives; d) not less than 0.66 mm thick, except that it may be not less than 0.33 mm thick if used in conjunction with a spacing not less than one-half of that required by Clause 5.16.2; e) mica with a thickness of 0.25 mm or another insulating material meeting the requirements of items a) and b) and of suitable thickness, held in position between parts involved or by other mechanical means (in which case no spacing is required), and adhesive are not used.		N/A
5.16.4	Magnet Wire: Magnet (e.g., film-coated) wire shall be considered a bare live part for the purpose of determining compliance of equipment with the spacing requirements of this standard.		N/A
5.17	Special safety features		N/A
5.17.1	General: Appliances or equipment involving mechanical or other hazards shall be provided with protection that does not interfere with the intended manner of operating the equipment.		N/A

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
5.17.2	Loosening of parts: Movement of parts during the intended operation of equipment shall not result in any loosening of the parts that could pose a hazard of personal injury (e.g., the exposure of moving or bare live parts).		N/A
5.17.3	Cutting mechanisms: Cutting mechanisms shall be guarded, except where exposure of the blades or other equivalent parts is necessary for their operation.	No such part.	N/A
5.18	Bonding and grounding		N/A
5.18.1	General: Unless double insulated, equipment shall be constructed comply with CSA C22.2 No. 0.4, except as otherwise specified in Clause 5.18.2.		N/A
5.18.2	Equipment, other than sprayers, need not comply with clause 5.18.1 where a) exposed metal parts are not likely to become energized, and the equipment complies with Clause 8.5; or b) it is cord-connected household equipment that is hand-held or table-mounted and is neither connected to the water supply or drainage during use nor intended to be immersed partially or entirely for cleaning.		N/A
5.19	Pressure vessels and parts subject to pressure	No such part.	N/A
5.20	High-pressure airless sprayers	Not such type.	N/A
5.21	Painting equipment with a roller-type applicator	Not such type.	N/A
5.22	Printed circuit boards		P
5.22.1	General: Printed circuit boards shall be of heat-resistant and moisture-absorption-resistant insulating material and, except as specified in Clause 5.22.2, shall comply with the V-1 or VTM-1 flame test requirements of CAN/CSA-C22.2 No. 0.17.		P
5.22.2	Class 2 circuits: Printed circuit boards supporting only Class 2 circuits as defined in the Canadian Electrical Code, Part I, or in CSA C22.2 No. 66.1 and CSA C22.2 No. 66.3 shall comply with the HB flame test in CAN/CSA-C22.2 No. 0.17.		P
5.22.3	Spacing between conductors and components: Except where an appliance complies with Clause 6.7.4, spacings between conductors or components, or both, shall be not smaller than specified in Table 5.		N/A
5.22.4	Internal spacings: Where spacings cannot be readily ascertained (e.g., spacings internal to a component), the printed circuit board shall withstand the application of the dielectric strength test voltage specified in Table 6 for not less than 1 s without breakdown, unless the equipment complies with Clause 6.7.4.		N/A
5.22.5	Component failure: Where the failure of a component can cause a fire or shock hazard, the appliance shall comply with Clause 6.7.4		P
5.23	Motorized chairs, beds, and exercise appliances	Not such type.	N/A

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
5.24	Rechargeable battery-operated pedestrian controlled material moving or transporting appliances	Not such type.	N/A
6	Tests		P
6.1	General		P
6.2	Maximum normal load		N/A
6.3	Starting		N/A
6.4	Rating		P
6.5	Temperature (normal)		P
6.6	Dielectric strength		P
6.7	Temperature (abnormal)		P
6.8	Overload and endurance (switches and controls)		N/A
6.9	Leakage current		N/A
6.10	Stability		N/A
6.11	Physical abuse		N/A
6.12	Strain relief, flexing, and cord set retention		N/A
6.13	Speed control - Limited short-circuit		N/A
6.14	Backflow		N/A
6.15	Flaming oil - Perforated metal panels or wire screens		N/A
6.16	Hydrostatic strength — Pressure vessel and system parts		N/A
6.17	High-current arc ignition		N/A
6.18	Moisture-absorption resistance of insulation		N/A
6.19	Standard flame		N/A
6.20	Motorized chairs, beds, and exercise appliances		N/A
6.21	Oven conditioning (nonmetallic enclosures)		N/A
7	Marking		P
7.1	General: Equipment shall be plainly marked, in a permanent manner, in a place where the details are readily visible, with the following: a) the manufacturer's name, trademark, trade name, or other recognized symbol of identification; b) the catalogue, style, model, or other type designation; c) the voltage; d) the letters "ac", if the appliances are not suitable for use on dc, after the voltage, the symbol "~", or the frequency in Hz, if necessary; e) the number of phases, unless obviously intended for single-phase use only; f) the rated input in amperes or watts; and g) the month and year of manufacturer, at minimum, shall be marked on each product in a location accessible with the use of tool. Date coding, serial numbers, or equivalent means may be used.		P
7.2	Compliance: Markings shall comply with CAN/CSA-C22.2 No. 0.		P
7.3	Equipment for intermittent use: Equipment intended for intermittent or short-term operation shall be marked accordingly, unless the nature of its use is obvious.		N/A

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
7.4	Separately supplied components: Where required components such as a capacitor or a capacitor-transformer unit are not supplied as part of the equipment, suitable instructions regarding the proper ratings and connections of these separately supplied components shall be provided. This marking may take the form of a suitable wiring diagram or equivalent attached to the inside of a connection box or equivalent.	No such part.	N/A
7.5	Single-motor equipment: In equipment having a single motor as the only electric-energy-consuming component, the electrical rating that appears on the motor nameplate need not be shown elsewhere on the appliance if the nameplate is visible after the motor has been installed in the appliance. This does not preclude the necessity of opening doors or removing simple covers when motors are enclosed within permanently connected equipment.		N/A
7.6	Voltage: The appliance shall be marked in a permanent manner to indicate the particular voltage for which it is connected when shipped from the factory and when a) it is cord-connected appliance equipped with a multi-voltage motor and the motor nameplate is used to show the electrical rating of the equipment as specified in Clause 7.5; or b) it is a multi-voltage appliance as specified in Clause 5.5.2.4.		N/A
7.7	Electric beds: Electric beds intended for household use shall be plainly marked “FOR HOUSEHOLD USE ONLY” or with equivalent wording.	Not such type.	N/A
7.8	Cleaning instructions: If the construction of equipment is such that a cleaning or similar servicing by the user (e.g., the replacement of pilot lamps, fuses, ink ribbons, or paper rolls) could result in accidental contact due to the exposure of normally enclosed or protected live parts, the equipment shall be clearly and permanently marked with the following warning: DISCONNECT FROM SUPPLY CIRCUIT BEFORE OPENING.	No user servicing part.	N/A
7.9	Equipment for garage use: Equipment intended for use in a garage or similar location shall be plainly and permanently marked with the warning “DO NOT USE BELOW GARAGE FLOOR OR GRADE LEVEL” in letters of a contrasting colour to the background and not less than 2.8 mm high. Embossed letters shall be raised at least 0.4 mm.	Not such type.	N/A

CSA C22.2 NO.68			
Clause	Requirement – Test	Result – Remark	Verdict
7.10	Receptacles: If receptacles, as specified in CSA C22.2 No. 42, are provided for any purpose, they shall be clearly and permanently marked on or adjacent to the receptacle with the maximum load or intended purpose. This requirement does not apply to special-type receptacles or connectors.	No such part.	N/A
7.11	Non-time-delay equipment Equipment that does not start and attain normal running speed when connected to a circuit protected by an ordinary fuse (i.e., not a time-delay type) as specified in Clause 6.3 shall be plainly marked with the following: IF CONNECTED TO A CIRCUIT PROTECTED BY FUSES, USE TIME-DELAY FUSE MARKED "D".	Not such type.	N/A
7.12	Fuse rating: Fuse ratings shall be clearly and permanently marked adjacent to each fuseholder.	No such part.	N/A
7.13	Supply conductor temperatures: The permanent marking "USE SUPPLY WIRES SUITABLE FOR ___°C" shall be located near the supply entrance or on the nameplate if the temperature in the terminal box or the compartment intended for the supply connections exceeds 60 °C during the normal temperature test. The temperature to be marked shall be 75, 90, or 110 °C for temperature ranges of 61 to 75 °C, 76 to 90 °C, or 91 to 110 °C, respectively.		N/A
7.14	Brackets: Equipment needing a bracket to provide the stability required by Clause 6.10 shall be marked to indicate the purpose and location of the bracket. This marking may appear on a paper label.		N/A
7.15	Combustible fluids: As required by Clause 5.20.4, appliances using cleaning fluids or other combustible fluids shall be marked with an identification of the recommended fluid or with the following: WARNING: USE A _____ FLUID HAVING A FLASH POINT HIGHER THAN 60 °C.		N/A
7.16	Sprayers	Not such type.	N/A
7.17	Painting equipment	Not such type.	N/A
7.18	Commercial appliances for permanent connection	Not such type.	N/A
7.19	Motorized chairs, beds, and exercise appliances As required by Clause 5.23.3, the control unit of an appliance shall be marked in a readily visible manner with the following or equivalent wording: WARNING: REMOVE CONTROL BOX (OR KEY, OR SAFETY PIN, AS APPLICABLE) WHEN NOT IN USE, AND STORE OUT OF REACH OF CHILDREN.	Not such type.	N/A
7.20	Connections to potable water	Not such type.	N/A
7.21	Air compressors	Not such type.	N/A
8	Cord-connected double-insulated appliances	Not such type.	N/A

---END---