

18HM1886 18HM1887

INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions as you may need them a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

ASSEMBLY AND INSTALLATION

1. Secure mounting bracket (6) to the outlet box (1) using box screws (7).
2. Connect the electrical wires as shown in Fig. 2, making sure that all wire nuts (8) are secured. If your outlet box (1) has a ground wire (4. green or bare copper), connect the fixtures ground wire (4) to it. Otherwise, connect the fixture ground wire (4) directly to the mounting bracket (6) using the ground screw (5) provided. After wires are connected, tuck them carefully inside the outlet box (1).
3. Place the fixture's backplate over the mounting bracket (6) and secure with rubber washer (9) and mounting bracket screws (10).
4. Install the bulb (bulbs not included).
(Don't exceed the maximum capacity recommended on the sockets).

INSTALLATION IS NOW COMPLETED

Fig.1

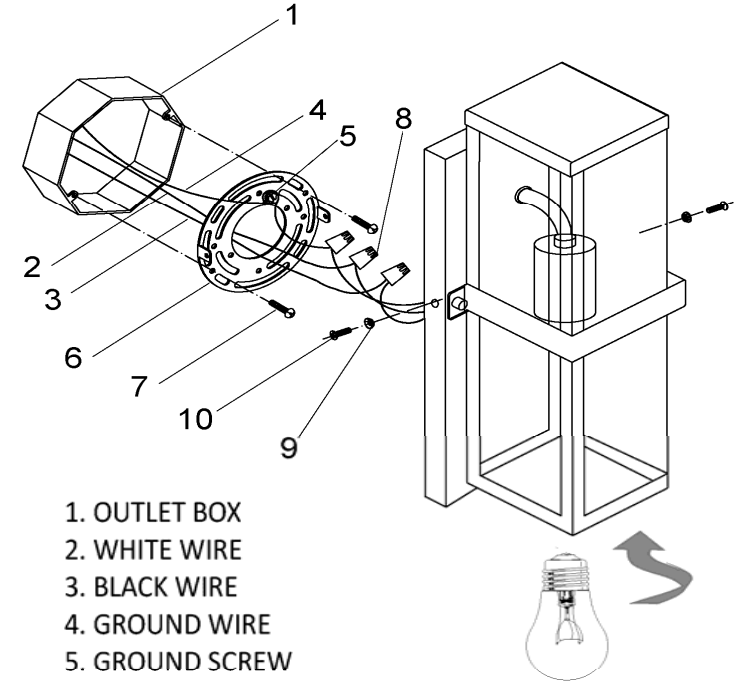

1. OUTLET BOX
2. WHITE WIRE
3. BLACK WIRE
4. GROUND WIRE
5. GROUND SCREW
6. MOUNTING BRACKET
7. BOX SCREW
8. WIRE NUT
9. RUBBER WASHER
10. MOUNTING BRACKET SCREW

Fig.2

